



PRODUCT SPECIFICATIONS


424AS Shock Absorbing Lanyard

Product Description:

This dual-leg shock-absorbing, tubular elastic web lanyard, with internal shock absorbing core, limits fall arrest forces to 900lbs.

Product Features:

- 1 15/16" tubular synthetic webbing
- Stretches to minimize tripping and snagging hazards
- Standard length of 6'
- length of approximately 4.5' when relaxed
- Additional snap-hooks available

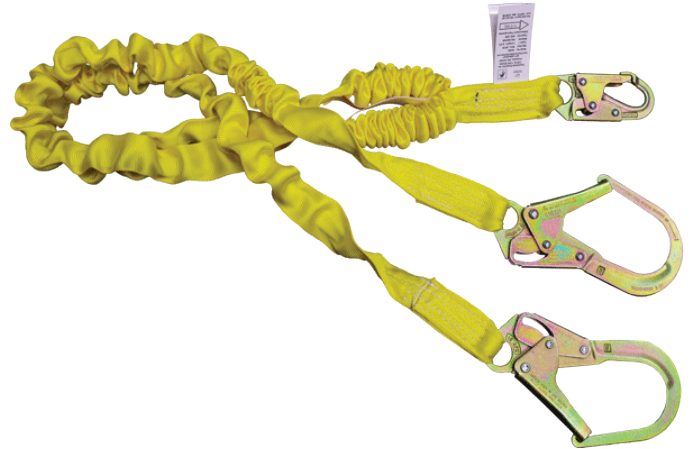

MATERIAL SPECIFICATIONS	
Hardware	Z136 Snap-hook, 2 1/4" gate opening. Cold-formed plated steel
	100% proof loaded to 3600 lbs min. tensile 5000 lbs
	100% gate loaded to 3600 lbs
	#Z74 snap hook 3/4" gate opening, cold formed plated steel
	100% proof loaded to 3600 lbs, min. tensile 5000 lbs
	100% gate loaded to 3600 lbs
Webbing	1 15/16" polyester tubular webbing, min tensile strength 6000 lbs
	1" tear-away
Thread	White bonded nylon

MATERIAL SPECIFICATIONS	
Lanyard Class	6' free fall
Arrest Force	900 lbs.
ANSI User Capacity	130 to 310 lbs.
OSHA User Capacity	310 lbs.

RELEVANT STANDARDS	
ANSI	ANSI Z359.1
OSHA	Meets or exceeds OSHA requirements

SIZES/LENGTHS
Standard length 6' additional sizes may be available.