



PRODUCT SPECIFICATIONS


450A Shock Absorbing Web Lanyard

Product Description:

This six foot web lanyard with a shock absorbing pack and a #Z74 locking snap-hook on each end limits fall-arrest forces to 900 lbs. when tested to OSHA and ANSI standards.

Product Features:

- High strength synthetic webbing
- Two self-locking snaps at each end (3/4" gates)
- 6' standard length, additional lengths available

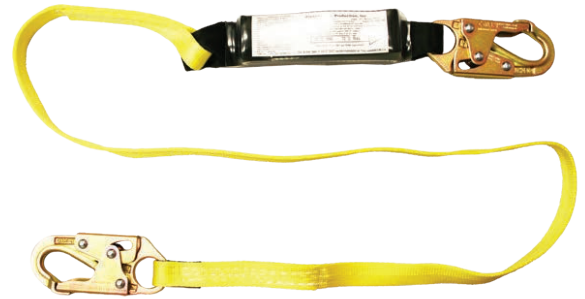

MATERIAL SPECIFICATIONS

Webbing	Yellow 1" nylon, tensile strength 6,000 lbs
	1-3/4" black polyester, minimum tensile strength 6,000 lbs
	1-3/4" polyester tear-away
Hardware	#Z74 snap-hooks: 3/4" gate opening, zinc plated steel
	100% proof loaded to 3,600 lbs min. tensile strength of 5,000 lbs
Thread	Polyester nubond

PERFORMANCE SPECIFICATIONS

ANSI User Capacity	130-310 lbs. Max
OSHA User Capacity	400 lbs. Max
Arrest Force	900 lbs
Lanyard Class	6' Free Fall

RELEVANT STANDARDS

ANSI	ANSI Z359.13-2013
OSHA	Meets or exceeds all OSHA requirements

SIZES/LENGTHS

Standard length of 6 Ft.
Additional sizes are available