



PRODUCT SPECIFICATIONS


450AB Shock Absorbing Lanyard

Product Description:

This adjustable web lanyard with pack style shock absorber limits fall arrest forces to 900 lbs. when tested to OSHA & ANSI standards.

Product Features:

- 1" polyester webbing with shock pack
- Adjustable lanyards ordered by longest length
- Adjust down to approximately half the length
- Additional snaphook options available

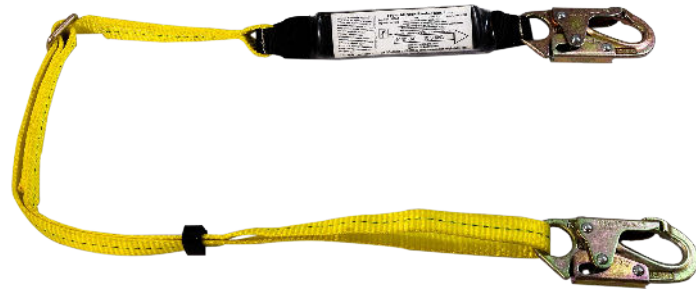

MATERIAL SPECIFICATIONS

Webbing	1" Polyester webbing minimum tensile strength 9,800 lbs.
	1-3/4" polyester tear-away,
	1-3/4" black polyester, minimum tensile strength 6,000 lbs
Hardware	#Z74 snap-hook: 3/4" gate opening, zinc plated steel
	100% proof loaded to 3,600 lbs min. tensile strength of 5,000 lbs
	N-452L adjuster: , zinc plated steel, min tensile strength 5,000 lbs
Thread	Polyester nubond

PERFORMANCE SPECIFICATIONS

ANSI User Capacity	130-310 lbs. Max
OSHA User Capacity	400 lbs. Max
Arrest Force	900 lbs
Lanyard Class	6' Free Fall

RELEVANT STANDARDS

ANSI	ANSI Z359.13-2013
OSHA	Meets or exceeds all OSHA requirements

SIZES/LENGTHS

Standard length 6' additional sizes available.
Item weight 2.2 lbs