



PRODUCT SPECIFICATIONS


464ASZ Shock Absorbing Lanyard

Product Description:

A 6 foot shock-absorbing web lanyard with an internal tubular elastic core. Limits fall arrest forces to 900 lbs when tested to OSHA and ANSI standards.

Product Features:

- Standard length of 6 feet compresses to 4 1/2' when not stretched

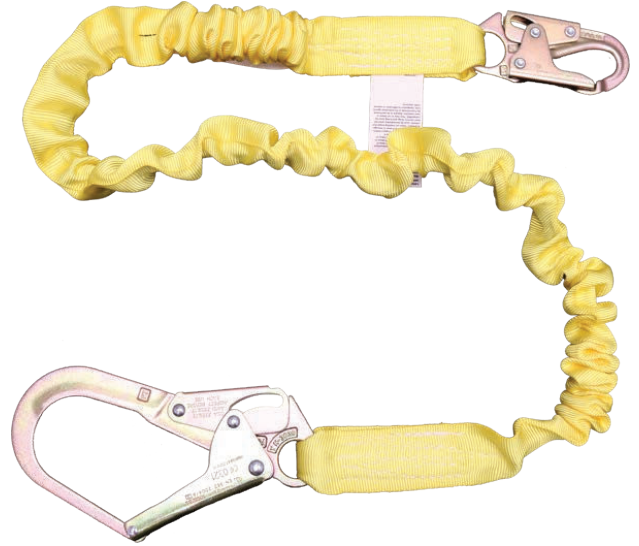

MATERIAL SPECIFICATIONS	
Hardware	#Z136 snap hook, 2 1/4" gate opening, cold-formed plated steel
	100% proof loaded to 3600 lbs, min tensile 5000 lbs
	100% gate loaded to 3600 lbs
	#Z74 snap hook, 3/4" gate opening, cold-formed plated steel
	100% proof loaded to 3600 lbs, min tensile 5000 lbs
	100% gate loaded to 3600 lbs
Webbing	1 15/16" polyester tubular webbing, min tensile strength 6000 lbs
Thread	White bonded nylon

MATERIAL SPECIFICATIONS	
Lanyard Class	6' Free Fall
Arrest Force	900 lbs.
ANSI User Capacity	130 to 310 lbs.
OSHA User Capacity	310 lbs.

RELEVANT STANDARDS	
ANSI	ANSI Z359.1
OSHA	Meets or exceeds OSHA requirements

SIZES/LENGTHS
Standard size of 6 feet. More lengths may be available