



PRODUCT SPECIFICATIONS


484A Dual Leg Lanyard

Product Description:

Six foot, dual-leg shock-absorbing, wire rope lanyard with Z136, 2 1/2" opening snaphooks on ends. 100% tie-off Limits fall-arrest forces to 900 pounds. Tested to OSHA and ANSI standards.

Product Features:

- 7/32" Vinyl covered wire rope
- Standard length 6', additional lengths available
- Additional snaphook options available

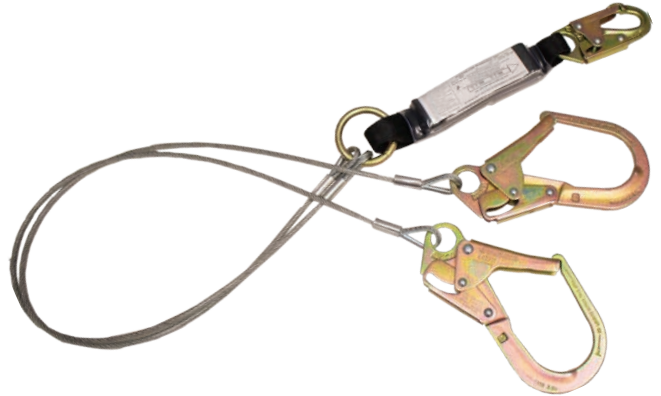

MATERIAL SPECIFICATIONS	
Cable	7/32" vinyl covered wire rope, min tensile strength 5,000 lbs.
Hardware	#Z74 plated alloy steel locking snaphooks 3/4" gate openings
	Snaphooks proof loaded to 3,600 lbs. min tensile 5,000 lbs
	#Z136 snap 1/2" gate opening, plated steel, 100% proof loaded to 3600 lbs,
	100% gate loaded to 3600 lbs, min tensile 5000 lbs

MATERIAL SPECIFICATIONS	
ANSI User Capacity	130 to 310 lbs.
OSHA User Capacity	400 lbs.
Lanyard Class	6' Free Fall
Max Fall Arrest Force	900 lbs.

RELEVANT STANDARDS	
ANSI	ANSI Z359.1
OSHA	Meets or exceeds OSHA requirements

SIZES/LENGTHS
Standard size of 6 feet. More lengths may be available