




**FrenchCreek**  
**FALL SAFETY**



2024  
**FULL LINE PRODUCT CATALOG**





# TABLE OF CONTENTS

# WHAT'S NEW?

CHECK OUT THE LATEST RELEASES FROM FRENCHCREEK



8-43



44-59

FULL BODY HARNESSES PAGES 8-43

LANYARDS PAGES 44-59

SNAPHOOKS & CARABINERS PAGES 60-65

ANCHORAGE CONNECTORS PAGES 66-75

SELF-RETRACTING LIFELINES PAGES 76-85

ROOFING, ROPE GRABS, LIFELINES PAGES 86-93

HORIZONTAL SYSTEMS PAGES 94-101

LADDER SAFETY SYSTEMS PAGES 102-108

CONFINED SPACE SYSTEMS PAGES 109-125

FALL RESCUE PAGES 126-131

GUARDRAIL SYSTEMS PAGE 132

FIREFIGHTER BELTS PAGES 133

CARRY BAGS PAGE 134



76-85



94-101



102-108



109-125



## Class 1 & Class 2 Self-Retracting Lifelines (pages 76-85)

We are thrilled to announce the addition of Class 1 and Class 2 Self-Retracting Lifelines to our product lineup. This expansion means enhanced safety and versatility for your fall protection needs.

Class 1 and Class 2 self-retracting lifelines represent a significant advancement in safety equipment, offering reliable fall protection solutions for a variety of applications. These lifelines are designed to automatically adjust the length of the lifeline based on the user's movements, providing freedom of movement while maintaining optimal safety.



## Additional Davit Bases Portable Davit System (pages 110-123)

Our showcased bases are meticulously engineered to meet the distinctive requirements of confined space work, delivering a stable and secure platform for your Portable Davit System. Whether navigating tight spaces in industrial settings, utility maintenance, or rescue scenarios, our bases guarantee the reliability you seek.

Crafted with precision and adherence to industry standards, our bases facilitate easy setup and deployment, offering an invaluable asset in your safety toolkit. In addition to our full line of bases, this catalog introduces the Trenchbox Mount Davit Base, expanding your options for versatile and secure mounting solutions.



# THE INDUSTRIES WE SERVE

## CONSTRUCTION




The construction industry plays a significant role in the U.S. economy, employing over 7 million individuals and contributing to the creation of structures worth nearly \$1.4 trillion annually. Unfortunately, falls remain the primary cause of fatalities in this sector. Employers are obligated to supply their workers with appropriate fall protection gear and offer them comprehensive training on its proper usage. The removal of fall hazards from elevated work platforms, raised workstations, and openings in floors and walls is essential for ensuring a secure construction site.

## MUNICIPAL WASTEWATER



Not every fall hazard has to be at 300 feet in the air. Local workers servicing a public drainage system or wastewater treatment plant require specific fall protection systems for entering manholes, tanks, and other confined spaces. According to the U.S. Bureau of Labor Statistics from 2011-2018, 1,030 workers died of injuries involving a confined space. It is vital that workers are trained in rescue for these dangerous applications.

## STEEL ERECTION



The cities of America were built by the early pioneers of steel erection. We have all seen the photos of men leisurely enjoying lunch on a steel I-beam hundreds of stories above the New York City skyline. Thankfully, long-gone are the days of walking untethered above the world's tallest buildings. However, fall protection hazards still exist in this extreme profession. According to the U.S. Bureau of Labor Statistics Ironworkers have the fifth highest fatality rate (33.4 per 100,000 workers) of any United States civilian worker classification.

## TOWER CLIMBING WIND ENERGY



As technology advances into the modern area so does the need for skilled workers to climb new cellphone/communication towers, and wind turbines. Among the industries where workers are falling to their death, tower climbers have experienced fatality rates up to 10 times higher than construction workers. In recent years, new ladder safety devices have been implemented and regulated by OSHA to keep workers safe while climbing a fixed ladder.



# GET BACK TO THE BASICS

## A ANCHORAGE

The anchorage is the secure point of the attachment for the fall-arrest system. The appropriate type of anchor varies by industry needs and the application. Anchors may be temporary or permanent.



A 1702 Steel I-Beam Anchor

## B BODY SUPPORT

Full body harnesses provide a connection point to the fall arrest system. Harnesses are designed to protect workers in the event of a fall by evenly distributing fall arrest forces over your upper thighs, pelvis, chest and shoulders.



B 22850BH-ALT Stratos Full Body Harness

## C CONNECTING DEVICE


Ties your full body harness to the anchorage point. Commonly used connecting devices include shock absorbing lanyards and self-retracting devices (SRD's).



C M2RG-4Z Rogue Self-Retracting Lifeline

## D DESCENT/RESCUE

It is imperative to have a rescue plan in place at your jobsite in the event of a fall. These devices are used to raise or lower a fallen worker to safety. The tools and training for safe rescue are the last, but most important step in fall protection.

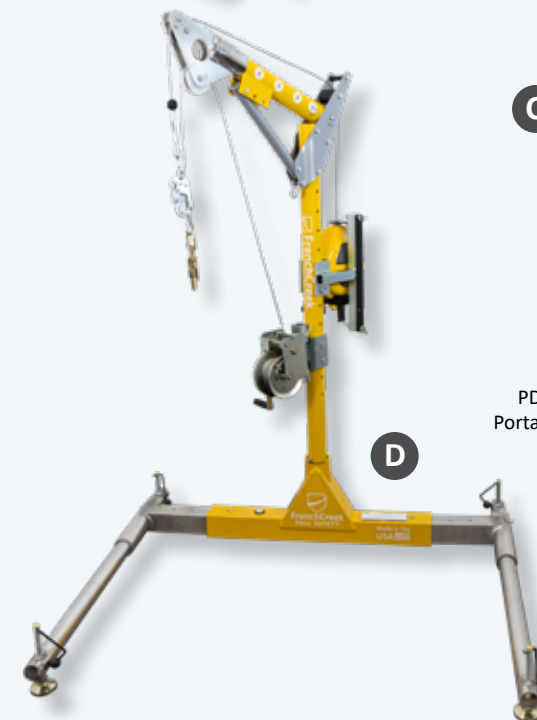

D PD1-4 Complete Portable Davit System





Don't get stuck...  
**ON THE BOAT!**

Fun fact:  
American Made products don't get stuck on cargo ships...

# READY TO SHIP

STOCK PRODUCTS FROM FRENCHCREEK



Model #	Pg#	Model #	Pg#	Model #	Pg#	Model #	Pg#
Anchorage Connectors		Confined Space Systems		Ropes & Roofing Safety		Self-Retracting Lifelines	
1336-WP tie-off adapter	67	PD1 davit mast assembly	110	RKB-1715-50 roof. kit	87	459 8' web SRL	85
1348-WP tie-off adapter	67	PD2 davit portable base	110	410-25 rope lifeline	88	RG3-13-0Z 13' web SRL	77
1372-WP tie-off adapter	67	PD3 mounting bracket	110	410-50 rope lifeline	88	MRG3-0Z 13' web SRL	78
1372 tie-off adapter	67	PD4 mounting bracket	110	410-100 rope lifeline	88	M2RG-4Z 8' web SRL	79
1324 tie-off adapter	67	PD5 core mount base	112	411-25 rope lifeline	88	M2RG-0Z 8' web SRL	79
1336 tie-off adapter	67	PD6 cast-in-place base	114	411-50 rope lifeline	88	XR-7W 7' web SRL	81
1348 tie-off adapter	67	PD7 floor mount base	116	411-100 rope lifeline	88	XR-11G 11' cable SRL	81
1124 tie-off adapter	67	PD8 wall mount base	118	1201N rope grab	90	XR-30G 30' cable SRL	81
1136 tie-off adapter	67	PD9 barrel-mount base	120	1202AN-3 rope grab	90	XR-50LEG 50' LE SRL	83
1600VC tie-off adapter	68	PD10 hitch-mount base	122	1201 rope grab	91	XR-30LEG 30' LE SRL	83
1701 anchor plate	68	S50G-7 tripod system	124	1261 rope grab	91	XR-20LEG 20' LE SRL	83
1769 girder anchor	69	R50G-TP7 tripod system	124	411-50MG grab & lifeline	91	RL25AGZ 25' cable SRL	84
1789 parapet anchor	73	S50G-M7 tripod system	124	1401-38 wire rope grab	91	RL50GZ 50' cable SRL	85
1785 door jamb anchor	73	R50G rescue SRL	125	MRA-R1 roof anchor	92	354-MR SRL connector	79
RTO-12 tie-off pole	74	MW50G material winch	125	1715 roof anchor	92	Ladder Safety Systems	
1503 wire hook anchor	75	TP7 tripod	125	1720 roof anchor	92	1401A-38 cable grab	105
MRA-R1 roof anchor	92	TP9 tripod	125	1730 roof anchor	92	2-1200A-AT trolley	106
1715 roof anchor	92	Full Body Harnesses		1740 roof anchor	92	2-1224A-AT trolley	106
1720 roof anchor	92	550 harness	30	Safety Lanyards		5-1501 removable extn.	107
1730 roof anchor	92	631 harness	32	440AZ dual-leg lanyard	46	5-1502B removable extn.	107
1740 roof anchor	92	631B harness	32	440AS dual-leg lanyard	48	AP36 ladder anchor post	108
Bags & Misc.		631LJ life jacket harness	35	444A dual-leg lanyard	46	4-1000 ladder guard	108
204 carry bag	134	650-U harness	31	444ASZ dual-leg lanyard	48		
206 tripod carry bag	134	651 harness	33	450A single leg lanyard	46		
206-9 tripod carry bag	134	651B harness	33	454A single leg lanyard	48		
208Z carry bag	134	850AB harness	23	450B adjustable lanyard	55		
U-STEP trauma straps	42	850B-TS harness	27	450AB adjustable lanyard	47		
TL3 tool lanyard	43	22650B Stratos harness	14	450AS single leg lanyard	48		
WL-10 flexible ladder	128	22850B Stratos harness	13	460A single leg lanyard	51		
1418 D-ring extension	43	22850BH-ALT harness	17	460AS single leg lanyard	52		
1418-LOOP D-ring extension	128	Guardrail Systems		490A single leg lanyard	54		
Bosun Chairs/Work Seats		GR200 guardrail system	132	324-C rebar assembly	56		
4151 deluxe work seat	40			324-CSZ rebar assembly	56		
4154 work seat	40						

These items ship same or next day. All Quickship items are designated with a "Q" symbol.







# FULL BODY HARNESSSES



Shown:  
22850B STRATOS Full Body Harness

## Harness Customization Options

### FrenchCreek Webbing

FrenchCreek harnesses are constructed out of nylon, polyester, and other high-performance synthetic webbing, and are rated from 130-310 lbs. per ANSI and up to 400 lbs. per OSHA requirements.

- ✔ Several color options available
- ✔ Flame & heat resistant Kevlar webbing available pages 36-39



## Leg Strap Options

### Connecting Buckle Options

Choose the style of leg buckle that you prefer.

**Available options include:**

- ✔ Pass-Thru buckles
- ✔ Tongue buckle/grommet
- ✔ Bayonet buckles

Pass-Thru Buckle



Bayonet Buckle



Tongue Buckle/Grommet






**Harness Customization Options**

**Your Harness, Your Way**

At FrenchCreek, we understand that not all job sites are the same. So why should you settle for equipment that doesn't fully meet your job requirements? Sometimes straight off the shelf doesn't cut it. Our industry experts will work with you to provide you with a product that can tackle the toughest job sites.



**Option 9**  
D-Ring Extension

**400R**  
Lanyard Retaining Rings

**Option B**  
Hip-Positioning D-rings

**800PS**  
Removable Suspension Saddle

**Option W**  
Waist-Positioning D-ring



**Option D**  
Shoulder-Positioning D-rings

**101R**  
Removable/Reusable Lanyard Retainer

**Option H**  
Chest-Positioning D-ring

**Webbing Colors**  
Several Color Options Available

**Leg Buckle Options**  
Choose from:  
Bayonet, Tongue & Grommet, Pass-Thru


Scan to view more  
harness options





Sizing Chart (STRATOS Series Harnesses ONLY)

Choosing the right size harness is a very important safety factor for fall protection. It's not like just choosing the right size T-shirt; just because you wear a XL T-shirt doesn't necessarily mean you wear an XL harness. See the sizing chart below for the appropriate fit for FrenchCreek STRATOS harnesses:

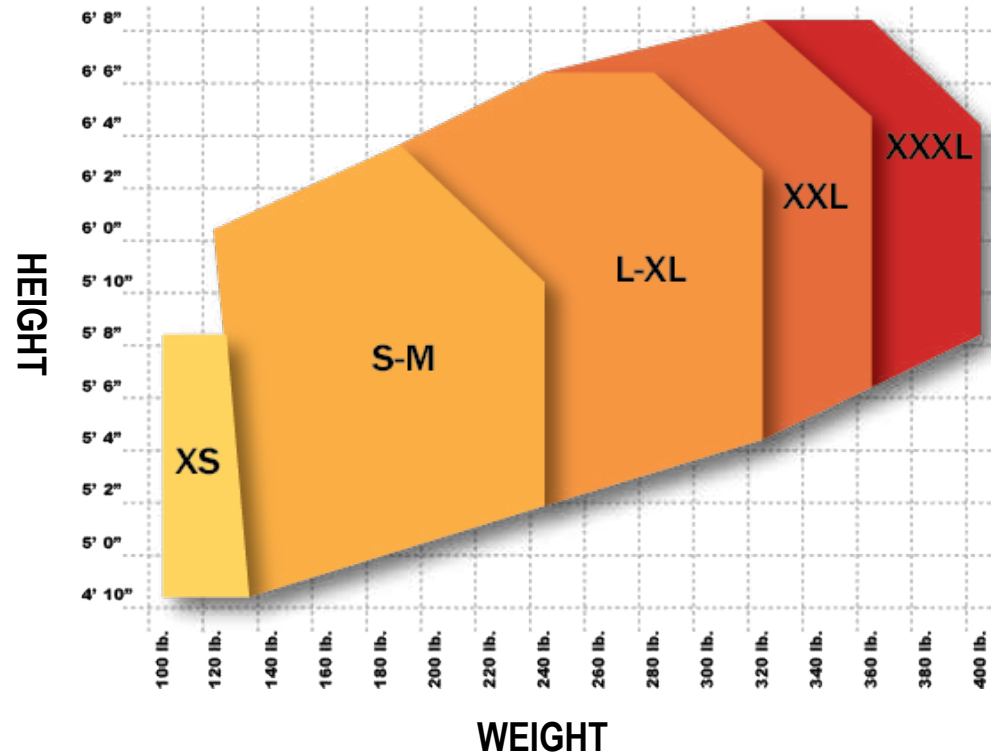

STEP 1

Visually inspect the harness

STEP 2

Disconnect any buckles

STEP 3

Slip on the harness like a jacket

STEP 4

Adjust & buckle the waist belt

STEP 5

Buckle & adjust the leg straps

STEP 6

Adjust the shoulder/torso straps

STEP 7

Buckle & adjust the chest strap

STRATOS SERIES

Full Body Harnesses (2200 Series)

The innovative STRATOS Series full body harness exceeds expectations at the highest level. Designed with safety, durability, and maximum comfort, the FrenchCreek STRATOS Series hits the mark.

- ✔ Air-mesh comfort shoulder, back, and leg pads
- ✔ Adjustable floating chest strap
- ✔ Break-away lanyard parking retainer
- ✔ Bayonet buckle chest straps
- ✔ Most options, accessories & color choices available
- ✔ Available in sizes XS, S-M, L-XL, 2XL, 3XL



**22850B**  
6-point adjustment with comfort waist pad  
Hip positioning D-rings  
Tongue buckle/grommet leg adjustments





**22650**  
5-point adjustment  
Tongue buckle/grommet legs



**22670**  
5-point adjustment  
Bayonet leg buckles



**226509B**  
5-point adjustment  
Hip positioning D-rings  
D-ring extension  
Tongue buckle/grommet legs



**22670B**  
5-point adjustment  
Hip positioning D-rings  
Bayonet leg buckles

**22650B**  
*Q L-XL size quickship only*  
5-point adjustment  
Hip positioning D-rings  
(No D-ring extension)  
Tongue buckle/grommet legs



**22850**  
6-point adjustment with waist pad  
Tongue buckle/grommet legs



**22870**  
6-point adjustment with waist pad  
Bayonet leg buckles



**22850B**  
*Q* 6-point adjustment  
Hip positioning D-rings  
Comfort waist pad  
Tongue buckle/grommet legs



**22870B**  
6-point adjustment  
Hip positioning D-rings  
Bayonet leg buckles





**22950**  
4-point adjustment cross-over style  
Tongue buckle/grommet legs



**22950B**  
4-point adjustment cross-over style  
Hip positioning D-rings  
Tongue buckle/grommet legs



**22970**  
4-point adjustment cross-over style  
Bayonet leg buckles



**22970B**  
4-point adjustment cross-over style  
Hip positioning D-rings  
Bayonet leg buckles

**STRATOS SERIES**

**Full Body Tower Climbing Harness**

FrenchCreek has designed one of the most lightweight and comfortable tower climbing harnesses in the industry. The air mesh padding combined with the suspension saddle makes the STRATOS tower climbing harness the work horse of the industry.

- ✔ 6-point adjustment with waist pad
- ✔ Hip-positioning D-rings
- ✔ Sternum D-rings
- ✔ Suspension saddle with D-rings and aluminum workseat
- ✔ Most options, accessories & color choices available



**Ordering Options**

**22850BH-ALT**  
STRATOS tower climbing harness with tongue buckle/grommet legs

**22870BH-ALT**  
STRATOS tower climbing harness with bayonet leg buckles



STRATOS SERIES

Full Body Oil Derrick Harness

FrenchCreek has designed this version of the STRATOS Series harness to meet the specific demands of the oil industry. Excellent for fall protection and positioning, this harness features an oil derrick pad waist belt, and suspension saddle for climbing the rig.

- ✔ Air-mesh comfort shoulder, back, and leg pads
- ✔ Adjustable floating chest strap
- ✔ Break-away lanyard parking retainer
- ✔ Bayonet buckle chest straps
- ✔ Most options, accessories & color choices available
- ✔ Available in sizes XS, S-M, L-XL, 2XL, 3XL



Ordering Options

**228509BT-OD**  
STRATOS oil derrick harness with tongue buckle/grommet legs

**228709BT-OD**  
STRATOS oil derrick harness with bayonet leg buckles

STRATOS SERIES

Maximum Comfort Full Body Harness

The 22850B-HD version of the STRATOS full body harness provides maximum comfort for all day use. The air-mesh lumbar pad has been doubled in thickness to provide maximum support and comfort. Additional gear loops have been added to the back of the harness for easier tool carrying at work-sites.

- ✔ Air-mesh comfort shoulder, back, and leg pads
- ✔ Adjustable floating chest strap
- ✔ Break-away lanyard parking retainer
- ✔ Bayonet buckle chest straps
- ✔ Most options, accessories & color choices available



Additional equipment/gear loops



Additional comfort padding



**22850B-HD**  
6-point adjustment with extra-thick comfort waist pad  
Hip-positioning D-rings  
Tongue buckle/grommet legs  
Additional equipment/gear loops



STRATOS SERIES LANYARDS

Full Body Harnesses (2200 Series)

All STRATOS lanyards come in 6’ lengths with black webbing, and meet the performance requirements of ANSI Z359. Other lengths and snaphook combinations are available. FrenchCreek lanyards are constructed from nylon and polyester webbing and are rated from 130-310 lbs. per ANSI and up to 400 lbs. per OSHA requirements.



22450A

6’ pack style shock absorbing lanyard  
1” wide webbing  
Z74 locking snaphooks each end



22450AS

6’ pack style shock absorbing lanyard  
1 3/8” wide tubular webbing  
Relaxed length of 4 1/2’  
Z74 locking snaphooks each end



22440AS

6’ 100% tie-off pack style shock absorbing lanyard  
1 3/8” wide tubular webbing  
Relaxed length of 4 1/2’  
Z74 locking snaphooks each end



22420A

6’ 100% tie-off shock absorbing lanyard  
1 3/8” wide tubular webbing  
Z74 locking snaphooks each end



22420AS

6’ 100% tie-off tubular style shock absorbing lanyard  
2” wide tubular webbing  
Relaxed length of 4 1/2’  
Z74 locking snaphooks each end

NAVIGATOR

22030B

Navigator Full Body Harness

Constructed of 1-3/4” wide webbing and air-mesh padding, the Navigator offers maximum comfort for all day use. The capabilities for the Navigator are nearly endless, with several D-ring connections and “pick-points” perfect for high angle rescue, tower climbing, and other tactical applications.

- ✔ Wide waist belt & lumbar pad
- ✔ Comfort air-mesh padding on shoulders, back & legs
- ✔ Front sternum attachment point, perfect for rescue
- ✔ Several equipment/gear loops & attachment points
- ✔ Most options, accessories, & color choices available
- ✔ Available in sizes: XS, S-M, L-XL, XXL



Ordering Options

22030B-BLK

Standard Navigator harness with fixed leg buckles


22070B-BLK

Standard Navigator harness with bayonet leg buckles



Sizing Chart (500, 600, 800 & 900 series harness)

Choosing the right size harness is a very important safety factor for fall protection. It's not like just choosing the right size T-shirt; just because you wear a XL T-shirt doesn't necessarily mean you wear an XL harness. See the sizing chart below for the appropriate fit for FrenchCreek harnesses:

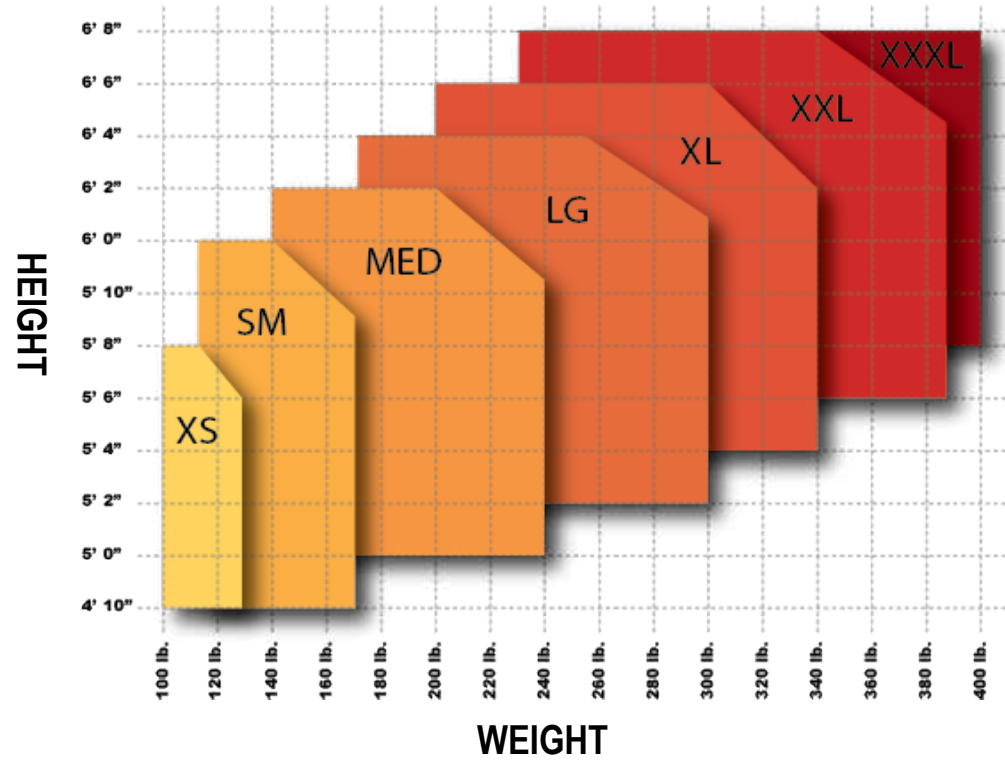

STEP 1

Visually inspect the harness

STEP 2

Disconnect any buckles

STEP 3

Slip on the harness like a jacket

STEP 4

Adjust & buckle the waist belt

STEP 5

Buckle & adjust the leg straps

STEP 6

Adjust the shoulder/torso straps

STEP 7

Buckle & adjust the chest strap

800 Series Full Body Harnesses

The 800 series harnesses are extremely durable and comfortable. With a range that is extensive with a suitable model for everyone and every job, the 800 series is a long-time favorite in the construction industry and many others.

- Adjustable shoulder, chest, waist and leg straps
- Sliding back D-ring
- 6" wide comfort waist pad w/removable heavy duty tool belt
- Lightweight, high strength synthetic webbing
- Available in sizes: XS, S, M, L, XL, 2XL, 3XL



**850AB**  
6-point adjustment  
Shoulder pads  
Hip-positioning D-rings  
Tongue buckle/grommet legs



**850**  
6-point adjustment  
Tongue buckle/grommet legs



**850A**  
6-point adjustment  
Shoulder pads  
Tongue buckle/grommet legs



**850B**  
6-point adjustment  
Hip-positioning D-rings  
Tongue buckle/grommet legs





**870**  
6-point adjustment  
Bayonet leg buckles



**870A**  
6-point adjustment  
Shoulder pads  
Bayonet leg buckles



**833**  
6-point adjustment  
Sub-pelvic strap  
Pass-thru leg buckles



**853**  
6-point adjustment  
Sub-pelvic strap  
Tongue buckle/grommet legs



**853A**  
6-point adjustment  
Sub-pelvic strap  
Shoulder Pads  
Tongue buckle/grommet legs



**870AB**  
6 point adjustment  
Shoulder pads  
Hip-positioning D-rings  
Bayonet leg buckles



**870BP**  
6-point adjustment  
Hip-positioning D-rings  
Removable back pad  
Bayonet chest buckle  
Bayonet leg buckles



**853B**  
6 point adjustment  
Sub-pelvic strap  
Hip-positioning D-rings  
Tongue buckle/grommet legs



**853AB**  
6-point adjustment  
Sub-pelvic strap  
Hip-positioning D-rings  
Shoulder pads  
Tongue buckle/grommet legs



872 Series  
Women’s Full Body Harness

The FrenchCreek full body harness for women is designed with form-fitting comfort; utilizing the combination of lightweight, synthetic, high-strength certified webbing.

Available in sizes: XS, S, M, L, XL, 2XL, 3XL



**872B**  
6-point adjustment  
Female fit leg straps  
Hip positioning D-rings  
Bayonet chest buckle  
Bayonet leg buckles



**872AB**  
6-point adjustment  
Female fit leg straps  
Hip positioning D-rings  
Shoulder pads  
Bayonet chest buckle  
Bayonet leg buckles




**872**  
6-point adjustment  
Female fit leg straps  
Bayonet chest buckle  
Bayonet leg buckles

800 Series  
Tower Climbing Harnesses


FrenchCreek tower climbing harnesses are designed to meet the specific safety and functional needs for climbing towers.

Available in sizes: XS, S, M, L, XL, 2XL, 3XL

**850ABTH**  
6-point adjustment  
Sternum D-ring  
Accessory rings  
Suspension saddle with D-rings  
Hip-positioning D-rings  
Tongue buckle/grommet legs

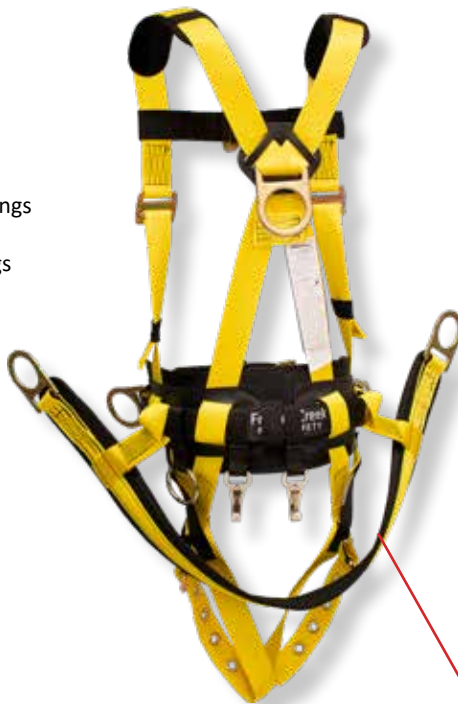

**850B-TS**  
6-point adjustment  
Waist D-ring for vertical climbing systems  
Hip-positioning D-rings  
Tongue buckle/grommet legs

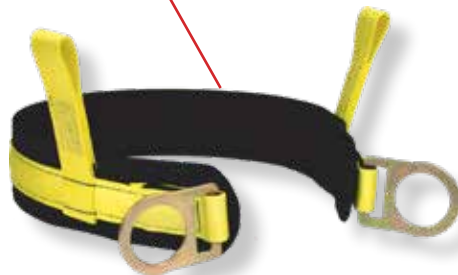

**800PS**  
Removable saddle for comfort  
Positioning and suspension applications  
Must be used in conjunction with a full body harness  
Can be integrated into any 800 series belt/pad





**887PBT**  
6-point adjustment  
Adjustable sternum D-ring  
Back pad  
Accessory rings  
Fixed rigid suspension saddle  
Hip-positioning D-rings  
Tongue buckle/grommet legs



**897ABT**  
6-point adjustment  
Adjustable sternum D-ring  
Back pad  
Accessory rings  
Removable suspension saddle  
Hip-positioning D-rings  
Tongue buckle/grommet legs

**800 Series**  
Full Body Oil Derrick Harness

FrenchCreek's 800 series oil derrick harnesses are perfect for workers who operate on the monkey board. Built for extreme comfort and convenience, this harness is built for prolonged shifts where practical fall protection is needed.

- ✔ 6" comfort waist belt
- ✔ Hip-positioning D-rings
- ✔ Removable 8" wide belly pad
- ✔ Seat sling with positioning D-rings
- ✔ Back positioning waist D-rings
- ✔ Most options, accessories, & color choices available
- ✔ Available in sizes XS, S, M, L, XL, 2XL, 3XL



**8D1509ABT**  
800 series oil derrick harness  
Tongue buckle/grommet legs





500 Series  
Full Body Harnesses

The 500 series is a favorite for maintenance and light construction. Standard features include:

- ✔ Adjustable shoulder, chest, waist, and leg straps
- ✔ Integral 1-3/4" waist belt
- ✔ Sliding back D-ring
- ✔ Lightweight high strength synthetic webbing
- ✔ Available in sizes XS, S, M, L, XL, 2XL, 3XL

Q 550  
6-point adjustment  
Tongue buckle/grommet legs



600 Series  
Full Body Harnesses

The 600 series harnesses incorporate a lightweight design that will give your workers the freedom of movement when working at any height. Standard features include:

- ✔ Adjustable shoulder, chest and leg straps
- ✔ Sub-pelvic strap
- ✔ Sliding back D-ring
- ✔ Lightweight, high-strength synthetic webbing
- ✔ Available in sizes XS, S, M, L, XL, 2XL, 3XL

Q 650-U  
5-point adjustment  
Sub-pelvic strap  
Tongue buckle/grommet legs  
One universal size



530  
6-point adjustment  
Pass-thru leg buckles



550B  
6-point adjustment  
Hip-positioning D-rings  
Tongue buckle/grommet legs



570  
6-point adjustment  
Bayonet leg buckles  
Bayonet chest buckle



650B  
5-point adjustment  
Hip-positioning D-rings  
Tongue buckle/grommet legs  
Sub-pelvic strap



630  
5-point adjustment  
Pass-thru leg buckles  
Sub-pelvic strap



630B  
5-point adjustment  
Hip-positioning D-rings  
Pass-thru leg buckles  
Sub-pelvic strap



601 Series  
Full Body Harnesses (lightweight series)

The 601 series harnesses are lightweight, versatile, and easy to use. A great overall choice for general construction or roofing. Standard features include:

- ✔ 3-point adjustment (chest and leg straps)
- ✔ Sliding back D-ring
- ✔ Lightweight, high strength synthetic webbing
- ✔ TWO UNIVERSAL SIZES ONLY (S-M and M-XL)

Q 631  
3-point adjustment  
Pass-thru leg buckles



Q 651  
3-point adjustment  
Tongue buckle/grommet legs



Q 651B  
3-point adjustment  
Hip positioning D-rings  
Tongue buckle/grommet legs  
Quickship M-XL only



Q 631B  
3-point adjustment  
Hip-positioning D-rings  
Pass-thru leg buckles



631D  
3-point adjustment  
Shoulder D-rings  
Pass-thru leg buckles



651D  
3-point adjustment  
Tongue buckle/grommet legs  
Shoulder D-rings



671  
3-point adjustment  
Bayonet chest buckle  
Bayonet leg buckles





900 Series  
Full Body Harnesses (cross-over style)

The 900 series can be used in a multitude of applications. The harness is donned by a step-thru procedure that is quick and easy. Standard features include:

- ✔ Front cross-over style
- ✔ Adjustable shoulder and leg straps
- ✔ Chest D-ring for positioning, suspension and rescue
- ✔ Lightweight, high strength synthetic webbing
- ✔ Sternal D-ring
- ✔ Available in sizes XS, S, M, L, XL, 2XL, 3XL

930  
4-point adjustment cross-over style  
Pass-thru leg buckles



930B  
4-point adjustment cross-over style  
Hip-positioning D-rings  
Pass-thru leg buckles



950  
4-point adjustment cross-over style  
Tongue buckle/grommet legs



950B  
4-point adjustment cross-over style  
Hip-positioning D-rings  
Tongue buckle/grommet legs


Specialty  
Full Body Harnesses

In many situations a specialty harness may be necessary for ensured safety. These harnesses meet the specific industry requirements and help workers in these fields work safely.

*The coefficient of retro-reflection for the 552 and the 631LJ harnesses have an initial value of 700 and a minimum value of 330 per ANSI/ISEA 107-2015*

Available in sizes: XS, S, M, L, XL, 2XL, 3XL

552  
5-point adjustable harness  
Miner's harness with lamp and battery straps  
Dual lanyard retaining rings each shoulder  
Radio loops  
Tongue buckle/grommet legs  
152" of reflective material



Reflective Material



Reflective Material

Q 631LJ  
3-point adjustable harness  
Pass-thru leg straps  
Built in life jacket **Type 3 PFD**  
Life jacket comes in universal size: S-XXL



Arc Flash  
Full Body Harnesses

FrenchCreek’s arc flash harnesses offer fall protection, protecting workers from falls caused by electric arc-blast exposure. These harnesses are made from heat & flame resistant webbing.

Flame resistant fabric has an arc rating of 8.6 CAL/CM² per ASTM 1959 and is ASTM F1506 compliant with an NFPA 70E rating of category 2.

**AF630KDE**  
Kevlar® webbing  
Dielectric hardware(chest, shoulder, leg)  
Dielectric back D-Ring  
Flame resistant label cover  
Available in sizes: XS, S, M, L, XL, 2XL, 3XL  
  
Harness Meets:  
ASTM F887-13  
ANSI Z359.1-2007  
OSHA 1910.269 & 1926.54



**631KUT**  
Kevlar® webbing  
Dielectric back D-Ring  
Flame resistant buckle covers  
Available in sizes: S-M,M-XL



**630UT**  
Utility harness, no metal above the waist  
Buckle insulators  
Sliding back web loop  
Available in sizes: XS, S, M, L, XL, 2XL, 3XL




**AF390AKZ**  
6’ Kevlar® shock absorbing lanyard  
Flame resistant shock-pack & label cover  
Harness choke loop  
#Z74 (3/4” opening) locking snaphook  
Lanyards Meets:  
  
ASTM F887-13  
ANSI Z359.1-2007  
OSHA 1910.269 & 1926.54



**AF390AKDLZ**  
6’ Kevlar® Dual-leg shock absorbing lanyard  
Flame resistant shock-pack & label cover  
Harness choke loop  
#Z74 (3/4” opening) locking snaphooks  
Lanyards Meets:  
  
ASTM F887-13  
ANSI Z359.1-2007  
OSHA 1910.269 & 1926.54



**347AS-135A**  
6’ Dual-leg elastic shock absorbing lanyard  
#135A (2 1/2” gate opening) aluminum snaphooks  
Harness choke loop

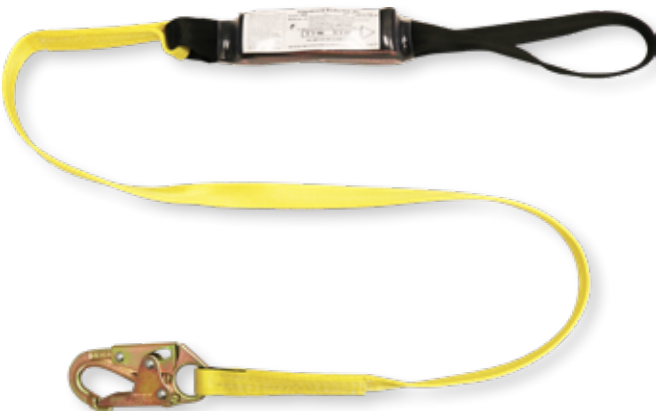

**355A**  
6’ shock absorbing lanyard  
#Z74 (3/4” opening) snaphook  
Harness choke loop



Welding  
Full Body Harnesses & Accessories

FrenchCreek manufactures these harnesses out of high-strength Kevlar webbing that meets the heat and flame resistance requirements that occur in harsh environments.

Flame resistant fabric has an arc rating of 8.6 CAL/CM² per ASTM 1959 and is ASTM F1506 compliant with an NFPA 70E rating of category 2.

**530-HOT**  
6 point adjustment with waist pad  
Kevlar® webbing  
Pass-thru leg buckles  
Available in sizes: XS, S, M, L, XL, 2XL, 3XL



**400BC**  
Flame resistant buckle covers  
Installs with velcro closure



**RL32V**  
32' composite-coated wire rope SRL (composite coated wire rope helps to eliminate arc from welding)  
#RL-28 (3/4" opening) locking swivel snap  
#354-4 (1" opening) carabiner for anchoring  
Class "1" SRL




**631-HOT**  
3 point adjustment  
Kevlar® webbing  
Pass-thru leg buckles  
Available in sizes: S-M, M-XL



**631B-HOT**  
3-point adjustment  
Kevlar® webbing  
Hip positioning D-rings  
Pass-thru leg buckles  
Available in sizes: S-M, M-XL



**400SC-FR**  
Flame resistant strap covers  
Covers chest and shoulder straps  
Fits most harnesses

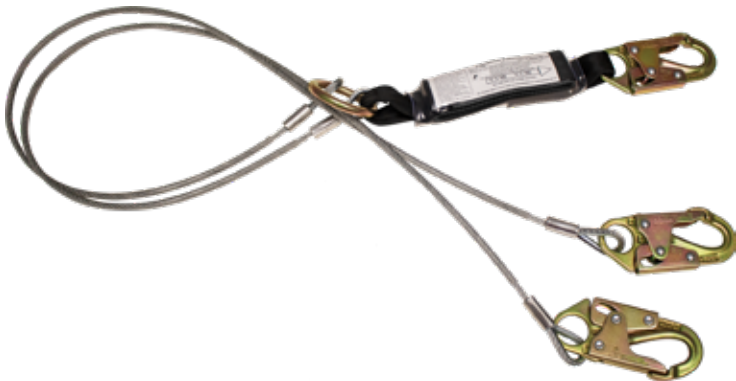

**480AK**  
Vinyl coated wire rope shock absorbing lanyard  
Kevlar® web shock-pack  
#Z74 locking snaphooks on each end  
Pack style shock absorber



**490AK**  
Kevlar® web shock absorbing lanyard  
#Z74 (3/4" opening) locking snaphooks on each end  
Pack style shock absorber



4000 Series  
Bosun's Chairs & Workseats

FrenchCreek manufactures a wide variety of exceptionally comfortable work seats and Bosun's chairs that are useful for inspection work, window washing, painting and maintenance. Seats manufactured out of 3/4" rigid board.



**Q 4154**  
12" x 24" Work Seat  
Built-in universal size harness  
Spreader bar and yoke



**Q 4151**  
21" x 16" Deluxe Work Seat  
Built-in universal size harness  
Spreader bar and yoke



**4153**  
21" x 16" Deluxe Work Seat  
Does not include harness



**4754**  
12" x 24" Work Seat  
Built-in universal size harness  
Tongue buckle/grommet legs  
Removable waist belt

VIZ  
Hi-Visibility Fall Protection Vest

The need to be seen is critical for worker safety, especially for workers who perform tasks on or near moving vehicles or equipment. By wearing high-visibility garments, workers can draw attention to themselves to prevent injuries and fatalities from struck-by hazards in complex work environments, when the ability to be seen at all times is necessary.

- ✔ Durable 100% polyester solid front & ultra cool mesh back
- ✔ Snap front closure
- ✔ 2" wide high performance reflective material on 3" contrasting color
- ✔ Back & side openings for harness D-rings
- ✔ ANSI 107 Type R, Class 2 Compliant



Back opening for harness D-Ring  
Left chest pocket for radio

**VIZ**  
Sold separately as an accessory or added to harness. Example: 650-VIZ



1418 Series  
D-Ring Extension Straps

D-ring extension straps are an accessory to a fall protection harness. The strap is used to extend the back D-ring attachment point.

**Q 1418**  
D-Ring Extension Strap  
Z74 Locking Snaphook  
Connects to Harness D-ring



**Q 1418-LOOP**  
D-Ring Extension Strap  
Choke-loop to Harness D-ring





U-STEP  
Suspension Trauma Relief Straps

The U-STEP is to be used in conjunction with a full body harness and a complete fall prevention/rescue program. It can be attached to most harness sizes, styles and brands. This accessory can stop the deadly effects of suspension trauma.

- ✔ 2 lightweight “packs” easily attach to harness
- ✔ After a fall, the worker can pull out webbing from packs
- ✔ Worker connects the locking clasps to form a loop
- ✔ Worker can stand in the leg loop to relieve trauma

Ⓚ U-STEP  
Pair of suspension trauma straps  
Choked thru harness to attach  
Adjustable



STEP 3.  
Step into web loop with both feet



STEP 4.  
Stand vertical in web loop to relieve harness tension



STEP 1.  
Pull U-Step straps out from the side. (pull firmly so stitch breaks)



STEP 2.  
Adjust to appropriate length and buckle straps together

TL3 Series  
Tool Lanyards  
The sidekick tool lanyard from FrenchCreek eliminates the hazard of dropped objects when working at heights. To use, simply attach your tool with the provided carabiner or constrict the cord to the tool.  
✔ 2' relaxed length, 3'-6' stretch  
✔ Adjustable cinch cord for tool attachment  
✔ Fits tools of various shapes and sizes



Ⓚ TL3  
Single leg tool lanyard



TL3DL  
Dual leg tool lanyard

Fits Wide Variety of Tools!  
15 lb. tool weight limit



STOP  
DROPPING  
TOOLS!







## SAFETY LANYARDS




# CALCULATE FALL CLEARANCE LIKE A PRO

It is vitally important that fall clearance is properly calculated before working at height. Because, guessing is for rookies.

## CALCULATION

When tying off overhead with a shock absorbing lanyard, the required fall clearance distance (FC) is = A + B + C + D.

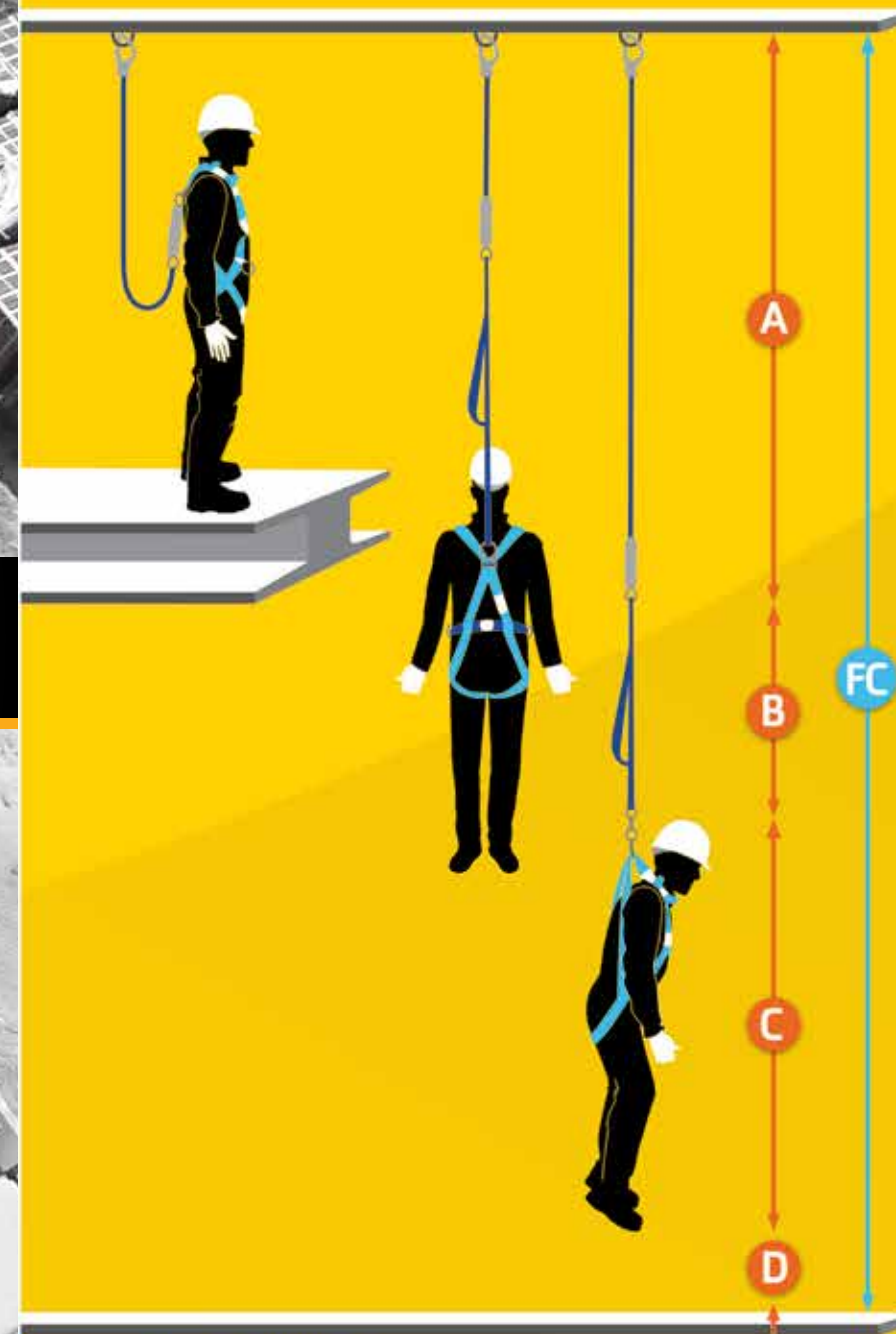

- A** Lanyard length (Example = 6 feet)
- B** Maximum deceleration distance of the lanyard (3.5 feet is the OSHA requirement)
- C** Height of the suspend worker (Typically = 6', factoring in D-ring slide and harness stretch)
- D** Safety factor (3 feet is the industry standard)
- FC** To be safe the distance between your anchor point and the nearest obstruction must be > FC

*Nearest obstruction.*

This page illustrates a common method of calculating fall clearance using a shock absorbing lanyard. Refer to the manufacturer's instructions for complete details for calculating fall clearance to ensure maximum safety on the job-site.



Web Pack-Style Shock Absorbing Lanyard

This web lanyard with pack style shock absorber limits fall arrest forces to 900 lbs. when tested to OSHA & ANSI standards.

- ✔ 1" synthetic lanyard with shock pack
- ✔ Standard length 6', additional lengths available
- ✔ Additional snaphook options available, see pages 60-65



**Q 450A**  
#Z74 locking snaphooks at each end  
Pack style shock absorber



**Q 440AZ**  
Dual-leg 100% tie-off  
#Z74 locking snaphooks at each end  
Pack style shock absorber

Adjustable Web Pack-Style Shock Absorbing Lanyard

This adjustable web lanyard with pack-style shock absorber limits fall arrest forces to 900 lbs. when tested to OSHA & ANSI standards.

- ✔ 1" synthetic webbing with shock pack
- ✔ Adjustable lanyards ordered by longest length
- ✔ Adjust down to approximately half the length
- ✔ Standard length 6', additional lengths available
- ✔ Additional snaphook options available see pages 60-65



**Q 450AB**  
#Z74 locking snaphooks on each end  
Pack style shock absorber  
Adjustable length



**440AB**  
Dual-leg 100% tie-off  
#Z74 locking snaphooks on each end  
Pack style shock absorber  
Adjustable length

Snaphook Options	Lanyard Leg Snaphook Options				
	Z74	62A	69	135A	Z136
Gate	3,600 lb., 3/4"	3,600 lb., 2"	3,600 lb., 1 3/4"	3,600 lb., 2 1/2"	3,600 lb., 2 1/2"
Material	Steel	Aluminum	Steel	Aluminum	Steel
Single-Leg Model #	Q 450A	450A-62A	452A	457A-135A	454A
Dual-Leg Model #	Q 440AZ	440A-62A	442A	447A-135A	Q 444A

Snaphook Options	Lanyard Leg Snaphook Options				
	Z74	62A	69	135A	Z136
Gate	3,600 lb., 3/4"	3,600 lb., 2"	3,600 lb., 1 3/4"	3,600 lb., 2 1/2"	3,600 lb., 2 1/2"
Material	Steel	Aluminum	Steel	Aluminum	Steel
Single-Leg Model #	450AB	450AB-62A	452AB	457AB-135A	454AB
Dual-Leg Model #	440AB	440AB-62A	442AB	447AB-135A	444AB



Elastic Pack-Style Shock Absorbing Lanyard

This tubular-elastic web lanyard with shock absorbing pack limits fall arrest forces to 900 lbs. when tested to OSHA and ANSI standards.

- ✔ 1 3/16" synthetic webbing with shock pack
- ✔ Stretches to minimize tripping and snagging hazards
- ✔ Standard length 6', additional lengths available
- ✔ Standard 6' length relaxes to 4.5' when not stretched
- ✔ Additional snaphook options available, see page 60-65



**Q 450AS**  
#Z74 locking snaphooks at each end  
Pack style shock absorber with elastic stretch



**Q 440AS**  
Dual-leg 100% tie-off  
#Z74 locking snaphooks at each end  
Pack style shock absorber with elastic stretch

Snaphook Options	Lanyard Leg Snaphook Options				
	Z74	62A	69	135A	Z136
Gate	3,600 lb., 3/4"	3,600 lb., 2"	3,600 lb., 1 3/4"	3,600 lb., 2 1/2"	3,600 lb., 2 1/2"
Material	Steel	Aluminum	Steel	Aluminum	Steel
Single-Leg Model #	Q 450AS	450AS-62A	452AS	457AS-135A	Q 454A
Dual-Leg Model #	Q 440AS	440AS-62A	442AS	447AS-135A	Q 444ASZ

Rope Pack-Style Shock Absorbing Lanyard

This polyblend rope lanyard with pack-style shock absorber limits fall arrest forces to 900 lbs. when tested to OSHA & ANSI standards.

- ✔ 1/2" diameter, three-strand polyblend rope
- ✔ Length of 30" and longer are available
- ✔ Additional snaphook options available see pages 60-65



**400A**  
#Z74 locking snaphooks on each end  
Pack style shock absorber



**430A**  
Dual-leg 100% tie-off  
#Z74 locking snaphooks on each end  
Pack style shock absorber

Snaphook Options	Lanyard Leg Snaphook Options				
	Z74	62A	69	135A	Z136
Gate	3,600 lb., 3/4"	3,600 lb., 2"	3,600 lb., 1 3/4"	3,600 lb., 2 1/2"	3,600 lb., 2 1/2"
Material	Steel	Aluminum	Steel	Aluminum	Steel
Single-Leg Model #	400A	400A-62A	402A	407A-135A	404A
Dual-Leg Model #	430A	430A-62A	432A	437A-135A	434A



Wire Rope Pack-Style Shock Absorbing Lanyard

This wire rope lanyard with shock absorbing pack limits fall arrest forces to 900 lbs. when tested to OSHA and ANSI standards.

- ✔ 7/32" vinyl covered wire rope
- ✔ Standard length 6', additional lengths available
- ✔ Additional snaphook options available, see page 60-65



**470A**  
#Z74 locking snaphooks at each end  
Pack style shock absorber



**480A**  
Dual-leg 100% tie-off  
#Z74 locking snaphooks at each end  
Pack style shock absorber

Tubular Shock Absorbing Lanyard

This synthetic web lanyard with shock-absorbing core limits fall arrest forces to 900 lbs. when tested to OSHA & ANSI standards.

- ✔ 1-3/16" tubular synthetic webbing
- ✔ Standard length 6', additional length available
- ✔ Additional snaphook options available see pages 60-65



**460A**  
#Z74 locking snaphooks on each end  
Internal shock absorbing core



**420A**  
Dual-leg 100% tie-off  
#Z74 locking snaphooks on each end  
Internal shock absorbing core

Snaphook Options	Lanyard Leg Snaphook Options				
	Z74	62A	69	135A	Z136
Gate	3,600 lb., 3/4"	3,600 lb., 2"	3,600 lb., 1 3/4"	3,600 lb., 2 1/2"	3,600 lb., 2 1/2"
Material	Steel	Aluminum	Steel	Aluminum	Steel
Single-Leg Model #	470A	470A-62A	472A	477A-135A	474A
Dual-Leg Model #	480A	480A-62A	482A	487A-135A	484A


Snaphook Options	Lanyard Leg Snaphook Options				
	Z74	62A	69	135A	Z136
Gate	3,600 lb., 3/4"	3,600 lb., 2"	3,600 lb., 1 3/4"	3,600 lb., 2 1/2"	3,600 lb., 2 1/2"
Material	Steel	Aluminum	Steel	Aluminum	Steel
Single-Leg Model #	460A	460A-62A	462A	467A-135A	464A
Dual-Leg Model #	420A	420A-62A	422A	427A-135A	424A



Elastic Tubular  
Shock Absorbing Lanyard

This tubular-elastic web lanyard with internal shock absorbing core limits fall arrest forces to 900 lbs. when tested to OSHA and ANSI standards.

- ✔ 2" tubular synthetic webbing
- ✔ Stretches to minimize tripping and snagging hazards
- ✔ Standard length 6' length only
- ✔ Standard 6' length relaxes to 4.5' when not stretched
- ✔ Additional snaphook options available, see pages 60-65

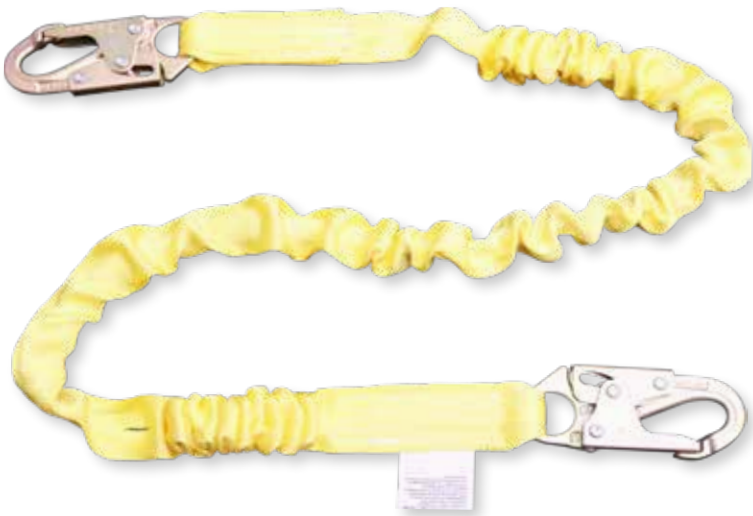

**Q 460AS**  
#Z74 locking snaphooks at each end  
Internal shock absorbing core



**420AS**  
Dual-leg 100% tie-off  
#Z74 locking snaphooks at each end  
Internal shock absorbing core

Snaphook Options	Lanyard Leg Snaphook Options				
	Z74	62A	69	135A	Z136
Gate	3,600 lb., 3/4"	3,600 lb., 2"	3,600 lb., 1 3/4"	3,600 lb., 2 1/2"	3,600 lb., 2 1/2"
Material	Steel	Aluminum	Steel	Aluminum	Steel
Single-Leg Model #	Q 460AS	460AS-62A	462AS	467AS-135A	464AS
Dual-Leg Model #	420AS	420AS-62A	422AS	427AS-135A	Q 424AS

Tie-Back Lanyards  
Shock Absorbing Lanyard

The tie-back web lanyards with shock absorbing pack can be used as a tie-back anchor and limits fall arrest forces to 900 lbs. when tested to OSHA and ANSI standards.

- ✔ 1 3/8" tubular synthetic webbing
- ✔ Standard length 6', additional lengths available
- ✔ Color coded wear indicator
- ✔ Additional snaphook options available see pages 60-65



**456AW**  
#Z74 locking snaphook one end  
#63 (3/4" opening) auto locking snaphooks other ends  
Pack style shock absorber



**456AW-EXT**  
#Z74 locking snaphook one end  
#63 (3/4" opening) auto locking snaphook other end  
Pack style shock absorber  
D-Ring for additional connections



**446AW**  
Dual leg (100% tie off)  
#Z74 locking snaphook one end  
#63 (3/4" opening) auto locking snaphook other end  
Pack style shock absorber



Web Pack-Style Single Leg Shock Absorbing Lanyard

This web lanyard with pack style shock absorber limits fall arrest forces to 900 lbs. when tested to OSHA & ANSI standards.

- ✔ Heavy duty 1 3/4" synthetic webbing
- ✔ Standard length 6', additional lengths available
- ✔ Additional snaphook options available, see pages 60-65



**Q 490A**  
Heavy duty 1 3/4" synthetic webbing  
#Z74 locking snaphooks each end  
Pack style shock absorbing



**494A**  
Heavy duty 1 3/4" synthetic webbing  
#Z74 locking snaphook at one end  
#Z136 rebar snaphook (2 1/2" opening other end)  
Pack style shock absorbing



**490A-DL**  
Dual-leg 100% tie-off  
Heavy duty 1 3/4" synthetic webbing  
#Z74 locking snaphooks at each end  
Internal shock absorbing core

Restraint Lanyards:  
Rope, Wire Rope, & Web (Positioning Only)

Positioning lanyards should be used in conjunction with a back-up fall arrest device.

- ✔ Standard length 6', additional lengths available
- ✔ Additional snaphook options available see pages 60-65



**404**  
6' polyblend rope lanyard  
#Z74 locking snaphook at one end  
#Z136 rebar snaphook (2 1/2" opening other end)



**400**  
6' polyblend rope lanyard  
#Z74 locking snaphooks each end



**470**  
7/32" vinyl coated 6' wire rope lanyard  
#Z74 locking snaphooks at each end



**Q 450B**  
6' synthetic web lanyard  
#Z74 locking snaphooks at each end  
Adjustable length



Positioning & Restraint  
Rebar Assemblies

These positioning and chain assemblies can be used to limit free fall distance to 2' or less. FrenchCreek can customize any assembly to your specific job application. Please inquire.


- ✔ Quickly connect to rebar and structures
- ✔ Chain or webbing
- ✔ Non-swivel or swivel



**324-C**  
Chain positioning assembly, 12 links  
#Z136 (2 1/2" opening snaphook)  
Two #Z74 (3/4" opening) locking snaphooks



**324-CSZ**  
Chain positioning assembly, 12 links  
#Z136 (2 1/2" opening snaphook)  
Swivel  
Two #Z74 (3/4" opening) locking snaphooks

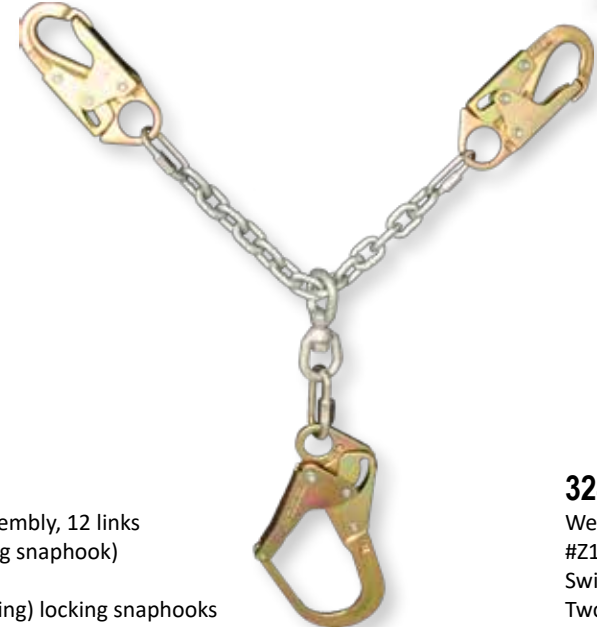

**324-WS**  
Web positioning assembly  
#Z136 (2 1/2" opening) snaphook  
Swivel  
Two #Z74 (3/4" opening) locking snaphooks



Lanyard Customization Options:  
Customize & Optimize Your Lanyard

FrenchCreek offers many options when ordering lanyards; from custom lengths to a wide variety of snaphooks. We also offer the following options/accessories to keep you safe, give you peace of mind, and facilitate all of your on-the-job duties!



**Choke-Loop 1**  
Pack-style shock absorber  
Looped End



**Choke-Loop 2**  
Internal shock absorber  
Looped end



**353**  
Pack-style shock absorber  
D-Ring one end  
#Z74 locking snaphook other end

**EXT**  
Additional D-Ring added to lanyard  
Provides secondary in-line attachment point



**346AS-EXT**  
Pack-style shock absorber  
Choke loop  
D-Ring extension one end  
#63 (3/4" opening) snaphooks each end



# When a fall occurs, minutes matter!

It is common knowledge in the fall protection industry that every minute in suspension after a fall is extremely crucial! Suspension trauma is a real condition that can occur when a worker is suspended even for a short amount of time. The U-Res-Q system can relieve 100% of harness tension.

Should even the slightest fall occur, the light-weight pouch releases into rescue mode by automatically ejecting a high strength, 16’ synthetic rescue ladder. At that point the worker can climb back onto the work platform, or simply stand on the ladder to relieve pressure, increase blood flow, and ensure enough time for emergency response.

Products shown:  
R490A -16’ Self-rescue lanyard  
22850B-TS STRATOS full body harness



## LANYARD OPTIONS

### U-RES-Q Self Rescue System

The U-RES-Q is available on many FrenchCreek shock absorbing lanyards. A standard shock absorbing lanyard may save you in the event of a fall, but remaining suspended is another problem entirely. The U-RES-Q should be used in conjunction with a full body harness.

- ✔ 16’ standard length, other lengths available
- ✔ Helps to reduce the harmful affects of suspension trauma
- ✔ *Available option to most lanyards*



**R-RETRO**  
*Retro fit U-Res-Q to any lanyard*  
U-Res-Q pouch  
#Z74 (3/4” opening) locking snaphook  
D-Ring other end  
Use in-line with lanyard & anchor point



**R490A**  
6’ x 1 3/4” shock absorbing lanyard with pack  
#Z74 (3/4” opening) locking snaphooks at each end  
U-Res-Q pouch ejects 16’ rescue ladder



**R-RESC**  
*U-Res-Q pouch with Velcro bottom*  
20’ rescue ladder  
#63 (3/4” opening) captive eye carabiner  
*Manually deployed model, does not auto-eject*






# SNAPHOOKS & CARABINERS

## All FrenchCreek snaps withstand a load of 5,000 lbs.

Whether you're searching for steel or aluminum hardware, all FrenchCreek snaps are designed to be self-locking and self-closing, meeting the criteria to endure a direct force of 3,600 lbs. Each hook has the capacity to withstand a load of 5,000 lbs., sufficient to support the weight of a full-sized pickup truck.


*To exceed the ANSI Z359 requirements, All FrenchCreek snaps have been subject to the following testing:*

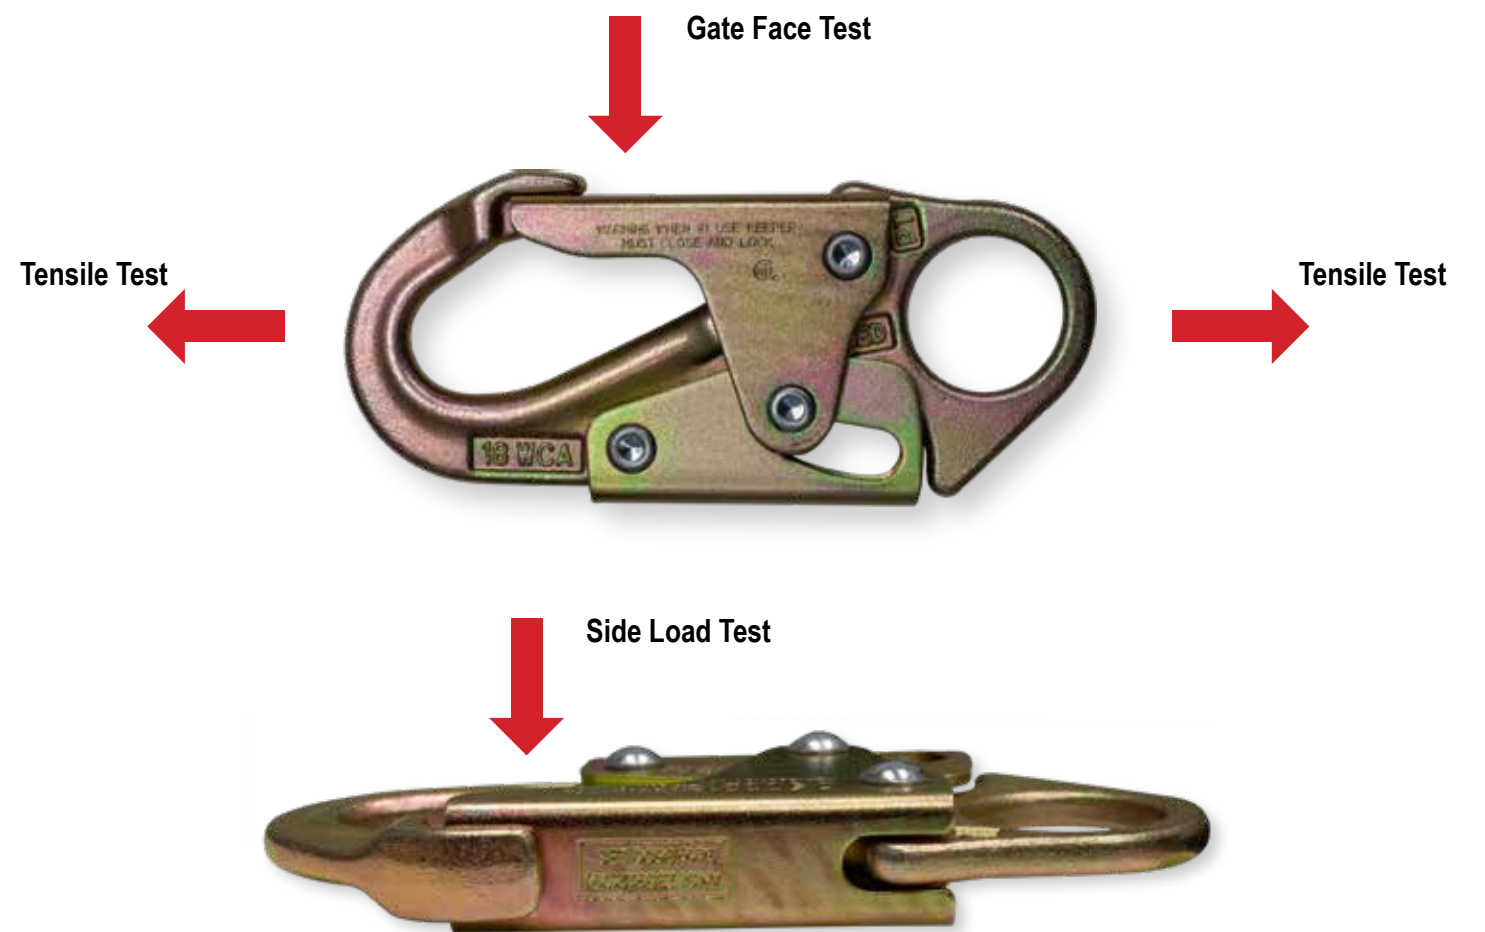


## ANSI Test Requirements

- Tensile load requirement must withstand 5,000 lbs.
- Gate face strength requirement must withstand 3,600 lbs.
- Side gate strength requirement must withstand 3,600 lbs.




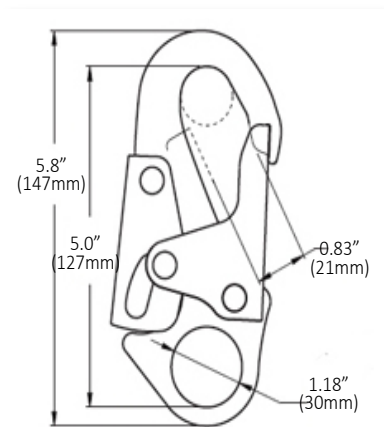


**#Z74**  
**Steel locking snaphook, 3/4" gate**  
Proof loaded up to 3,600 lbs.  
Minimum breaking load: 5,000 lbs.

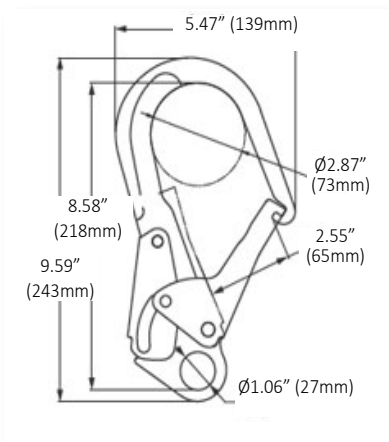


**#Z136**  
**Steel locking rebar snaphook, 2 1/2" gate**  
Proof loaded up to 3,600 lbs.  
Minimum breaking load: 5,000 lbs.

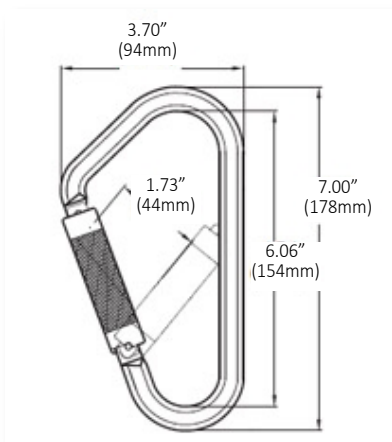


**#65**  
**Steel twist-lock scaffold hook, 1 3/4" gate**  
Proof loaded up to 3,600 lbs.  
Minimum breaking load: 5,000 lbs.

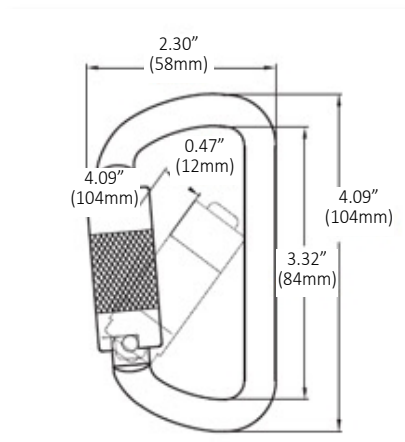


**#354-1**  
**Steel twist-lock carabiner, 1/2" gate**  
Proof loaded up to 3,600 lbs.  
Minimum breaking load: 5,000 lbs.

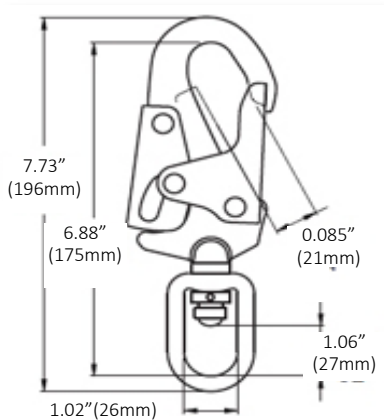


**#RL-28**  
**Steel swivel locking snaphook, 3/4" gate**  
Impact Indicator  
Proof loaded to 3,600 lbs.

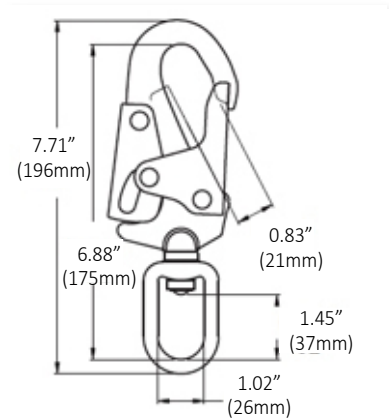


**#49**  
**Steel swivel locking snaphook, 3/4" gate**  
Proof loaded to 3,600 lbs.  
Minimum. breaking load: 5,000 lbs.

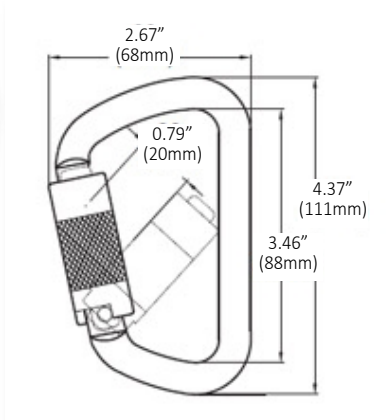


**#354-5**  
**Steel twist-lock carabiner, 3/4" gate**  
Proof loaded to 3,600 lbs.  
Minimum. breaking load: 5,000 lbs.

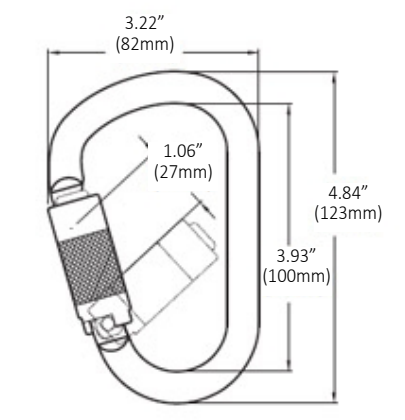


**#354-4**  
**Steel twist-lock carabiner, 1" gate**  
Proof loaded to 3,600 lbs.  
Minimum. breaking load: 5,000 lbs.

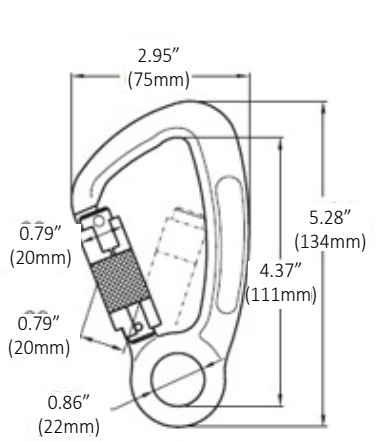


**#63**  
**Steel locking snaphook, 3/4" gate**  
Captive eye  
Proof loaded up to 3,600 lbs.  
Min. breaking load: 5,000 lbs.

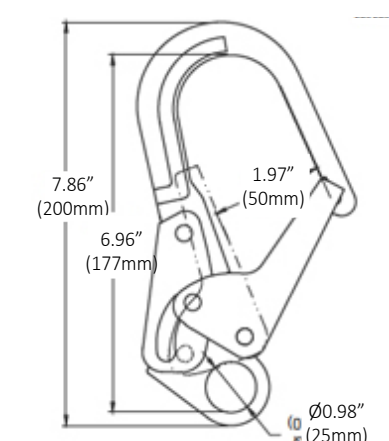

**#69**  
**Steel locking rebar snaphook, 1 3/4" gate**  
Proof loaded up to 3,600 lbs.  
Min. breaking load: 5,000 lbs.

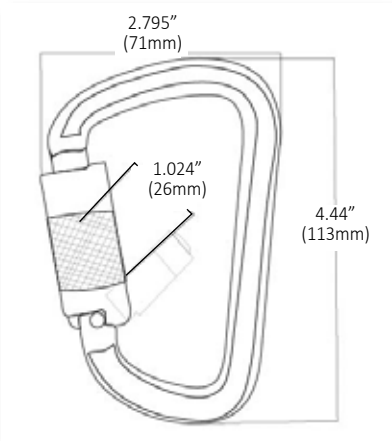


**#354-2Z**  
**Steel twist-lock carabiner, 1" gate**  
Proof loaded up to 3,600 lbs.  
Min. breaking load: 5,000 lbs.

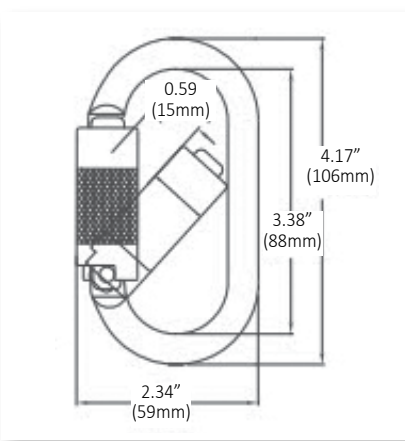


**354-6TL**  
**Steel twist-lock carabiner, 3/4" gate**  
Proof loaded up to 3,600 lbs.  
Min. breaking load: 5,000 lbs.




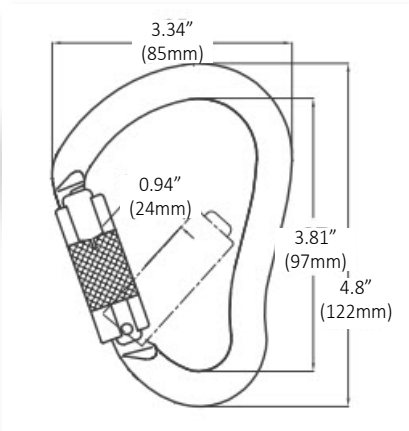


**#354-3A**  
**Aluminum twist-lock carabiner, 7/8" gate**  
Proof loaded up to 3,600 lbs.  
Minimum breaking load: 5,000 lbs.

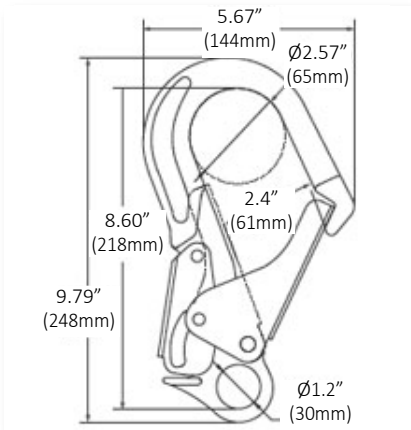


**#135A**  
**Aluminum rebar snaphook, 2 1/2" gate**  
Proof loaded up to 3,600 lbs.  
Minimum breaking load: 5,000 lbs.

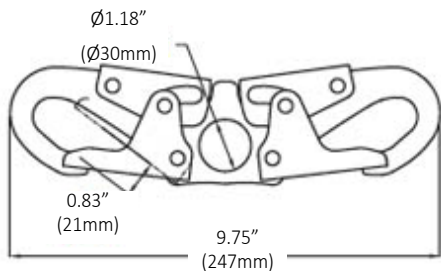


**#274**  
**Steel locking spreader snaphook, 3/4" gates**  
Proof loaded up to 3,600 lbs.  
Minimum breaking load: 5,000 lbs.

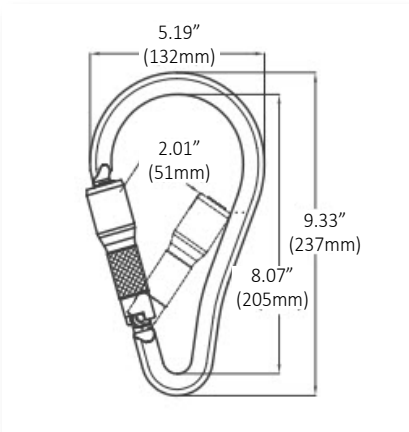


**#62A**  
**Aluminum twist-lock carabiner, 2" gate**  
Proof loaded to 3,600 lbs.  
Minimum breaking load: 5,000 lbs.

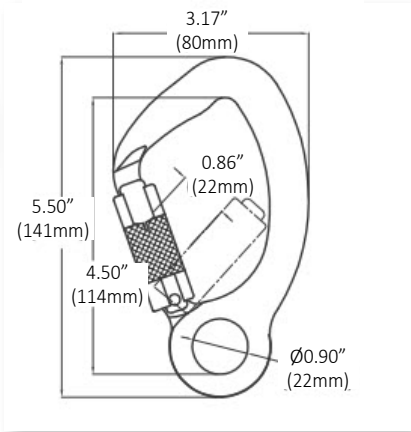


**#63A**  
**Aluminum twist lock carabiner, 7/8" gate**  
Proof loaded to 3,600 lbs.  
Minimum breaking load: 5,000 lbs.

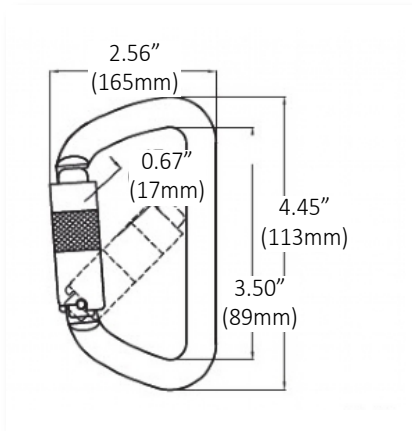


**#354-4SS**  
**Stainless steel twist-lock carabiner, 1" gate**  
Proof loaded up to 3,600 lbs.  
Minimum breaking load: 5,000 lbs.

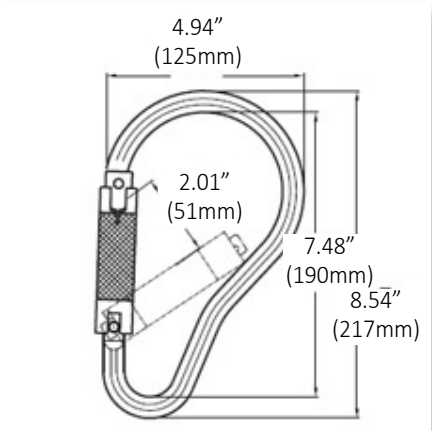


**#62R**  
**Steel twist-lock carabiner, 2" gate**  
Proof loaded to 3,600 lbs.  
Minimum breaking load: 5,000 lbs.

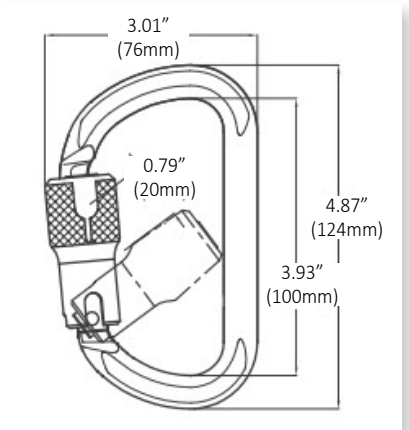

**#354-2A**  
**Aluminum twist-lock carabiner, 7/8" gate**  
Proof loaded up to 3,600 lbs.  
Min. breaking load: 5,000 lbs.

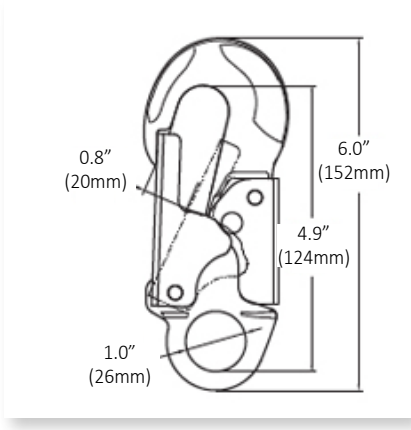

**#74A**  
**Aluminum locking snaphook, 3/4" gate**  
Proof loaded up to 3,600 lbs.  
Min. breaking load: 5,000 lbs.

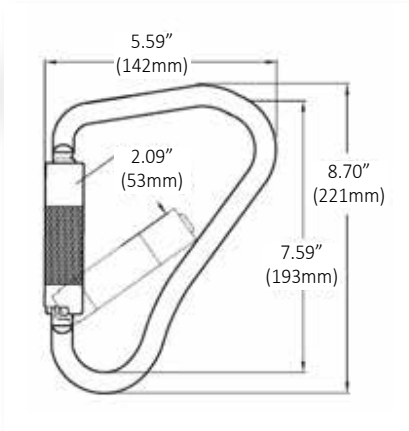

**#62**  
**Steel twist-lock scaffold hook, 2" gate**  
Proof loaded to 3,600 lbs.  
Minimum breaking load: 5,000 lbs.



# ANCHORAGE CONNECTORS

## Steel Series

### Anchorage Connectors

FrenchCreek features a complete line of steel anchorage connectors ranging from removable and reusable to permanently affixed. These anchors are connected to solid steel structures and/or steel I-beams.



#### 1300-WP

##### Web tie-off adapter

1 3/4" web, 3" wide polyester wear pad  
3" D-ring one end, 2" D-ring opposite end

#### 1324-WP

2' tie-off adapter

#### 1336-WP

3' tie-off adapter

#### 1396-WP

8' tie-off adapter

#### 1348-WP

4' tie-off adapter

#### 1372-WP

6' tie-off adapter

#### 1324-10WP

10' tie-off adapter

Available in additional lengths



#### 1100

##### Web tie-off adapter

1 3/4" web, D-ring one end

#### 1124

2' tie-off adapter

#### 1136

3' tie-off adapter

#### 1148

4' tie-off adapter

#### 1172

6' tie-off adapter

Available in additional lengths



#### 1300

##### Web tie-off adapter

1 3/4" web  
3" D-ring one end, 2" D-ring opposite end

#### 1324

2' tie-off adapter

#### 1336

3' tie-off adapter

#### 1348

4' tie-off adapter

#### 1372

6' tie-off adapter

Available in additional lengths



#### 1122HD

##### Web scaffold/pipe choker

1" 9800 lb. web, choker style, 22" long  
Attaches to anchors up to 3" diameter

Available in additional lengths





**1100 HOT WORK**  
*Kevlar Web tie-off adapter*  
Web chocker style  
1 3/4" *Kevlar* web with D-ring

<b>1124K</b> 2' tie-off adapter	<b>1136K</b> 3' tie-off adapter
<b>1148K</b> 4' tie-off adapter	<b>1172K</b> 6' tie-off adapter

*Available in additional lengths*



**1600VC**  
*Cable tie-off adapter* (pass-thru style)  
5/16" vinyl coated cable  
4" O-ring one end, 3" O-ring opposite end

<b>1636VC-516</b> 3' tie-off adapter	<b>1672VC-516</b> 6' tie-off adapter
<b>1648VC-516</b> 4' tie-off adapter	<b>1696VC-516</b> 8' tie-off adapter

*Available in additional lengths*



**1760-12-S**  
*12" Anchor Post* (Bolts to steel surfaces)  
Includes four 1/2"-13X 3" length grade 5 bolts, nuts, & washers  
Accommodates up to 1 1/2" steel thickness



**1775-S3**  
*Steel anchor plate* (Bolts to steel surfaces)  
1/4" stainless steel anchor plate with, grade 8 bolt, nut, & washer  
1 3/4" webbing with D-ring  
1 3/4" maximum steel thickness



**1701**  
*Bolt-On anchor plate with D-ring*  
Removable and reusable  
Fasteners not included

**1701-CSW**  
Weld-on carbon steel anchor plate w D-ring

**1701-SSW**  
Weld-on stainless steel anchor plate w D-ring



**1550**  
*D-bolt anchor* (designed for anchoring into steel structure)  
Designed to prevent roll-out of snaphooks  
Grade 8, 1/2" bolt, washer, and lock nut  
1 3/4" maximum steel thickness



**1769**  
*Steel toggle anchor* (Installs into pre-drilled hole)  
Fits 3/4"- 1 1/4" pre-drilled holes  
1" maximum steel thickness




*1769 Girder Anchor in use*



I-Beam

Anchorage connectors

Light, smooth, and easy to use, FrenchCreek’s I-beam anchors are designed to connect to a steel I-beam for fall protection. The clamps attach without tools to I-beams either overhead or underfoot.

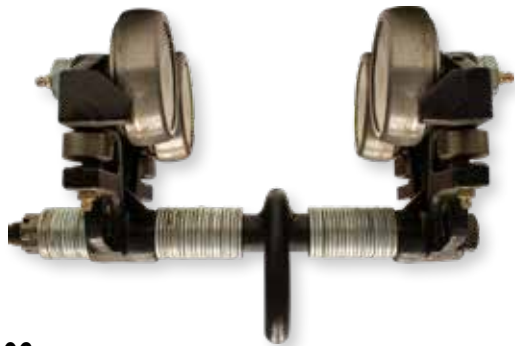

**106**  
*Sliding beam trolley*  
Adjustable flange width from 3”-8”  
Maximum flange thickness 1”, minimum radius bend 2’



**1700**  
*Adjustable sliding beam anchor*  
Fits flanges 3 1/2” to 12” wide, up to 1 1/4” thick  
Usable on top or bottom of I-beam  
Center D-Ring for smoother slide



**1702**  
*Adjustable sliding beam anchor*  
Fits flanges 3 1/2” to 14” wide, up to 1 1/4” thick  
Usable on top or bottom of I-beam  
Floating D-Ring



106 in use



Photo Credit: SEAA/Trivent Safety Consulting

Concrete

Anchorage Connectors

FrenchCreek’s pour-in place concrete anchor straps are designed to provide temporary anchorage in concrete. The 1 3/4” wide abrasion resistant webbing and forged steel D-Ring are rated at 5,000 lbs.



**1124C**  
*2’ concrete anchor strap*  
D-Ring for connection  
Additional lengths available



**1770**  
*3/4” portable/reusable concrete hole anchor*  
Rated to 5,000 lbs  
Use for vertical and overhead concrete



1770 in use




**1760-12-1525**  
*Permanent structure post anchor*  
Fixed welded D-Ring



TC-100  
Overhead concrete anchor

This concrete anchor is placed through a hole in the concrete floor, providing workers on a lower level an overhead anchor point.

TC-100  
Overhead concrete anchor

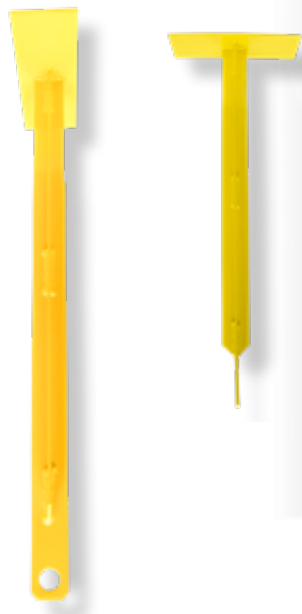


1789  
Parapet Wall Anchor

The FrenchCreek parapet wall anchor is designed to provide a single worker with a portable, temporary anchorage on parapet walls up to 20" thick.

- ✔ Perfect for window washing, construction, and rescue
- ✔ One padded fixed leg and one padded adjustable leg
- ✔ Multiple pin sets and adjustable mounting pad
- ✔ Sized and secured without the use of tools

@1789  
Adjustable parapet anchor  
Up to 20" width

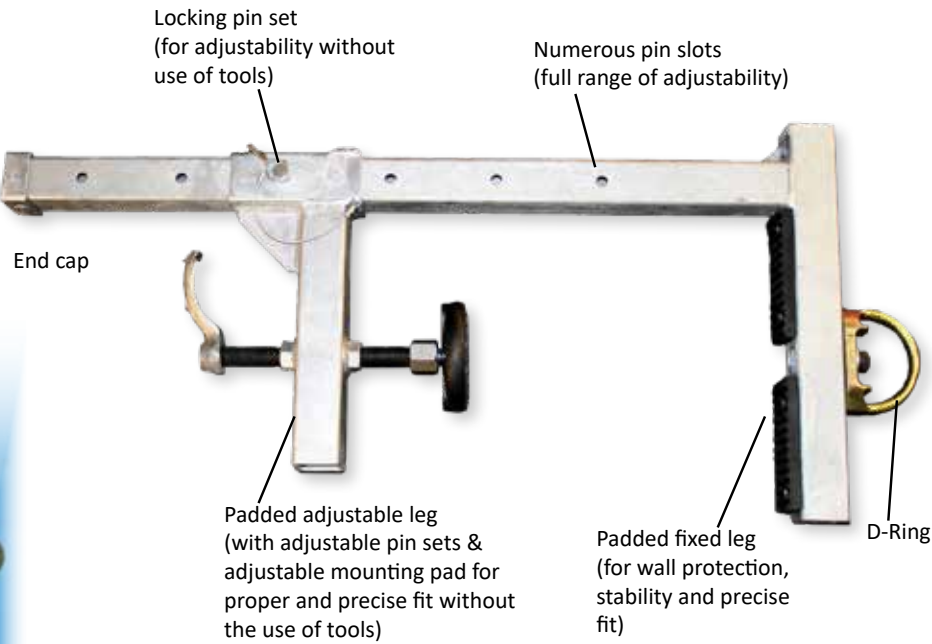



1785  
Door Jamb Anchor

FrenchCreek's door jamb anchor is designed to be used as a temporary anchor that mounts in a door or window opening. Applications include construction, roof tops with door entrances, elevator shafts, wall openings, emergency/rescue situations and more.

- ✔ Fits 24"-48" wide door or window openings
- ✔ One fixed leg and one adjustable leg
- ✔ Unit can be sized and secured without the use of tools

@1785  
Adjustable door jamb anchor  
24"-43" wide  
Heavy duty steel tubing

Shown:  
1785 adjustable door jamb anchor  
XR-30LEG Self-Retracting Lifeline  
22850B STRATOS Full Body harness

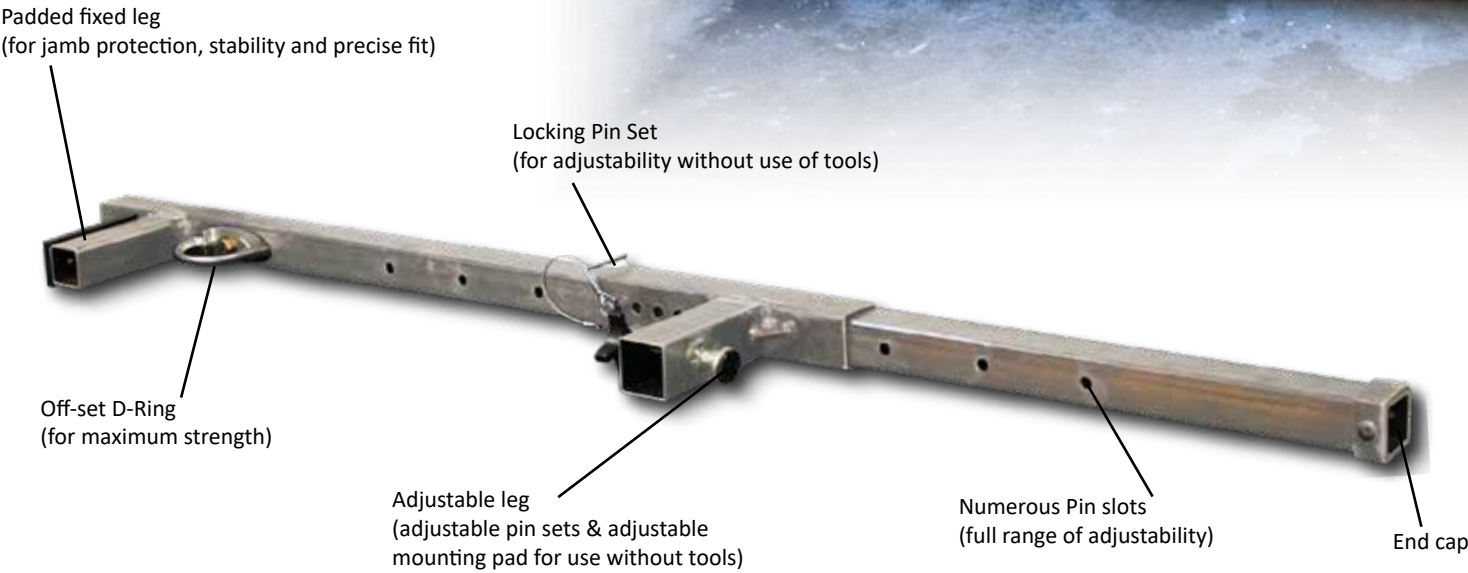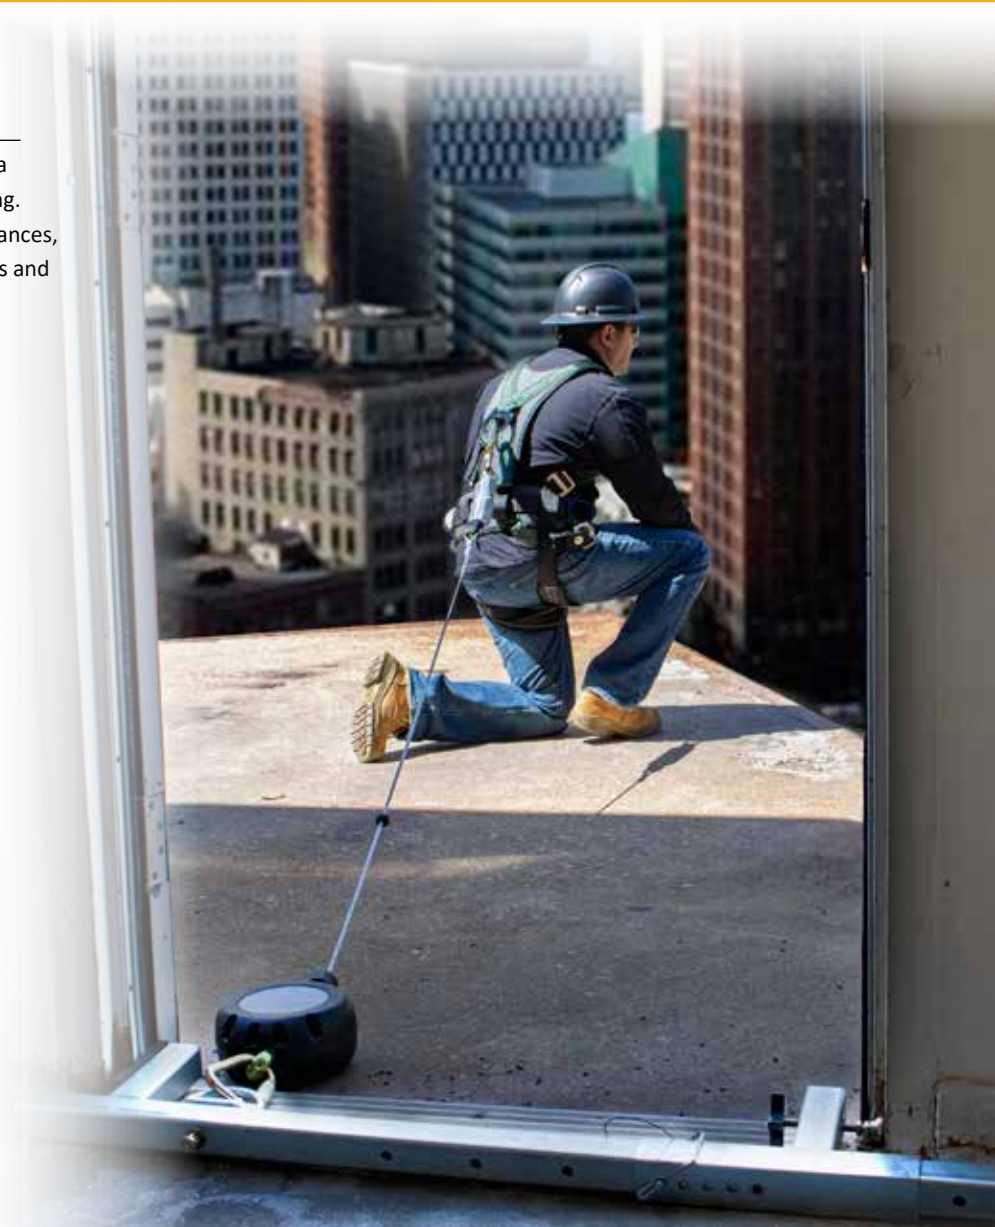



1790  
Rail Anchor

The rail anchor is designed to meet the needs of those workers that are working on a railway line that requires a compliant means to anchor personal fall arrest systems.

- ✔ Quickly affixes to a 55-100 lb. rail
- ✔ Allows some horizontal movement
- ✔ Working capacity 310 lbs. with tools and equipment
- ✔ Powder coated steel
- ✔ *Unit is not designed to pass rail splice plates*



1790  
Steel rail anchor  
Carabiner & lanyard included (450A-3542)

RT0-12  
Remote Tie-Off/First Man Up Pole

With it's lightweight and compact design the RTO-12 is a crucial tool for ensuring worker safety in applications without a proper fall arrest system in place.

- ✔ Pole extends 13' allowing average user to reach elevated tie-off points 17' high
- ✔ Operation handle controls snaphook opening
- ✔ Allows for connection to SRL and rope lifelines
- ✔ Includes carry bag



Shown:  
RG3-13-0Z Renegade SRL  
*Sold Separately*

@RT0-12  
Remote Tie-Off Pole  
Complete pole assembly  
Carry bag

Multi-Use  
Anchorage Connectors


FrenchCreek's multi-use anchorage devices can be used in a variety of applications, however some limitations may apply. FrenchCreek experts are available for inquiries and consultations and can make recommendations concerning the proper anchorage connection for your job.

@1503  
5" stainless steel wire hook anchor  
Rated to 400 lbs.  
Connects to various anchors



1503

1824  
24" anchor strap  
#Z136 (1 3/4" gate opening) rebar snap  
Connecting D-Ring on opposite end

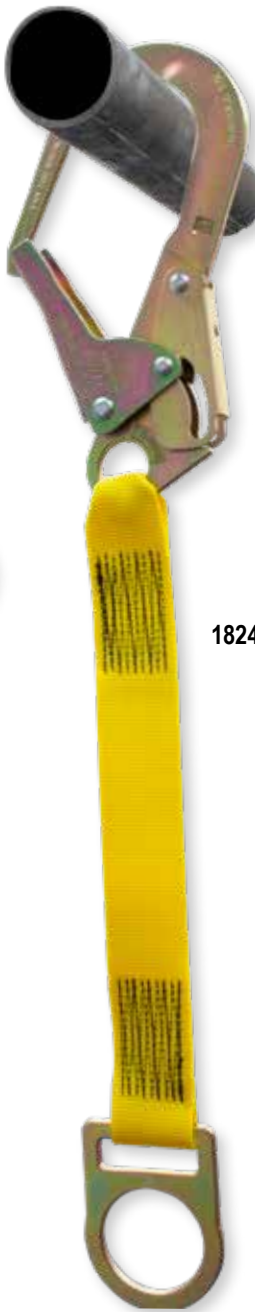

1824

4157  
5' Boom strap anchor with ratchet buckle design  
1 3/4" polyester webbing  
Plated hardware




4157





# SELF-RETRACTING LIFELINES

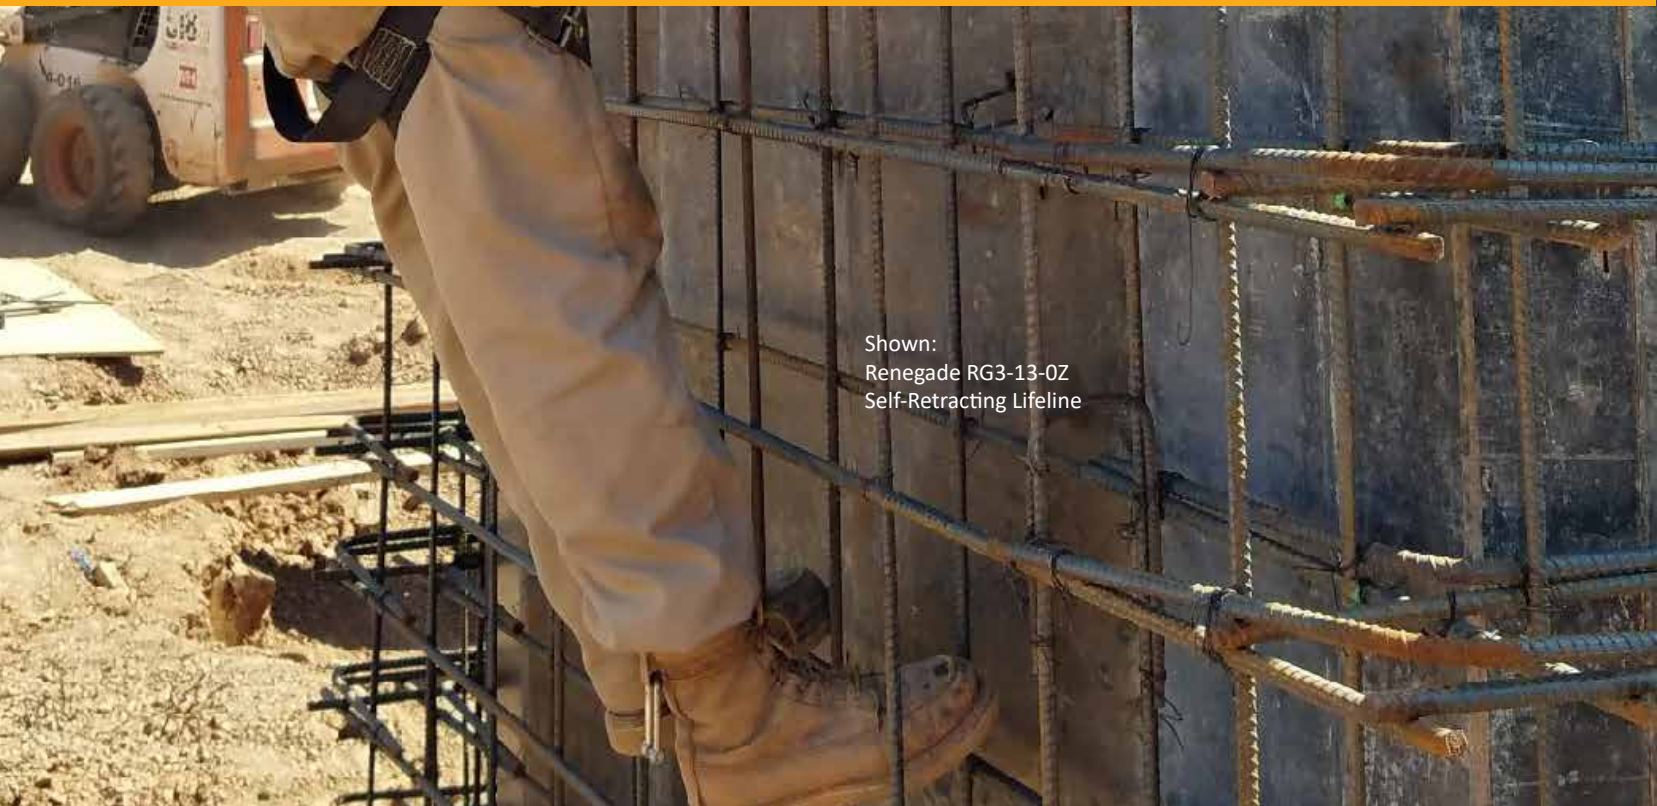

Shown:  
Renegade RG3-13-0Z  
Self-Retracting Lifeline

## Renegade Series 13' Compact Self-Retracting Lifeline

The Renegade series provides durability and confidence expected by professionals. Featuring 13 ft. of working capacities with quick fall arrest capability, the Renegade will never let you down.

- ✔ 13' of working length
- ✔ Capacity 130-310 lbs. ANSI, 400 lbs. OSHA
- ✔ No annual factory certification required
- ✔ Short fall arrest Class "1" SRL

### Variety of 5,000lb connectors



#Z74  
Snap

#62  
Carabiner

**Heavy Duty**  
Corrosive resistant housing made of aluminum and stainless steel.

**Swivel Anchor Loop**  
Swivels 360° to limit line twisting for smooth operation.

**Impact Indicator**  
Visual impact indicator warns that the unit has experienced fall-arrest forces and must be removed from service.

**Compact Shock Pack**  
Shock absorbing pack minimizes fall arrest forces.

**Weight Capacity**  
Renegade series meets:  
ANSI requirement 130-310 lbs.

OSHA requirement 420 lbs. or less


**Snaphook options**  
For a complete list of snaphook and connector options *see pages 60-65*

Class  
**1**  
Anchor at or above dorsal D-ring



Rogue  
8' Sub-Compact Self-Retracting Lifeline

FrenchCreek's Rogue Self-Retracting Lifeline is light on your back, but heavy on features. The lightweight design is perfect for all day use, and the 8' length gives your workers the freedom of movement.

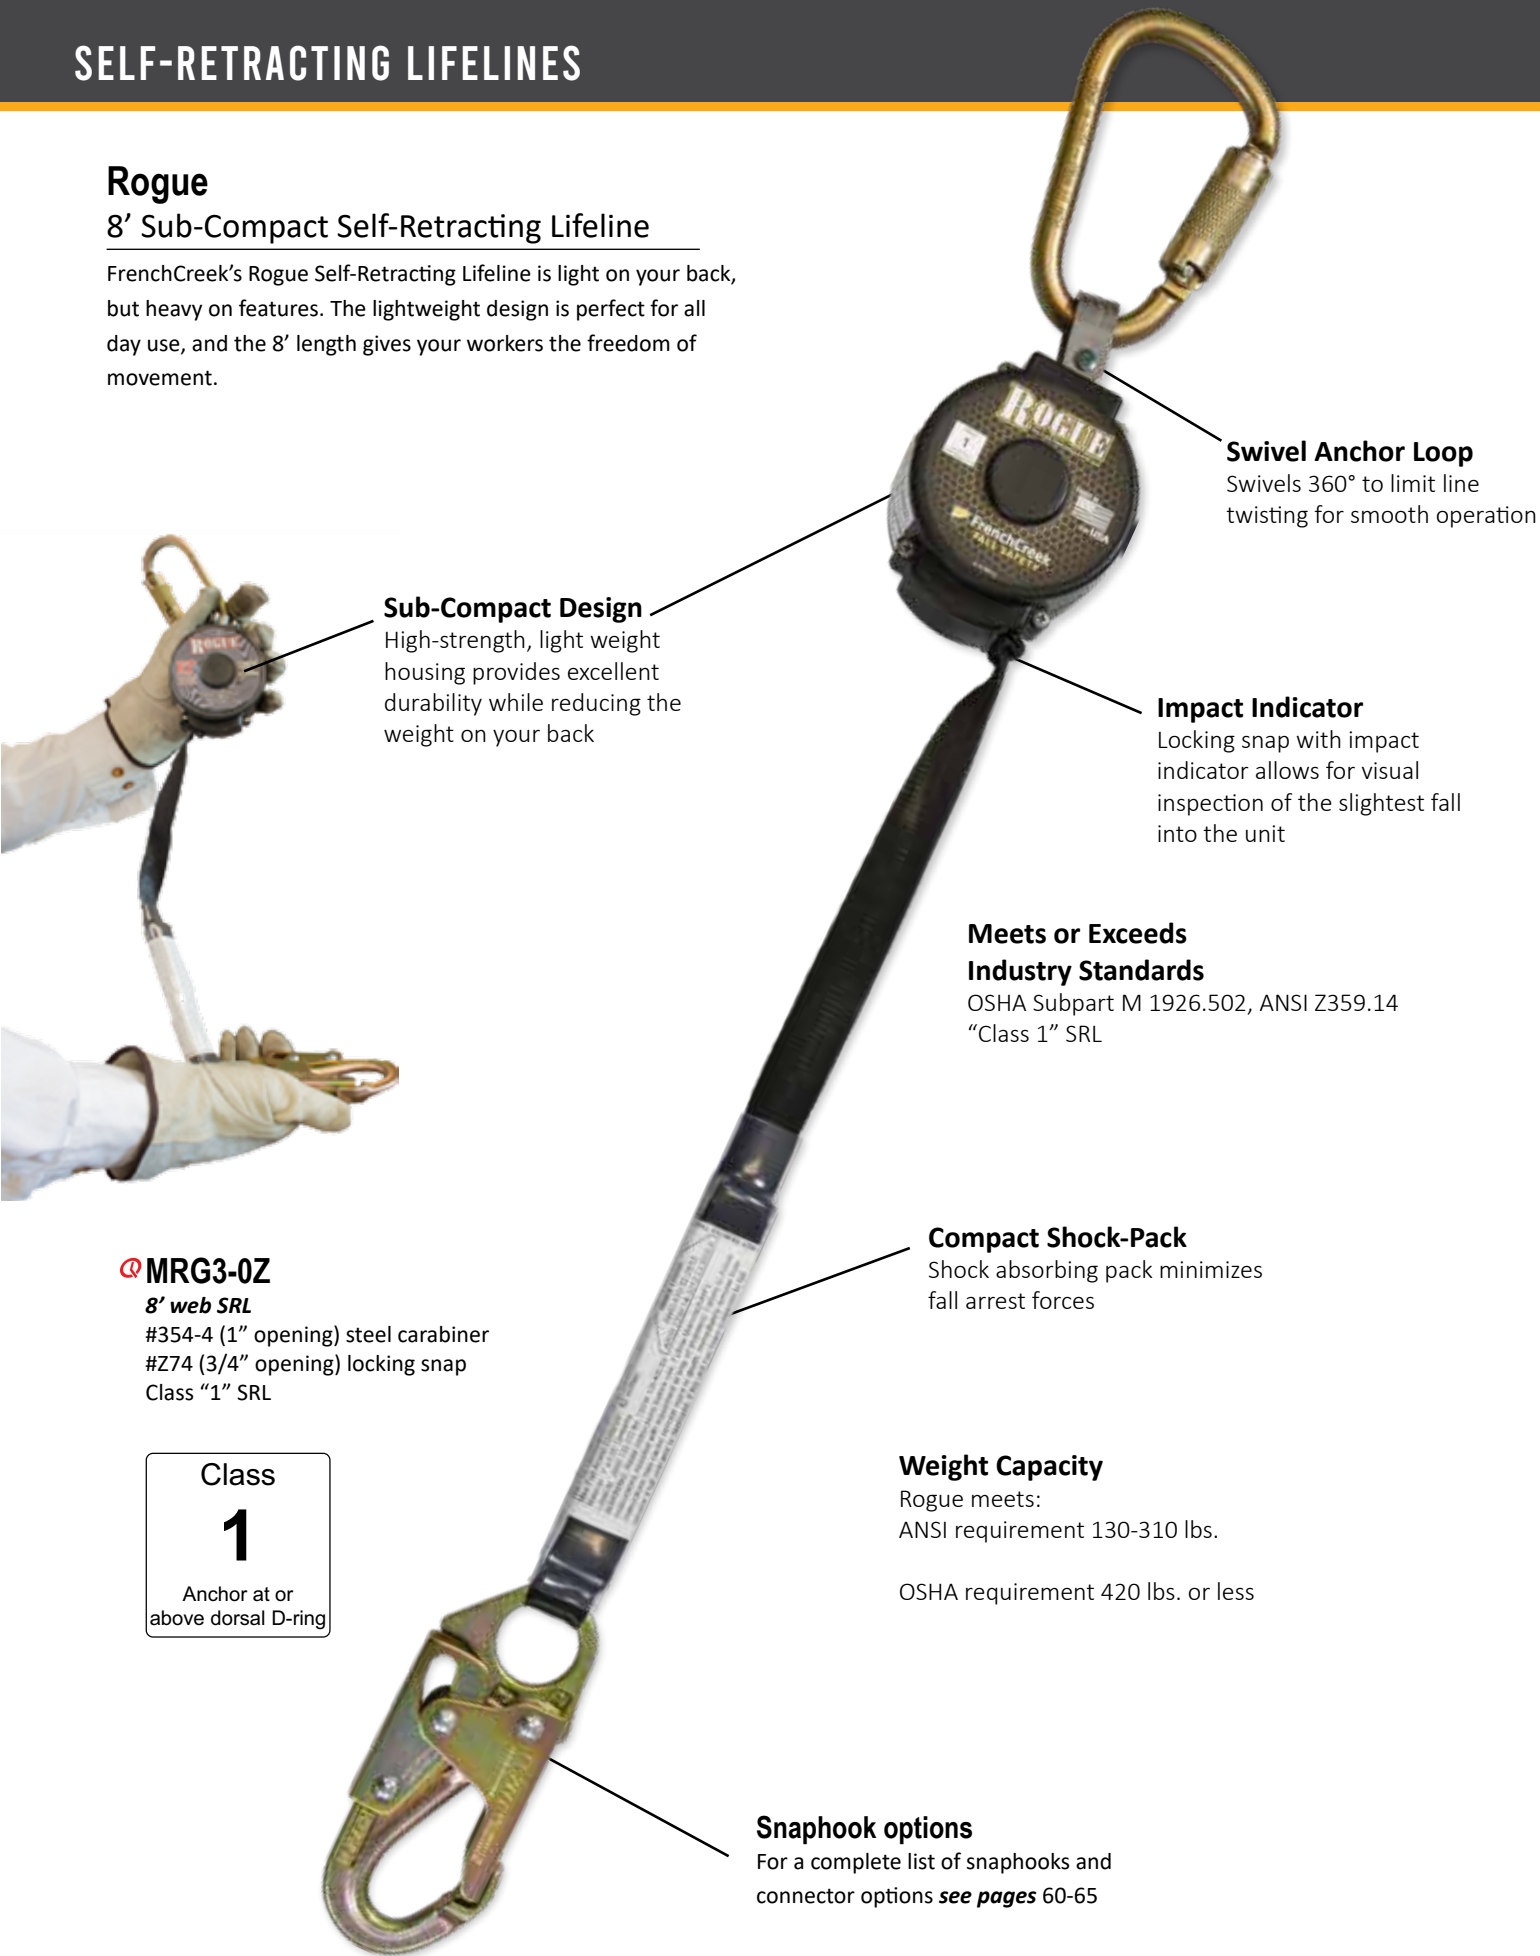

MRG3-0Z  
8' web SRL  
#354-4 (1" opening) steel carabiner  
#274 (3/4" opening) locking snap  
Class "1" SRL

Class  
**1**  
Anchor at or  
above dorsal D-ring

Rogue Dual-Leg  
8' Sub-Compact Self-Retracting Lifeline

The Rogue features a Dual-leg configuration perfect for 100% tie-off allowing a worker to move freely and transition from anchor point to anchor point safely.



M2RG-4Z  
8' dual-leg web SRL  
#354-4 (1" opening) steel carabiner  
(2) #ZZ136 (2 1/2" opening) locking rebar snaps  
Class "1" SRL

M2RG-0Z  
8' dual-leg web SRL  
#354-4 (1" opening) steel carabiner  
(2) #274 (3/4" opening) locking snap  
Class "1" SRL

354-MR  
Dorsal connector for personal SRL's  
Triple action sliding gate  
2" open capacity  
Two-press to release buttons  
\*Optional for quick dual leg connection

Dual-leg Attachment  
The Dual-leg configurations of the Rogue SRL attaches underneath the web loop of the harness, allowing the fall arrest D-Ring to still be usable.  
  
\*354-MR is an optional connector for quick and easy personal SRL attachment.



# OUTLAW

## Self-Retracting Lifelines

**Internal Energy Absorption System**  
Reduces fall arrest forces and minimizes free fall distance should a fall occur.

**Weight Capacity**  
Outlaw series meets:  
ANSI requirement 130-310 lbs.

OSHA requirement 420 lbs. or less

**Impact Indicator**  
Locking snap with impact indicator allows for visual inspection of the slightest fall into the unit

Class  
**1**  
Anchor at or above dorsal D-ring

**Swivel Anchor Loop**  
Swivels 360° to limit line twisting for smooth operation

**Light, Durable Housing**  
High-strength, light weight housing provides excellent durability

**Short Fall Arrest Activation**  
Unit will stop a fall within inches, reducing fall distances and reducing fall arrest forces to 1,800 lbs., or less

**Lifeline Constituents**  
Choose the cable type to meet the specific needs of your job requirement:  
Galvanized Steel  
Stainless Steel  
Technora® synthetic rope

**Meets or Exceed Industry Standards**  
OSHA Subpart M 1926.502, ANSI Z359.14

### Outlaw Series

#### Self-Retracting Lifeline (XR Series)

The Outlaw Series SRL's provide durability and confidence expected by professionals. With 7, 11, and 30 feet of working capacity and short fall arrest capability, the Outlaw will never let you down.

XR-7W



**XR-7W**  
**7' web SRL**  
#354-4 (1" opening) steel carabiner  
#274 (3/4" opening) locking snap  
Class "1" SRL

XR-11G



**XR-11G**  
**11' galvanized steel cable SRL**  
#354-4 (1" opening) steel carabiner  
RL-28 (3/4" opening) locking snap  
Class "1" SRL

**XR-11SS**  
**11' stainless steel cable SRL**

**XR-11T**  
**11' Technora® synthetic rope SRL**

XR-30G



**XR-30G**  
**30' galvanized steel cable SRL**  
#354-4 (1" opening) steel carabiner  
RL-28 (3/4" opening) locking snap  
Class "1" SRL

**XR-30SS**  
**30' stainless steel cable SRL**

**XR-30T**  
**30' Technora® synthetic rope SRL**





# OUTLAW

## Leading Edge Self-Retracting Lifelines

**Internal Energy Absorption System**  
Reduces fall arrest forces and minimizes free fall distance should a fall occur.

**Weight Capacity**  
Outlaw series meets:  
ANSI requirement 130-310 lbs.  
  
OSHA requirement 420 lbs. or less

**Swivel Anchor Loop**  
Swivels 360° to limit line twisting for smooth operation.

**Light, Durable Housing**  
High-strength, light weight housing provides excellent durability.

**Leading Edge Shock Pack**  
Shock pack reduces fall arrest forces. Shock pack free-fall limit 6'. Max elongation distance 48". Reduces fall arrest forces to 1,800 lbs., or less

**Impact Indicator**  
Locking snap with impact indicator allows for visual inspection of the slightest fall into the unit.

**Meets or Exceed Industry Standards**  
OSHA Subpart M 1926.502, ANSI Z359.14

Class  
**2**  
Anchor above or below dorsal D-ring

### Outlaw Series-Leading Edge Self-Retracting Lifeline (XR Series)

Enter the next level in fall protection with the Outlaw LE SRL, and give your workers confidence while working on the edge.

- ✔ Internal energy absorption system
- ✔ External shock absorbing pack



**XR-50LEG**  
50' galvanized cable Leading Edge SRL  
#354-4 (1" opening) steel carabiner  
RL-28 (3/4" opening) locking snap  
Class "2" SRL



**XR-30LEG**  
30' galvanized cable Leading Edge SRL  
#354-4 (1" opening) steel carabiner  
RL-28 (3/4" opening) locking snap  
Class "2" SRL



**XR-20LEG**  
20' galvanized cable Leading Edge SRL  
#354-4 (1" opening) steel carabiner  
RL-28 (3/4" opening) locking snap  
Class "2" SRL





RL Series  
Self-Retracting Lifelines

The RL Series feature extreme durability with high mobility. These units offer an extended range of movement with zero slack to eliminate tripping hazards. FrenchCreek recommends periodic inspection of these mechanical units as the internal mechanism's are not field inspectable. Periodic factory inspection further increases your level of safety and adds to the product life.

- ✔ Cast aluminum housing
- ✔ Dual internal inertia braking system
- ✔ Lifeline constituents: galvanized wire, stainless steel, or Technora® rope



Class  
**1**  
Anchor at or  
above dorsal D-ring

Ⓜ **RL25AGZ**  
25' galvanized wire rope SRL  
#Z74 (3/4" opening) locking snap  
#354-2Z (1") opening carabiner for anchoring  
Class "1" SRL

**RL25ASZ**  
25' stainless steel wire rope SRL

**RL25ATZ**  
25' Technora® synthetic rope SRL

Repair & Recertification

*FrenchCreek also provides repair & recertification on our mechanical units. This provides tremendously long service life to your products.*

*FrenchCreek recommends periodic inspection of these mechanical units as the internal mechanisms are not field inspectable. Periodic factory inspection further increases your level of safety and adds to the product life.*

*Please contact customer service at:  
877.228.9327 for more information.*



Class  
**1**  
Anchor at or  
above dorsal D-ring

**RL30G & Ⓜ RL50GZ**  
30' or 50' galvanized wire rope SRL  
#RL-28 (3/4" opening) locking swivel snap  
#354-2Z (1") opening carabiner for anchoring  
Class "1" SRL

**RL30SS & RL50SS**  
30' or 50' stainless steel wire rope SRL

**RL30T & RL50T**  
30' or 50' Technora® synthetic rope SRL



**RL100G**  
100' galvanized wire rope SRL  
#49 (3/4" opening) locking swivel snap  
Class "B" SRL


**RL100GSS**  
100' stainless steel wire rope SRL

**RL100T**  
100' Technora® synthetic rope SRL



Ⓜ **459**  
8' web SRL  
#Z74 (3/4" opening) locking snap  
#354-1 (1/2" throat) carabiner  
Class "A" SRL



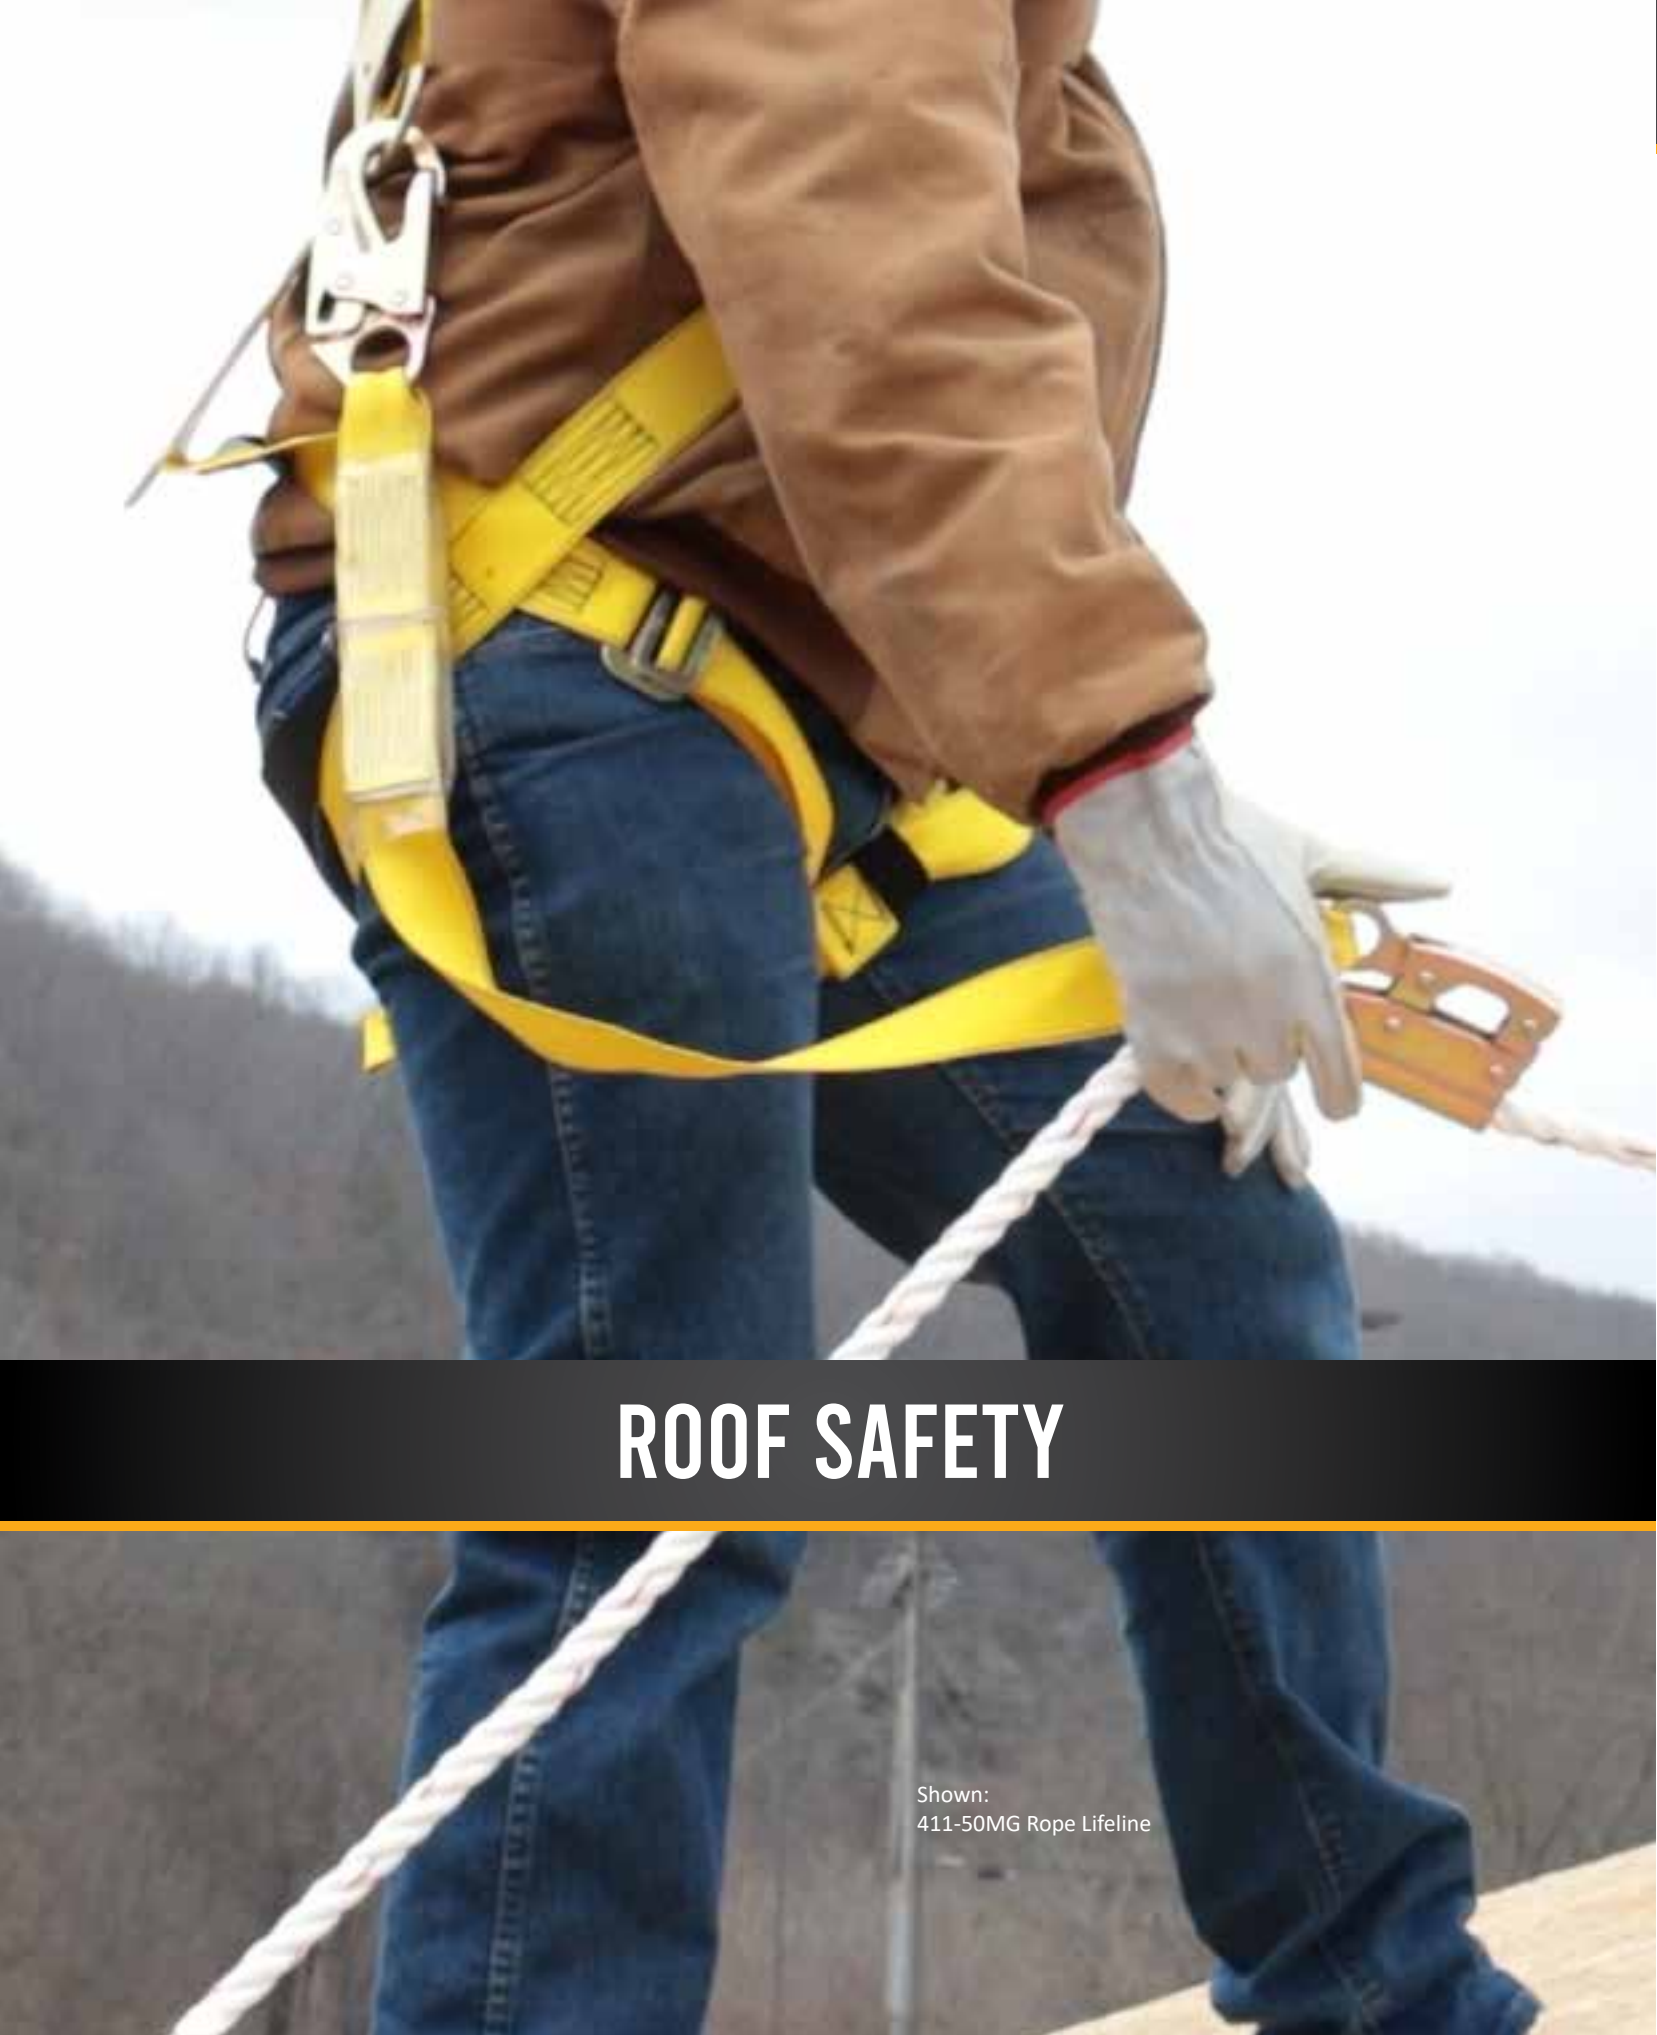

# ROOF SAFETY

Shown:  
411-50MG Rope Lifeline

## RK Deluxe Roofer's Kit Complete Roofer's Kit System

FrenchCreek roofing kits come ready to install. A variety of roof anchors and multiple length of rope are available to fit many residential and industrial applications.

- Kit includes:
- ✔ MRA-R double-plate roof anchor (see page 92)
  - ✔ 410 5/8" lifeline (page 88) with self-locking snap on each end
  - ✔ 1202AN-3 removable, trailing rope grab with 3' shock-absorbing lanyard (page 90)
  - ✔ 631 full body harness (page 32)
  - ✔ Carry bag, and instruction manual

- RK-25**  
25' deluxe roofer's kit
- RK-50**  
50' deluxe roofer's kit

- RK-100**  
100' deluxe roofer's kit



RK-25

## RKB Deluxe Roofer's Kit Complete Roofer's Kit System

FrenchCreek Roofing Kits come ready to install. A variety of roof anchors and multiple lengths of kits are available to fit many residential and industrial applications.

- Kit includes:
- ✔ *Your choice of roof anchor see below*
  - ✔ 411 5/8" lifeline (page 88) with self-locking snap on one end, thimble opposite end
  - ✔ 411-50MG manual rope grab with 3' shock-absorbing lanyard (page 91)
  - ✔ 631 full body harness (page 32)
  - ✔ Carry bucket, and instruction manual



RKB-1715-25

RKB Kit Anchor Selections				
Anchor Options				
25' Kit	RKB-1720-25	RKB-MRA-25	RKB-1715-25	RKB-1725-25
50' Kit	RKB-1720-50	RKB-MRA-50	Ⓢ RKB-1715-50	RKB-1725-50



Rope Lifelines

Polyblend Synthetic Rope


FrenchCreek lifelines are constructed out of a 5/8" 3-strand polyblend synthetic rope, designed for excellent wear, strength, and limited stretch.

- ✔ 5/8" 3-strand polyblend synthetic rope
- ✔ Designed for durability, strength and limited stretch
- ✔ Available in 25' increments, *custom lengths available upon request*



**411**  
5/8" rope lifeline  
#Z74 (3/4" opening) locking snaphook on one end  
Thimble opposite end


-  **411-25**  
25' rope lifeline
-  **411-50**  
50' rope lifeline

-  **411-100**  
100' rope lifeline



**121-2T**  
5/8" rope lifeline  
(2) Thimbles on each end


-  **121-2T-25**  
25' rope lifeline
-  **121-2T-50**  
50' rope lifeline

-  **121-2T-100**  
100' rope lifeline




**410**  
5/8" rope lifeline  
(2) #Z74 (3/4" opening) locking snaphooks

-  **410-25**  
25' rope lifeline
-  **410-50**  
50' rope lifeline

-  **410-100**  
100' rope lifeline



**121-1S**  
5/8" rope lifeline  
#Z74 (3/4" opening) locking snaphook on one end  
"Whipped" opposite end

-  **121-1S-25**  
25' rope lifeline
-  **121-1S-50**  
50' rope lifeline

-  **121-1S-100**  
100' rope lifeline



**121-1T**  
5/8" rope lifeline  
Thimble on one end  
"Whipped" opposite end

-  **121-1T-25**  
25' rope lifeline
-  **121-1T-50**  
50' rope lifeline


-  **121-1T-100**  
100' rope lifeline


Specialty Rope & Accessories

Order all of your rope from FrenchCreek! We can supply you with exactly what you need for all on-the-job applications! Don't see exactly what your looking for? Please inquire.

-  **116-38**  
3/8" Kernmantle® rope


-  **116-12**  
1/2" Kernmantle® rope


-  **121-N**  
5/8" 12-strand polyester rope

-  **122**  
3/8" 3-strand polypropylene rope

-  **RL-27T12**  
3/16" 12 strand Technora® rope

-  **116-716**  
7/16" Kernmantle® rope

-  **120**  
1/2" 3-strand polyblend synthetic rope

-  **121**  
5/8" 3-strand polyblend synthetic rope

-  **121-FN**  
5/8" 3-strand filament nylon rope



**121RP**  
20" long 4 ply 600 denier polyester rope protector  
Velcro & tie strap closure  
Vertical or horizontal use



**121CW**  
5 lb. flexible counterweight bag  
Keeps Lifeline tensioned, prevents excess slack  
Facilitates performance of a trailing rope grab



**1710**  
*Aluminum rope termination plate*  
Fits 5/8" rope Lifelines  
No need for knots, splicing, or crimping



## Rope Grabs

### Rope & Wire Rope Grabs

FrenchCreek offers a comprehensive line of durable, user friendly rope grabs & wire rope grabs. (Lifelines can be purchased separately, and are shown on page 88) These grabs are available in two different styles:

**Manual Rope Grab:** Worker manually slides the device to the desired position on the rope and releases it, locking it on the lifeline and providing the worker with fall protection. Great for sloped roofs because they lock into place once positioned.

**Trailing Rope Grab:** Little or no positioning needed. Trailing grabs move up and down the lifeline with the worker, locking on the rope with any downward pressure.

**Q 1201N**  
Stainless steel trailing rope grab  
Fits 5/8" strand synthetic rope  
Attachable, detachable anywhere on lifeline  
Safety Lock

**Q 1202AN-3**  
1201N rope grab  
3' shock absorbing lanyard  
#Z74 (3/4" opening) locking snaphook



1201N




1201

1202A-3

**Q 1201**  
Stainless steel trailing rope grab  
Fits 5/8" and 3/4" 3-strand synthetic rope  
Attachable, detachable anywhere on lifeline

**1202A-3**  
1201 rope grab  
3' shock absorbing lanyard  
#Z74 (3/4" opening) locking snaphook

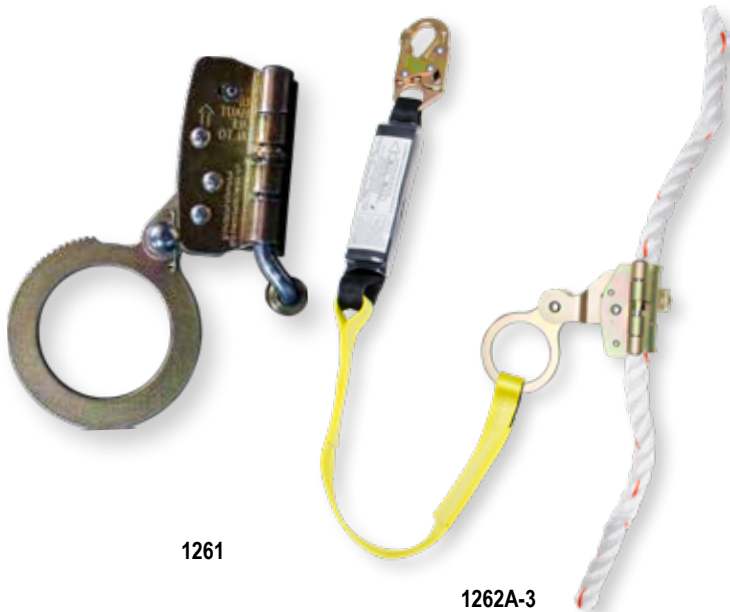

1261

1262A-3

**Q 1261**  
Plated alloy steel trailing rope grab  
Fits 5/8" strand synthetic rope  
Attachable, detachable anywhere on lifeline

**1262A-3**  
1261 rope grab  
3' shock absorbing lanyard  
#Z74 (3/4" opening) locking snaphook



**Q 411-50MG**  
50' X 5/8" polyblend rope  
5/8" manual rope grab permanently installed on rope  
3' shock absorbing lanyard  
#Z74 (3/4" opening) locking snaphook



**Q 1401-38**  
Stainless steel trailing rope grab  
Fits 5/16" and 3/8" wire rope  
Attachable, detachable anywhere on lifeline





Roofing Anchors  
& Anchorage Systems

FrenchCreek provides a wide variety of roof anchors for maintenance work, repair and new construction.



**Q MRA-R1**  
Removable/reusable roof anchor  
Single plate with screws



**MRA-R**  
Removable/reusable roof anchor  
Double plate with screws



**Q 1715**  
Removable/reusable roof anchor  
D-Ring attachment with nails



**Q 1720**  
Disposable roof anchor  
Bracket for use with carabiner, nails



**1725**  
Disposable roof anchor  
Single D-Ring with nails



**Q 1730**  
Permanent roof anchor  
Single D-Ring with nails



**Q 1740**  
Permanent roof anchor  
Double D-Ring with nails



**1760-12-1525**  
Permanent structure post  
Fixed welded D-Ring

Rooftract  
Roof Retractable System

FrenchCreek's Rooftract system is usable on any roof pitch. This systems features FrenchCreek's RL series Self-Retracting Lifeline that rotates 360° for maximum safety and maneuverability.


- ✔ Works on any roof pitch
- ✔ Choose from **RL25, RL30, or RL50** series retractables (page 84-85 )
- ✔ All mounting hardware included



**1791 anchor**



**1791 anchor with  
RL50GZ SRL installed**

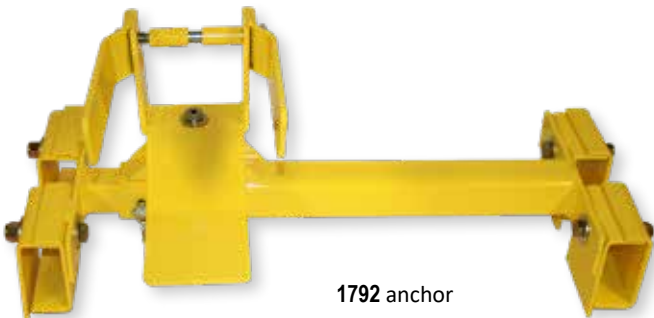

**1792 anchor**



**1792 anchor with  
RL50GZ SRL installed**

**1791**  
Roof mount assembly available for steel, metal, or wood roofs  
Comes as anchor only, retractable sold separately  
360° for maximum maneuverability

**1792**  
Roof mount assembly for standing seam metal roofs  
Comes as anchor only, retractable sold separately  
360° for maximum maneuverability  
Mounting hardware included



## Choosing the correct Horizontal Lifeline System

Choosing the right Horizontal System ensures the complete safety and the maximum productivity of your crew.

*Please consider these factors upon ordering:*

### **Anchorage Structure:**

The structure your system must attach to; such as an I-Beam, rebar stud, concrete column, or roof can dictate the type of specialized system requirement.

### **Clearance requirements:**

The most critical factor is “fall clearance”. OSHA defines “fall clearance” as the minimum vertical distance between the worker and the lower level or obstruction that is necessary to ensure the worker does not contact that obstruction during a fall. There are many factors that come into play when determining fall clearance, including: anchorage height, type of lifeline, length, and the number of workers.

### **Lifeline type:**

Your work environment determines the type of lifeline required. Harsh environments that consist of sparks, abrasive or corrosive materials will require a galvanized or stainless steel options. A synthetic rope system is a great option in an application where being lightweight and compact is key.

### **Number of users:**

Always consider the number of workers required to get the job done. Each system allows for a maximum number of workers per system and must not be exceeded. Always take into account the number of workers per system when determining your “fall clearance.”

## HORIZONTAL LIFELINE SYSTEMS

Shown:  
Traverse Horizontal Lifeline System



### **Contact Customer Service:**

Our industry experts will assist you in selecting the appropriate system to meet the requirements of your job application. **Toll Free 877.228.9327**



TEMPORARY HORIZONTAL LIFELINE  
**TRAVERSE**



Also shown:  
STRATOS full body harness  
ROGUE dual leg sub-compact SRL

Meets or exceeds OSHA & ANSI requirements

**Steel I-Beam Base System**

The Traverse Series temporary horizontal lifeline offers ideal protection when an overhead anchorage does not exist. Extremely lightweight and portable, this system incorporates a modular multi-base design that accommodates a wide range of steel beams.

- ✔ Lengths available to 10'-240'
- ✔ Fits 6"-12" width, up to 2 1/4" flange (options available for beams up to 36")
- ✔ Pass-thru adapters allow continuous tie-off and mobility
- ✔ Capacity: 2 users per span, no more than 6 per total system
- ✔ 42" working height (above beam)
- ✔ Weight: 60' system approximately 99.5 lbs

See page 98 for concrete applications

**Ordering Options**

<b>TRV30S12</b> 30' system, (6"-12" I-beam base)	<b>TRV120S12</b> 120' system, (6"-12" I-beam base)
<b>TRV60S12</b> 60' system, (6"-12" I-beam base)	<b>TRV240S12</b> 240' system, (6"-12" I-beam base)


**System Components**

<b>TRV-S12</b> (6"-12" Steel I-beam stanchion)	<b>TRV-S24</b> (18"-24" Steel I-beam stanchion)
<b>TRV-S36</b> (24"-36" Steel I-beam stanchion)	<b>TRV-PASS</b> Traverse system pass-thru bracket
<b>CHL-CEA</b> Coil energy absorber with shackles	

**Typical Single Span System**

**30' & 60' Systems Include:**

- (2) TRV-S12 (Steel I-beam stanchion)
- (1) Cable assembly with tensioner
- (1) CHL-CEA (Coil energy absorber)

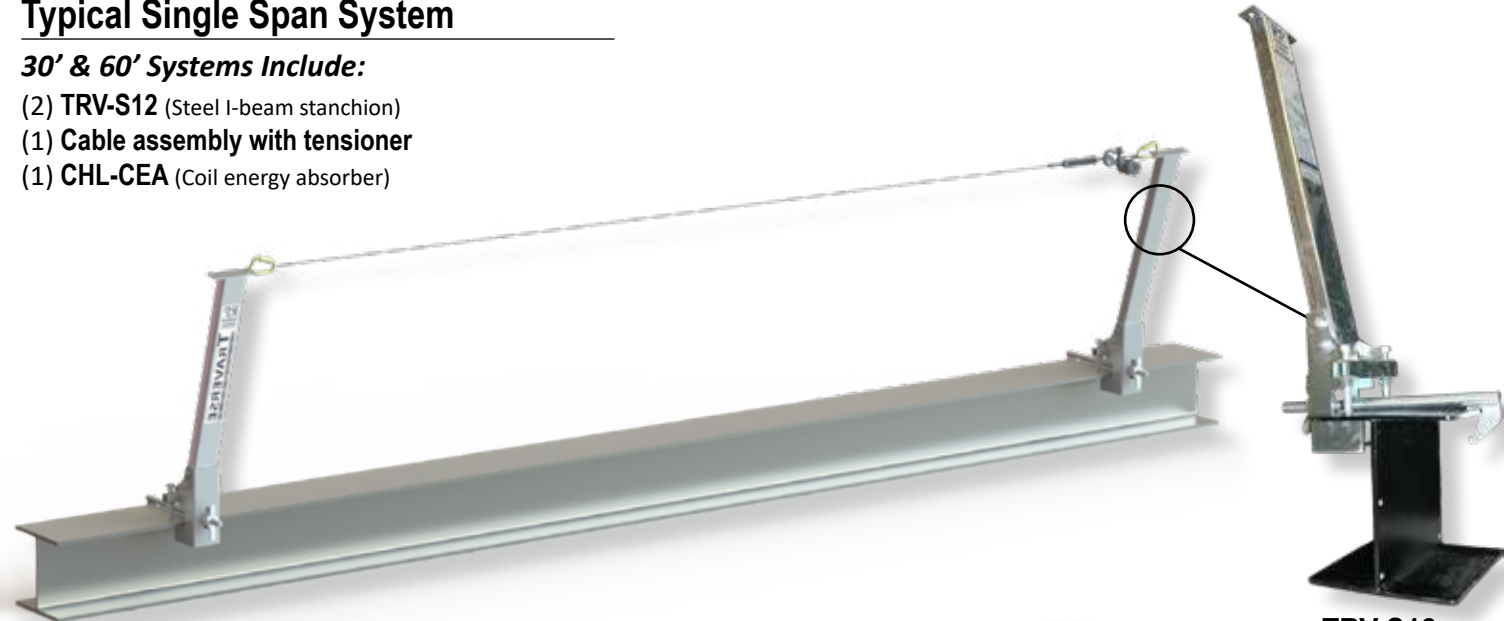

TRV-S12


**Typical Multi-Span System**

**120' System Includes:**

- (3) TRV-S12 (Steel I-beam stanchion)
- (1) Cable assembly with tensioner
- (2) CHL-CEA (Coil energy absorber)
- (1) TRV-PASS (Traverse system pass-thru bracket)

**180' System Includes:**

- (4) TRV-S12 (Steel I-beam stanchion)
- (1) Cable assembly with tensioner
- (2) CHL-CEA (Coil energy absorber)
- (2) TRV-PASS (Traverse system pass-thru bracket)

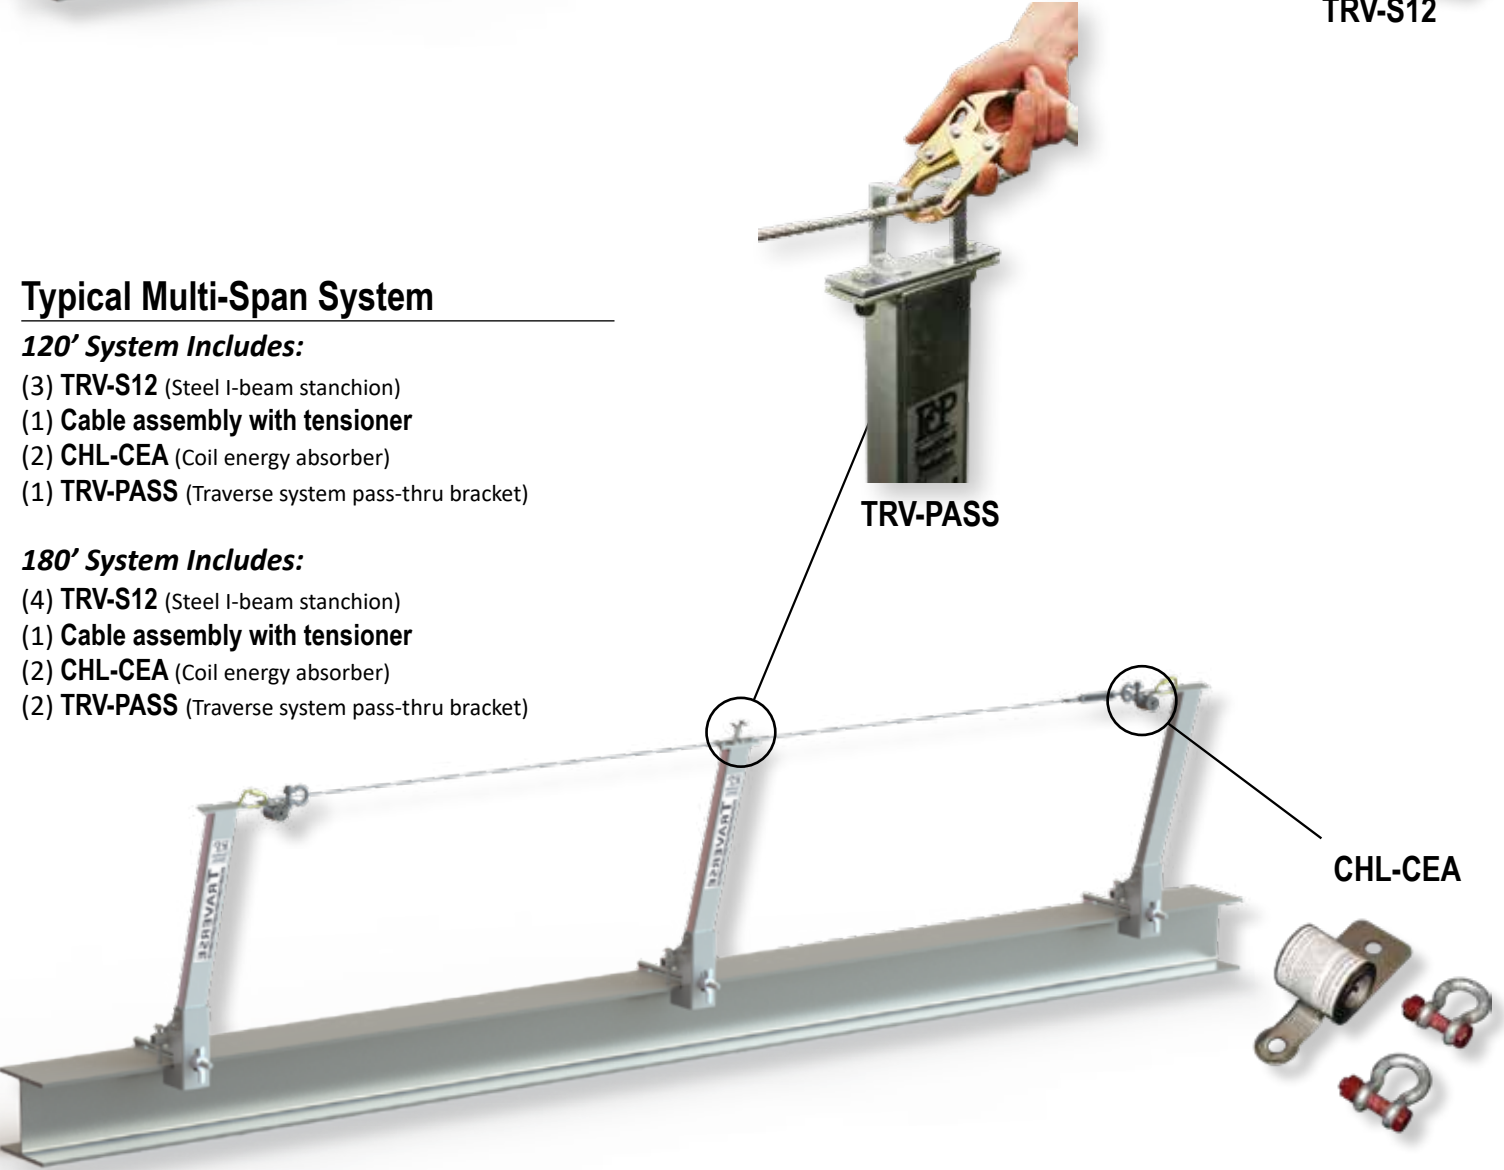

TRV-PASS

CHL-CEA





Also shown:  
STRATOS full body harness  
ROGUE sub-compact SRL

Meets or exceeds OSHA & ANSI requirements

Concrete Base System

The Traverse Series temporary horizontal lifeline offers ideal protection when an overhead anchorage does not exist. Extremely lightweight and portable, this system incorporates a modular multi-base design that accommodates a wide range of steel beams.

- ✔ Lengths available to 10'-240'
- ✔ Fits 1/2" - 1 1/8" diameter rebar (#4-#9) and 6"-12 1/2" center to center
- ✔ Pass-thru adapters allow continuous tie-off and mobility
- ✔ Capacity: 2 users per span, no more than 6 per total system
- ✔ 40" working height (above beam)
- ✔ Weight: 60' system approximately 99.5 lbs.

See page 96 for steel applications

Ordering Options

<b>TRV30C</b> 30' system, (concrete base)	<b>TRV120C</b> 120' system, (concrete base)
<b>TRV60C</b> 60' system, (concrete base)	<b>TRV240C</b> 240' system, (concrete base)

System Components

<b>TRV-C</b> Concrete end stanchion	<b>TRV-TIE</b> Tie-back for concrete system
<b>CHL-CEA</b> Coil energy absorber	<b>TRV-C-PASS</b> Intermediate stanchion & pass-thru
<b>TRV-C-PASSTOP</b> Concrete system pass-thru bracket	


Typical Single Span System

- 30' & 60' Systems Include:
- (2) **TRV-C** (Concrete end stanchion with tie-back)
  - (1) **Cable assembly with tensioner**
  - (1) **CHL-CEA** (Coil energy absorber)



Typical Multi-Span System

- 120' System Includes:
- (2) **TRV-C** (Concrete end stanchion with tie-back)
  - (1) **Cable assembly with tensioner**
  - (2) **CHL-CEA** (Coil energy absorber)
  - (1) **TRV-C-PASS** (Traverse intermediate stanchion & pass thru)
- 180' System Includes:
- (2) **TRV-C** (Concrete end stanchion with tie-back)
  - (1) **Cable assembly with tensioner**
  - (2) **CHL-CEA** (Coil energy absorber)
  - (2) **TRV-C-PASS** (Traverse intermediate stanchion & pass thru)

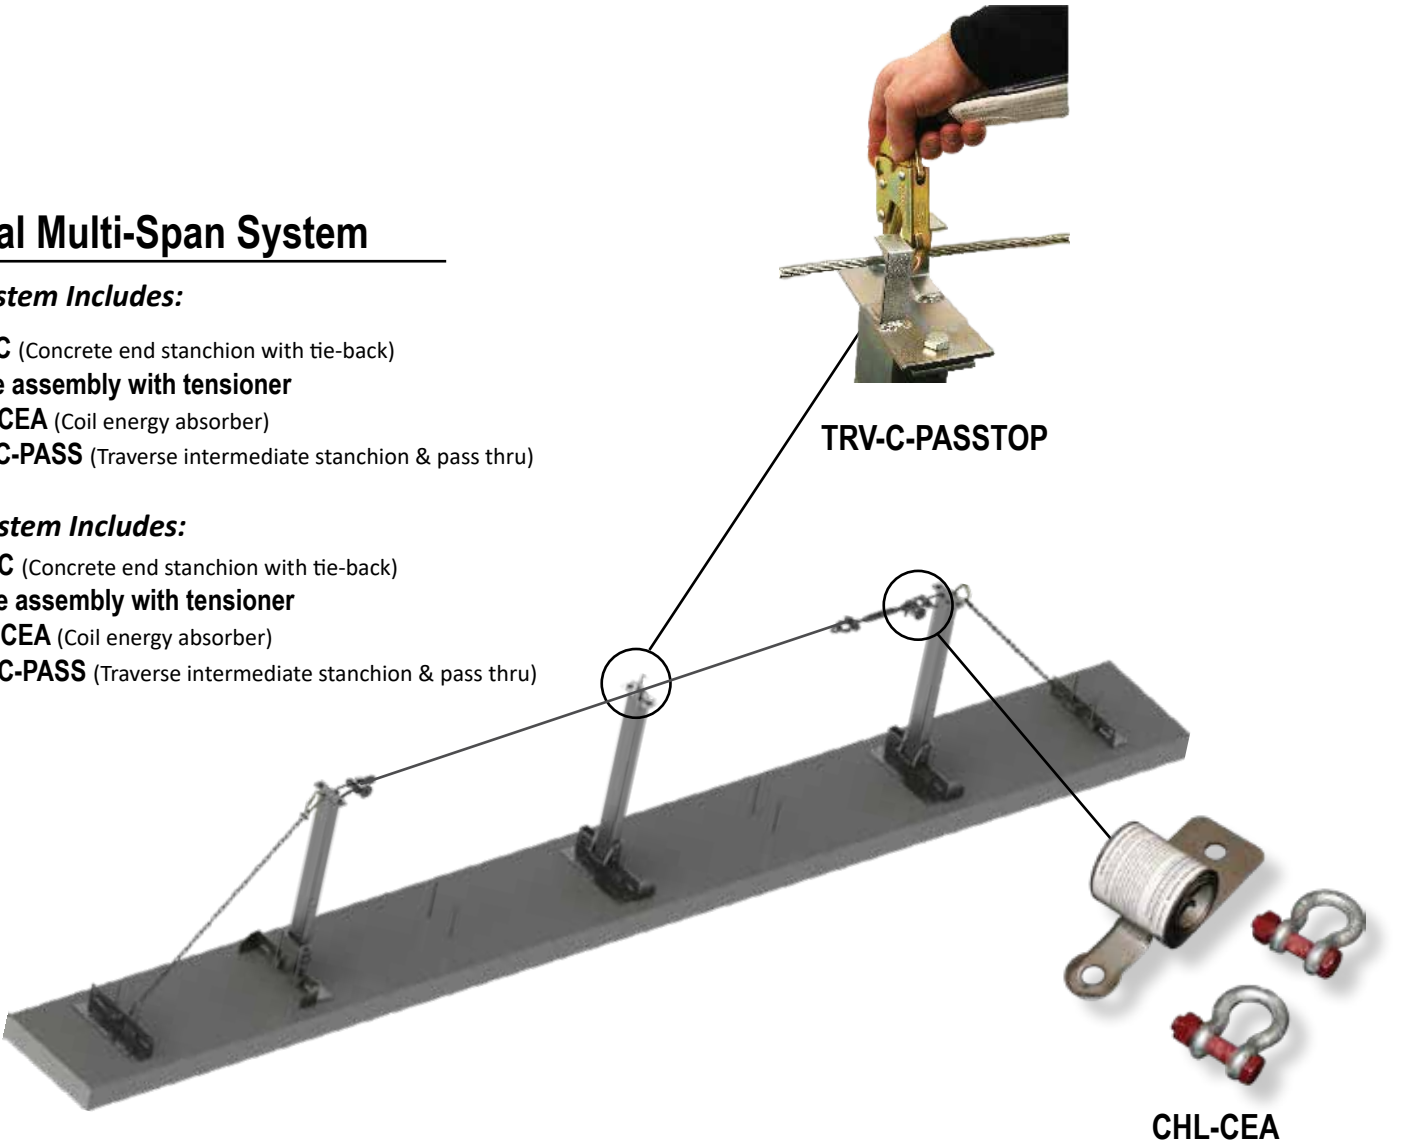





**Miniverse**  
Horizontal Lifeline System

The Miniverse HLL system provides continuous fall protection and can be set up to any cable length with a maximum of 60’ between posts. The stout yet discrete post design allows for permanent installation without the loss of building aesthetics.


- ♥ 12” or 18” working height (measured above working surface)
- ♥ Typical 60’ system weighs approx. 94 lbs.
- ♥ Capacity: 2 users per span, no more than 6 per total system
- ♥ 310 lbs. total each user including tools & equipment
- ♥ Assembled in lengths from 10’-240’ (call for price and lead time)

**Ordering Options**

- TRV-G30**  
30’ system, 1 CHL-CEA  
and connecting fasteners

**TRV-G80**  
80’ system, 2 CHL-CEA  
and connecting fasteners
- TRV-G60**  
60’ system, 1 CHL-CEA  
and connecting fasteners

**TRV-G120**  
120’ system, 2 CHL-CEA  
and connecting fasteners

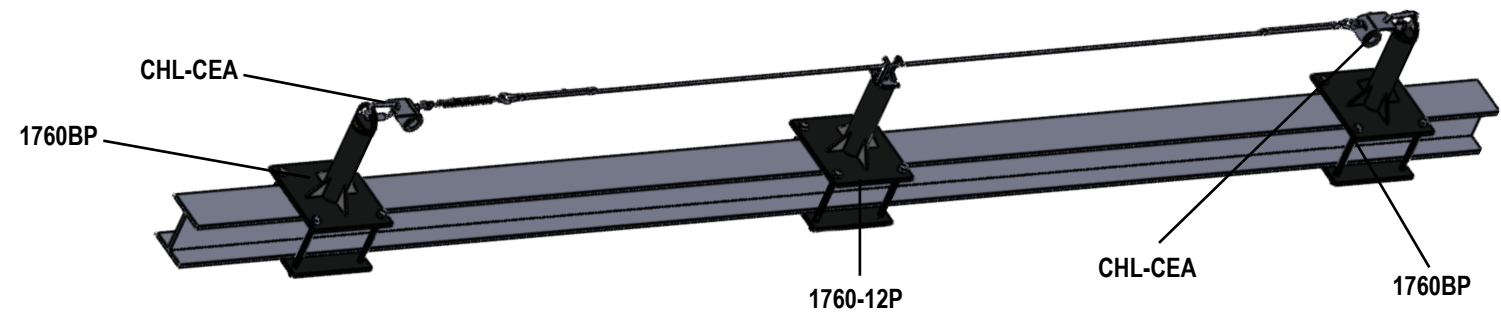

**Horizontal Lifeline**  
Wire Rope Horizontal System

The CHL system is a highly portable lifeline and is ideal in situations such as welding, where sparks or harsh environment are present. The wire rope can be set in place for extended periods of time, or easily transported to a new location. Standard system includes:

- ♥ (1) Wire rope Lifeline assembly with tensioner
- ♥ (2) Sliding tie-off rings
- ♥ (1) Stainless steel coil energy absorber
- ♥ (2) 10’ tie-off anchorage straps

**CHL-30**  
Adjustable system to 30’ in length  
2 workers per span

**CHL-60**  
Adjustable system to 60’ in length  
2 workers per span



**RHLD Horizontal Lifeline**  
Synthetic Rope Horizontal System

Made out of high strength Nerex® rope, the RHLD system boasts an extremely lightweight design which is highly portable and easy to install. Providing safety and reliability, this system is ideal for maintenance, bridgework, construction and general industry applications.

- ♥ (1) Nerex® rope Lifeline assembly with tensioner
- ♥ (2) Sliding tie-off rings
- ♥ (1) Synthetic energy absorber
- ♥ (2) 6’ tie-off anchorage straps

**RHLD-30**  
Adjustable system to 30’ in length  
2 workers per span

**RHLD-60**  
Adjustable system to 60’ in length  
2 workers per span





# LADDER SAFETY SYSTEMS

Shown:  
Rigid Rail System

## Compatible Harnesses For Vertical Climbing Systems

When using a vertical climbing system, FrenchCreek recommends these harnesses when ascending or descending the Rigid Rail or VL cable systems. These harnesses come standard with a waist D-Ring for connection to the system keeping workers within OSHA compliance.

**OSHA 1910.140(d)(1)(iv):** Fall arrest systems must sustain the employee without making contact with the employee's neck and chin area.



**850B-TS**  
6 point adjustment  
Hip Positioning D-Rings  
Waist D-Ring  
Tongue buckle/grommet leg adjustments



**22850B-TS**  
6 point adjustment with comfort waist pad  
Hip Positioning D-Rings  
Waist D-Ring  
Tongue buckle/grommet leg adjustments



**22030B-BLK**  
Navigator Full body harness  
Wide waist belt & lumbar pad  
Comfort air mesh padding  
Several attachment points



VL-38  
Flexible Cable Climbing System

FrenchCreek's VL-38 cable climbing system offers an innovative solution for vertical climbing that is easy to use and requires minimal maintenance. The system's stainless steel construction stands up to the elements for extended periods of time, allowing permanent installation. Standard systems feature:

- ✔ Top & bottom bracket with tensioner
- ✔ Rung clamps for up to 1-1/8" diameter rungs
- ✔ 3/8" galvanized wire-rope Lifeline permanently terminated at one end
- ✔ The appropriate amount of cable guides based on system length

Ordering Options

Final product #'s designated by length. Available in 10' increments from 20'-300'.

VL-38-20  
VL-38 system, 20' in length

VL-38-50  
VL-38 system, 50' in length

VL-38-100  
VL-38 system, 100' in length

VL-38-300  
VL-38 system, 300' in length

System Accessories

1401A-38  
Galvanized steel cable rope grab  
Includes shock absorber & carabiner  
Fits 3/8" and 5/6" wire rope

VL-CG  
Cable guide for VL-38 system  
Fits up to 1-1/8" diameter ladder rung



Typical VL-38 System

20'-300' systems include:

- (1) Top bracket (with hat clamps)
- (1) Bottom bracket (with tensioner)
- (1) C38 wire rope assembly
- VL-CG appropriate amount of cable guides




1401A-38 (Sold separately)  
Stainless steel cable grab  
Includes shock absorber & carabiner  
Fits 3/8" and 5/16" wire rope



VL-CG  
Cable guide for VL-38 system  
Fits up to 1-1/8" diameter ladder rung



Top bracket

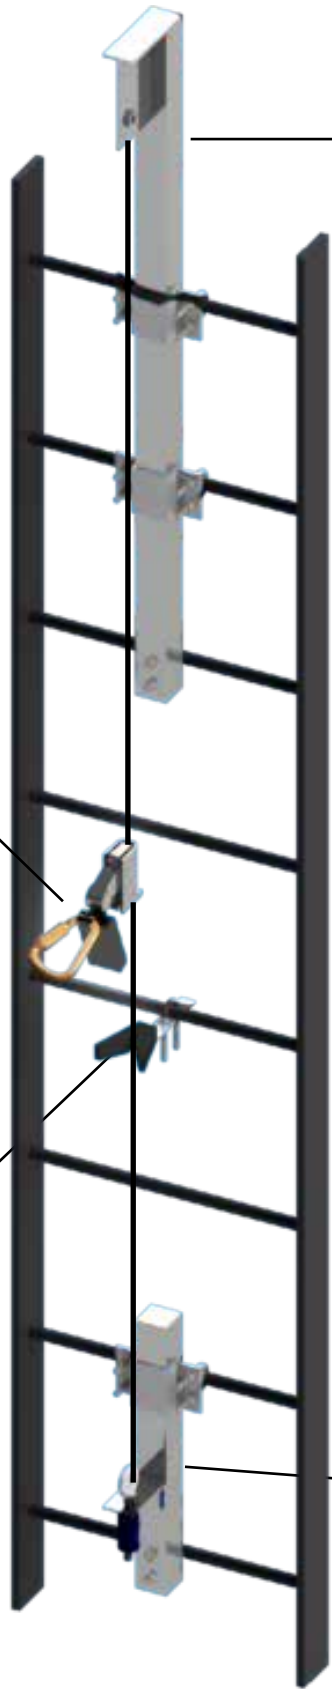

Bottom Bracket & Tensioner



Rigid Rail  
Vertical Climbing System

The rigid rail climbing systems provide maximum climbing safety for workers in virtually any place that climbing must be done. The rail attaches quickly and easily to any ladder step iron or climbing surface. The trolley travels freely and easily along the rail and immediately arrests upon a fall.

When ordering a rigid rail system, you will need to provide rung sizes, shapes, detail or other specifics.

Rail Options

Product length specified by ladder height, please specify upon ordering.

- 1-1100-AR**  
Anodized aluminum rail  
with mounting hardware
- 1-1105-SS**  
316 stainless steel rail  
with mounting hardware

- 1-1100-CR**  
Curved anodized aluminum rail  
with mounting hardware

Curved rail is custom and priced  
per application



Trolley Options

- 2-1200A-AT**  
Climbing trolley for straight vertical  
aluminum rail
- 2-1221A-AT**  
Climbing trolley for curved/straight  
aluminum rail
- 2-1224A-AT**  
Climbing trolley for straight vertical  
stainless steel & aluminum rails
- 2-1223-AT**  
Trolley for horizontal aluminum  
rails

Typical Rigid Rail System


Standard Aluminum System includes:  
(with rung clamps)

- 1-1100-AR** vertical rail (with ladder rung clamps)  
(1) **2-1200A-AT** climbing trolley for aluminum rail

Choose the style of your rung clamp



- 2-1200A-AT**  
Climbing trolley for straight vertical  
aluminum rail  
Includes Carabiner

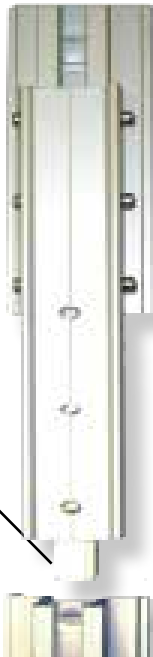

Removable Extension

The removable extension is used to access a permanent rail system/ladder from the top, when a permanent extension is not possible or desirable. The extension is positioned into the existing permanent rail with a machined high-strength alignment bar and support channel.

- 5-1501**  
54" removable aluminum extension rail
- 5-1502B**  
42" removable stainless steel extension rail



LADDER SAFETY SYSTEMS



AP36  
Ladder Anchor Post

- FrenchCreek's AP36 ladder anchor post is a solution to maintaining fall protection on a fixed ladder. This anchor post can be used at the top of a fixed ladder to provide a secure tie-off point when transitioning from the ladder to the elevated level.
- ✔ Compatible with FrenchCreek vertical climbing systems
  - ✔ Can be positioned to the left or right, and in front or behind ladder rungs
  - ✔ Minimal parts & easy setup
  - ✔ Meets and exceeds OSHA 1910.29

AP36  
Ladder anchor post  
U-bolts & mounting hardware



Shown:  
Portable Davit System


CONFINED SPACE SYSTEMS

4-1000  
Ladder Guard System

FrenchCreek ladder guard system is a method of covering an 8' section of a fixed ladder in order to control access. The system comes with the ladder guard as well as all required materials to attach the guard to a fixed ladder.

- ✔ *Standard system includes all hardware necessary to mount ladders 12"-24" wide.*

@ 4-1000  
Complete 8' ladder guard system

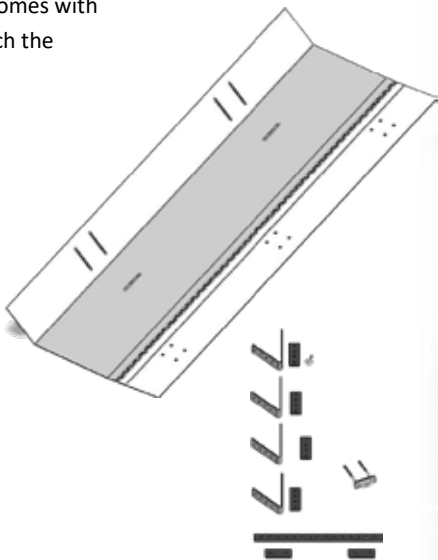



Portable Davit System  
 3-Piece Portable Base- 60" max width


Designed for manholes & other confined spaces where a portable base is needed.

Specs





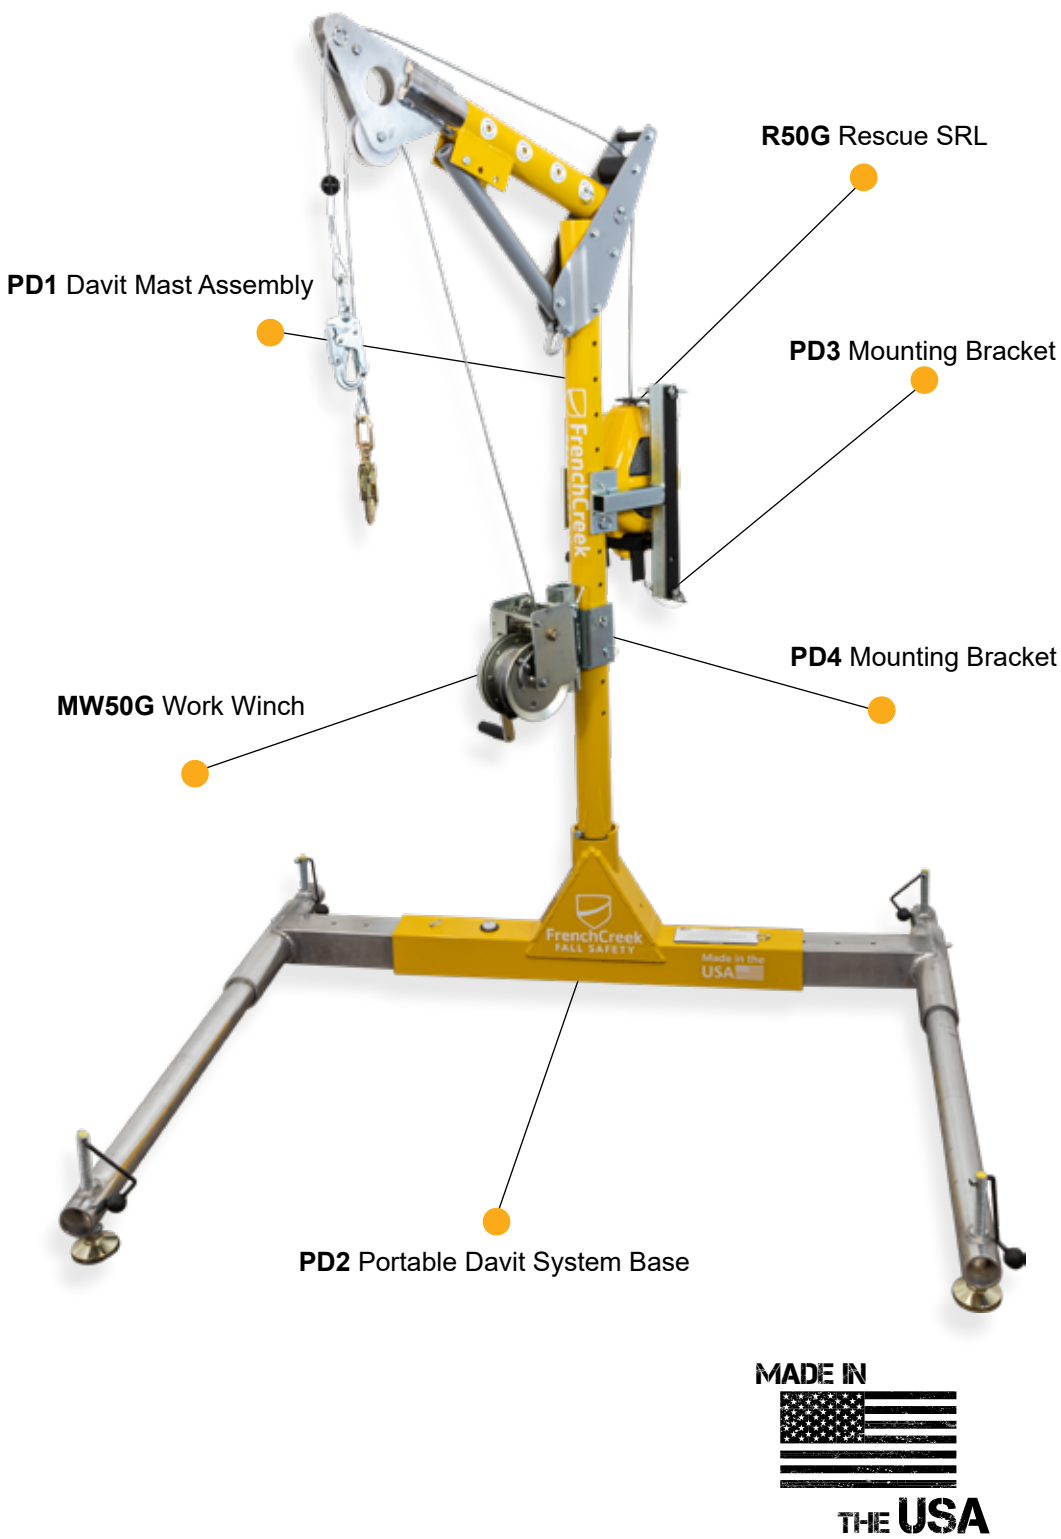

- Weight Capacity- 130-310 lbs ANSI
- Capacity- 1 entrant only, 310 lb. max
- Item weight- 162.75 lbs.
- Hardware Material- Powder coated aluminum, plated alloy steel
- Lifeline- Galvanized steel wire rope
- Standards- OSHA 1926.502  
ANSI 1910.66

Components

- PD1- Davit Mast Assembly
- PD2- Portable Davit Base
- PD3- R50G Mounting Bracket
- PD4- MW50G Mounting Bracket
- R50G- Rescue SRL
- MW50G- Work Winch



Ordering Information

<b>PD1 Davit Mast Assembly</b> 12"-30" offset reach		<b>PD1</b> Davit mast assembly with telescoping adjustability from 12"-30". Includes attachment points for mechanical units. Used in conjunction with FrenchCreek Portable Davit system bases. Item weight 32.75 lbs.
<b>PD2 Portable Davit System Base</b> "36-60" adjustable base width		<b>PD2</b> 3-piece portable davit system base adjusts from 36"-60". For temporary application. Includes bullseye level, tool free height adjustment. Base material: powder-coated aluminum & stainless steel. Item weight 58 lbs.
<b>PD3 Mounting Bracket</b> Attaches R50G Rescue SRL		<b>PD3</b> Used to attach R50G Rescue SRL to PD1 Davit Mast Assembly. Attaches with locking pins. Material: plated alloy steel. Item weight: 7.2 lbs.
<b>PD4 Mounting Bracket</b> Attaches MW50G Work Winch		<b>PD4</b> Used to attach MW50G Work Winch to PD1 Davit Mast Assembly. Attaches with locking pins. Material: plated alloy steel. Item weight: 4.8 lbs.
<b>R50G Rescue SRL</b> ANSI Class SRL-R 3-way unit, 50' length		<b>R50G</b> 50' rescue SRL with raising/lowering capability. Mounts to PD1 Davit Mast Assembly using PD3 Mounting Bracket. Includes dual inertia braking system, pulleys & carabiner, load indicating snaphook. Three lifeline options: galvanized steel, stainless steel, technora rope. Aluminum cast housing. Item weight: 35 lbs.
<b>MW50G Work Winch</b> 50' length		<b>MW50G</b> Offers raising and lowering capabilities with a friction brake that prevents the unit from free-wheeling when under a load. Mounts to PD1 Davit Mast Assembly using PD4 Mounting Bracket. Includes pulleys, carabiner and swivel snaphook. Three lifeline options: galvanized steel, stainless steel, technora rope. Aluminum cast housing. Item weight: 25 lbs.



Portable Davit System  
 Core Mount Sleeve Base- 9" deep sleeve


Ideally suited for recurrent access locations where mast can be easily moved.







Specs

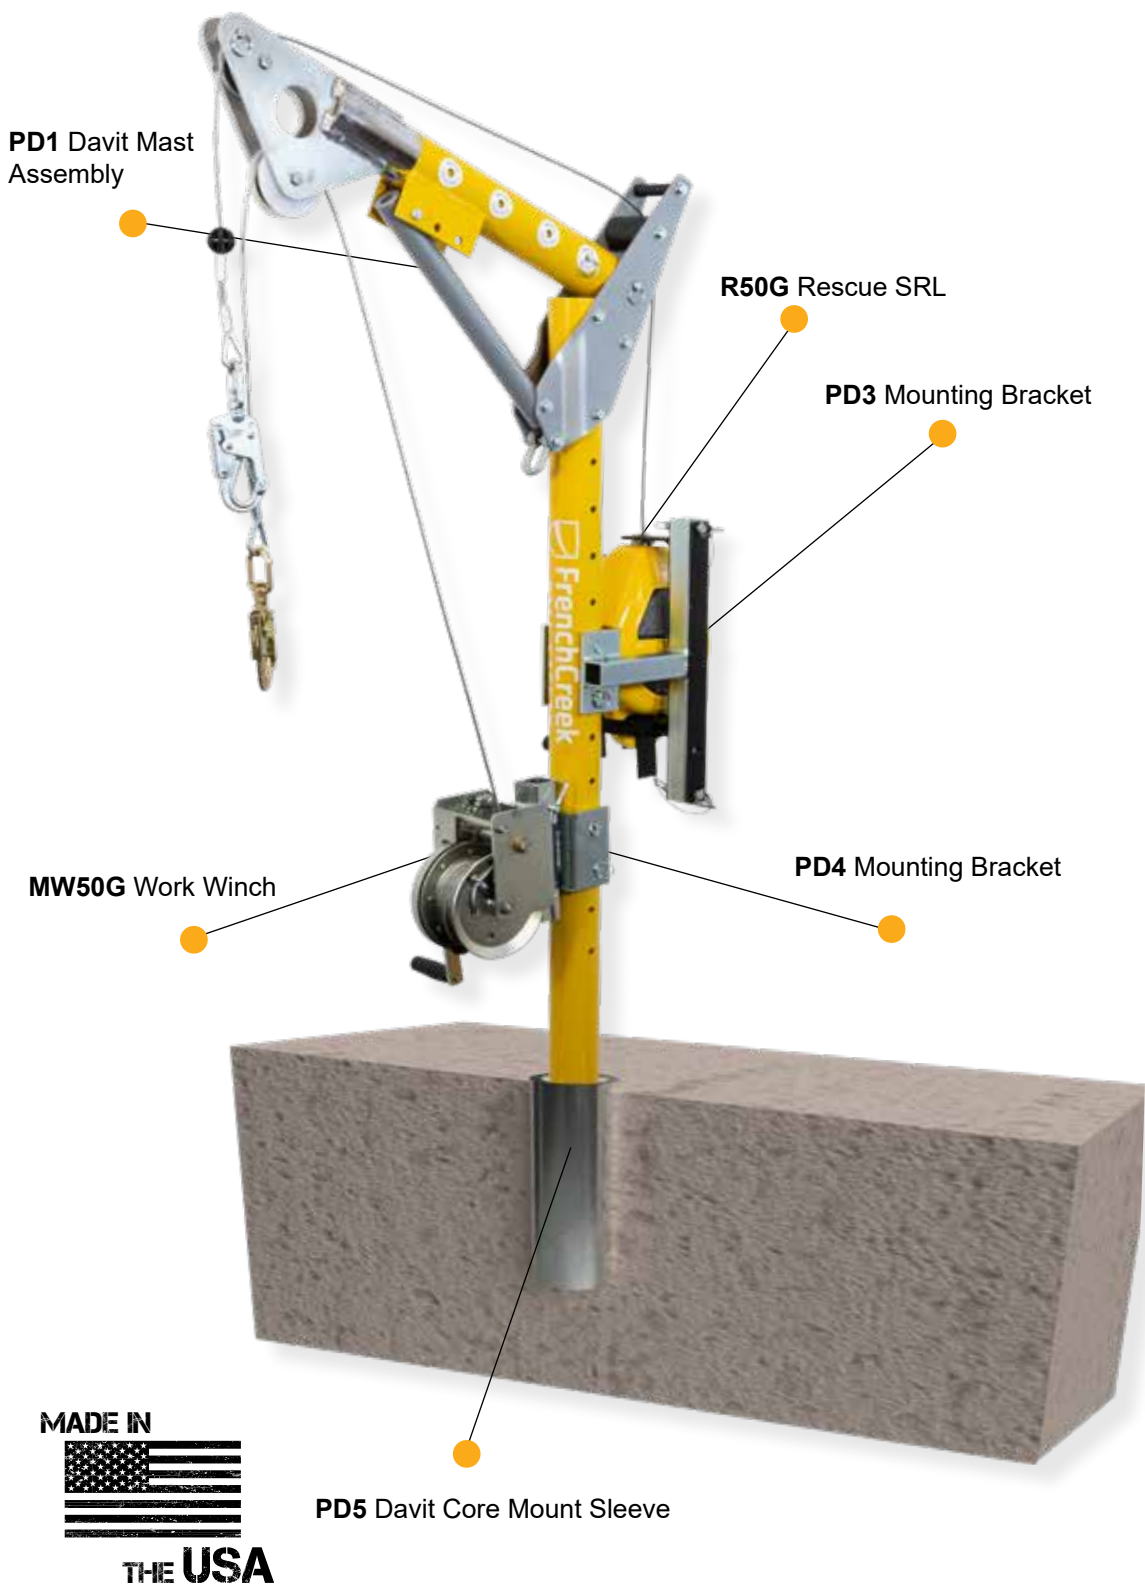- Weight Capacity- 130-310 lbs. ANSI
- Capacity- 1 entrant only, 310 lb. max
- Item weight- 114 lbs.
- Hardware Material- Powder coated aluminum, plated alloy steel
- Lifeline- Galvanized steel wire rope
- Standards- OSHA 1926.502  
ANSI 1910.66

Components

- PD1- Davit Mast Assembly
- PD5- Davit Core Mount Sleeve
- PD3- R50G Mounting Bracket
- PD4- MW50G Mounting Bracket
- R50G- Rescue SRL
- MW50G- Work Winch



Ordering Information		
<b>PD1 Davit Mast Assembly</b> 12"-30" offset reach		<b>PD1</b> Davit mast assembly with telescoping adjustability from 12"-30". Includes attachment points for mechanical units. Used in conjunction with FrenchCreek Portable Davit system bases. Item weight 32.75 lbs.
<b>PD5 Core Mount Sleeve Base</b> Fits 4" (0.10m) diameter core hole		<b>PD5</b> Designed for slip-in installation sleeve fits 4" diameter core hole. Sleeve 9" deep with PVC insert. Allows for 360° rotation of PD1 Davit Mast Assembly. Item weight: 9.7 lbs.
<b>PD3 Mounting Bracket</b> Attaches R50G Rescue SRL		<b>PD3</b> Used to attach R50G Rescue SRL to PD1 Davit Mast Assembly. Attaches with locking pins. Material: plated alloy steel. Item weight: 7.2 lbs.
<b>PD4 Mounting Bracket</b> Attaches MW50G Work Winch		<b>PD4</b> Used to attach MW50G Work Winch to PD1 Davit Mast Assembly. Attaches with locking pins. Material: plated alloy steel. Item weight: 4.8 lbs.
<b>R50G Rescue SRL</b> ANSI Class SRL-R 3-way unit, 50' length		<b>R50G</b> 50' rescue SRL with raising/lowering capability. Mounts to PD1 Davit Mast Assembly using PD3 Mounting Bracket. Includes dual inertia braking system, pulleys & carabiner, load indicating snaphook. Three lifeline options: galvanized steel, stainless steel, technora rope. Aluminum cast housing. Item weight: 35 lbs.
<b>MW50G Work Winch</b> 50' length		<b>MW50G</b> Offers raising and lowering capabilities with a friction brake that prevents the unit from free-wheeling when under a load. Mounts to PD1 Davit Mast Assembly using PD4 Mounting Bracket. Includes pulleys, carabiner and swivel snaphook. Three lifeline options: galvanized steel, stainless steel, technora rope. Aluminum cast housing. Item weight: 25 lbs.



Portable Davit System  
 Floor Mount Cast-In-Place Base- 8"x12" Plate


Ideally suited for high traffic areas to reduce tripping hazards. Cast-in for new concrete construction.

Specs





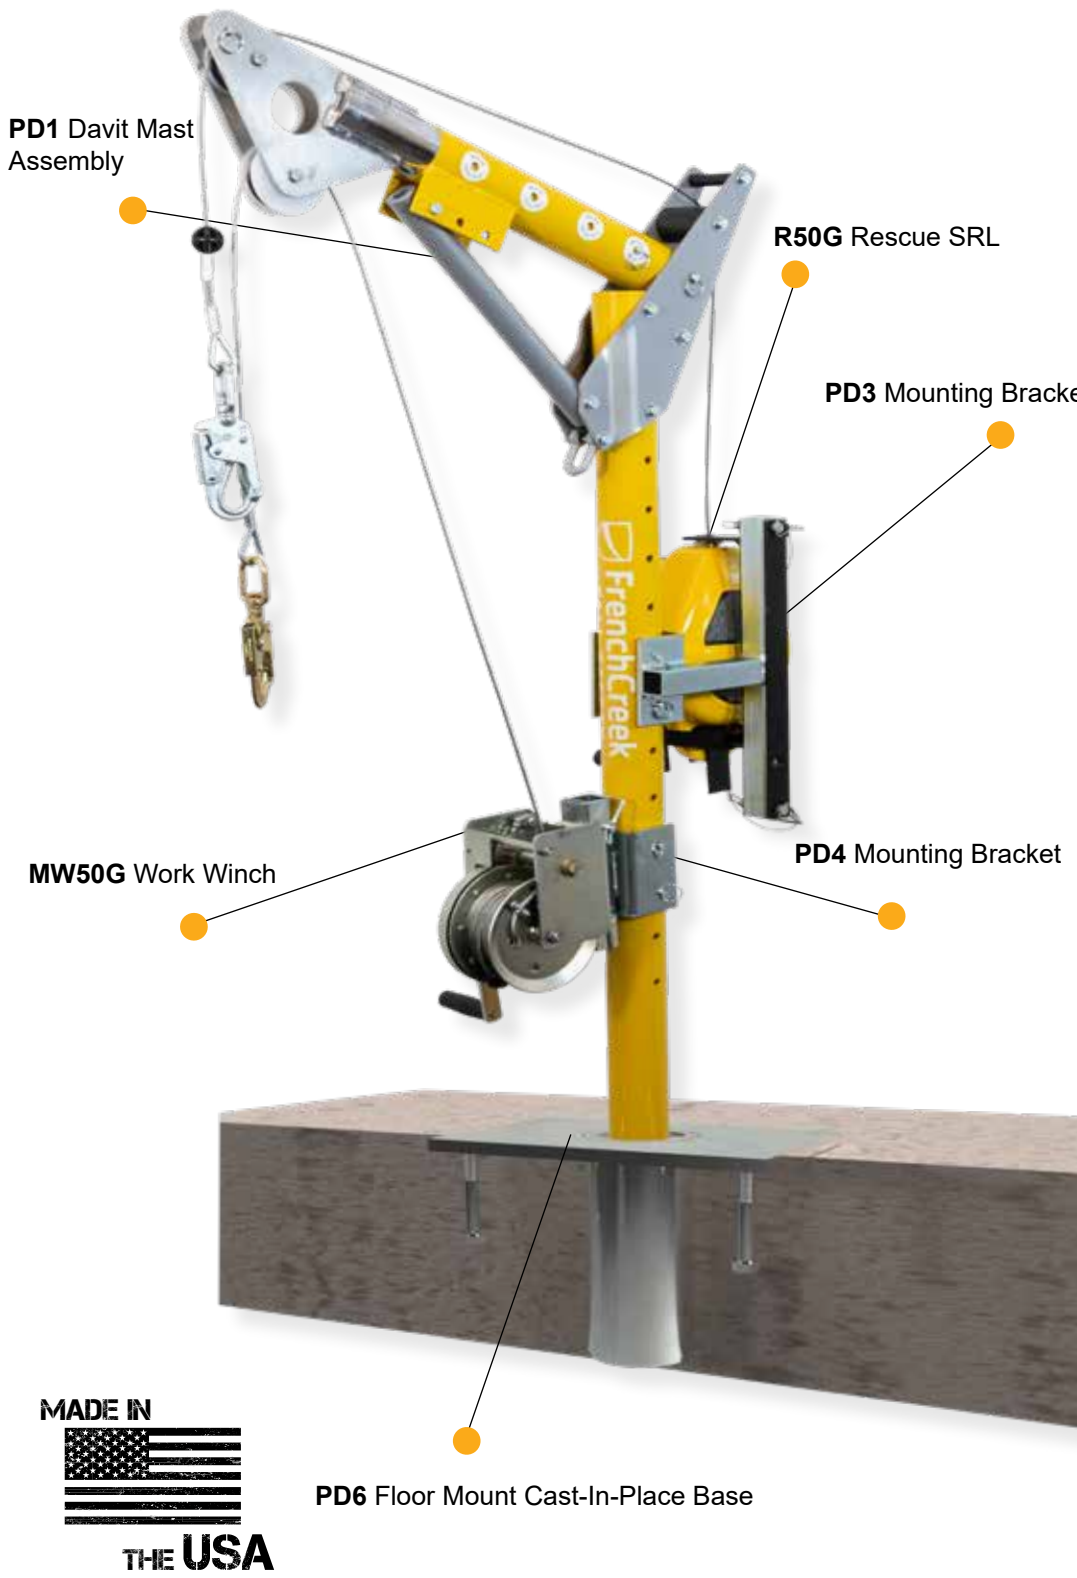

- Weight Capacity- 130-310 lbs. ANSI
- Capacity- 1 entrant only, 310 lb. max
- Item weight- 127 lbs.
- Hardware Material- Powder coated aluminum, plated alloy steel
- Lifeline- Galvanized steel wire rope
- Standards- OSHA 1926.502  
ANSI 1910.66

Components

- PD1- Davit Mast Assembly
- PD6- Floor Mount Cast-In-Place Base
- PD3- R50G Mounting Bracket
- PD4- MW50G Mounting Bracket
- R50G- Rescue SRL
- MW50G- Work Winch



Ordering Information

<b>PD1 Davit Mast Assembly</b> 12"-30" offset reach		<b>PD1</b> Davit mast assembly with telescoping adjustability from 12"-30". Includes attachment points for mechanical units. Used in conjunction with FrenchCreek Portable Davit system bases. Item weight 32.75 lbs.
<b>PD6 Floor Mount Cast-In-Place Base</b> 8"x12" plate with 4" support rods		<b>PD6</b> Cast-in design for new concrete construction installation. Allows for 360° rotation of PD1 Davit Mast Assembly. 9" deep sleeve with PVC insert. Item weight: 22 lbs.
<b>PD3 Mounting Bracket</b> Attaches R50G Rescue SRL		<b>PD3</b> Used to attach R50G Rescue SRL to PD1 Davit Mast Assembly. Attaches with locking pins. Material: plated alloy steel. Item weight: 7.2 lbs.
<b>PD4 Mounting Bracket</b> Attaches MW50G Work Winch		<b>PD4</b> Used to attach MW50G Work Winch to PD1 Davit Mast Assembly. Attaches with locking pins. Material: plated alloy steel. Item weight: 4.8 lbs.
<b>R50G Rescue SRL</b> ANSI Class SRL-R 3-way unit, 50' length		<b>R50G</b> 50' rescue SRL with raising/lowering capability. Mounts to PD1 Davit Mast Assembly using PD3 Mounting Bracket. Includes dual inertia braking system, pulleys & carabiner, load indicating snaphook. Three lifeline options: galvanized steel, stainless steel, technora rope. Aluminum cast housing. Item weight: 35 lbs.
<b>MW50G Work Winch</b> 50' length		<b>MW50G</b> Offers raising and lowering capabilities with a friction brake that prevents the unit from free-wheeling when under a load. Mounts to PD1 Davit Mast Assembly using PD4 Mounting Bracket. Includes pulleys, carabiner and swivel snaphook. Three lifeline options: galvanized steel, stainless steel, technora rope. Aluminum cast housing. Item weight: 25 lbs.



Portable Davit System  
 Floor Mount Sleeve Base- 9" Tall Sleeve Insert


Designed for confined space entry and rescue when recurring access is needed for concrete or structural steel.

Specs







- Weight Capacity- 130-310 lbs. ANSI
- Capacity- 1 entrant only, 310 lb. max
- Item weight- 136.75 lbs.
- Hardware Material- Powder coated aluminum, plated alloy steel
- Lifeline- Galvanized steel wire rope
- Standards- OSHA 1926.502  
ANSI 1910.66

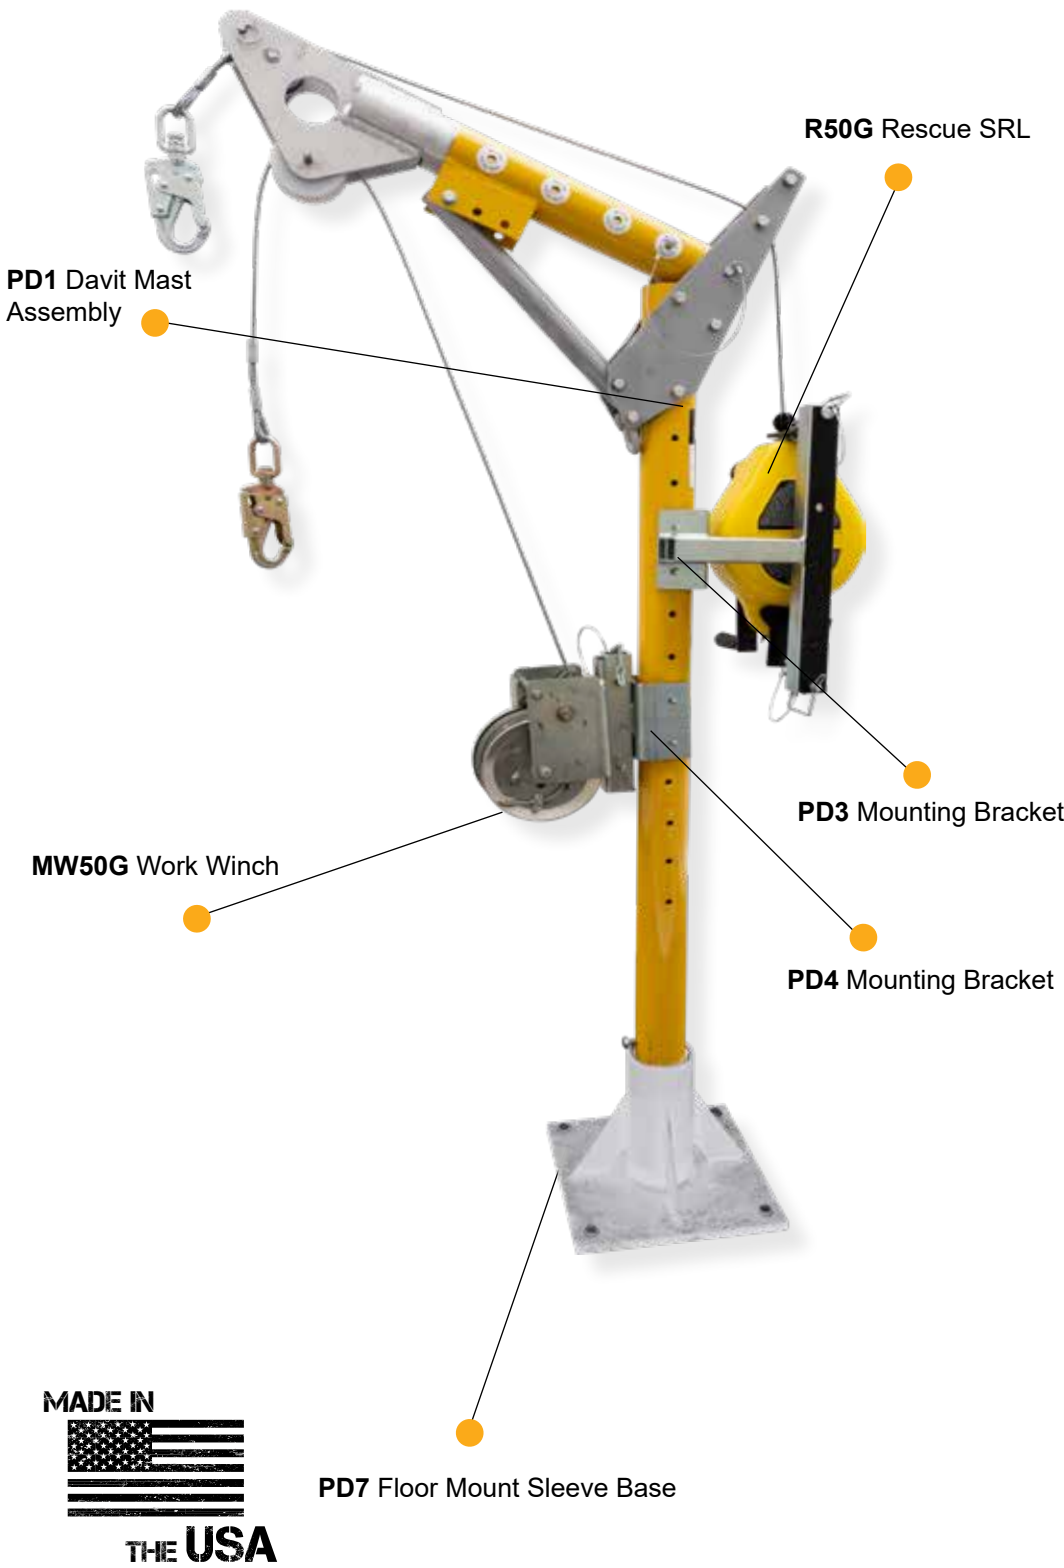Components

- PD1- Davit Mast Assembly
- PD7- Floor Mount Sleeve Base
- PD3- R50G Mounting Bracket
- PD4- MW50G Mounting Bracket
- R50G- Rescue SRL
- MW50G- Work Winch



Ordering Information

<b>PD1 Davit Mast Assembly</b> 12"-30" offset reach		<b>PD1</b> Davit mast assembly with telescoping adjustability from 12"-30". Includes attachment points for mechanical units. Used in conjunction with FrenchCreek Portable Davit system bases. Item weight 32.75 lbs.
<b>PD7 Floor Mount Sleeve Base</b> 9" Deep Sleeve Insert		<b>PD7</b> Bolt on design for existing steel and concrete installation. Allows for 360° rotation of PD1 Davit Mast Assembly. 9" tall sleeve with PVC insert. Item weight: 32 lbs.
<b>PD3 Mounting Bracket</b> Attaches R50G Rescue SRL		<b>PD3</b> Used to attach R50G Rescue SRL to PD1 Davit Mast Assembly. Attaches with locking pins. Material: plated alloy steel. Item weight: 7.2 lbs.
<b>PD4 Mounting Bracket</b> Attaches MW50G Work Winch		<b>PD4</b> Used to attach MW50G Work Winch to PD1 Davit Mast Assembly. Attaches with locking pins. Material: plated alloy steel. Item weight: 4.8 lbs.
<b>R50G Rescue SRL</b> ANSI Class SRL-R 3-way unit, 50' length		<b>R50G</b> 50' rescue SRL with raising/lowering capability. Mounts to PD1 Davit Mast Assembly using PD3 Mounting Bracket. Includes dual inertia braking system, pulleys & carabiner, load indicating snaphook. Three lifeline options: galvanized steel, stainless steel, technora rope. Aluminum cast housing. Item weight: 35 lbs.
<b>MW50G Work Winch</b> 50' length		<b>MW50G</b> Offers raising and lowering capabilities with a friction brake that prevents the unit from free-wheeling when under a load. Mounts to PD1 Davit Mast Assembly using PD4 Mounting Bracket. Includes pulleys, carabiner and swivel snaphook. Three lifeline options: galvanized steel, stainless steel, technora rope. Aluminum cast housing. Item weight: 25 lbs.



Portable Davit System  
 Wall Mount Sleeve Base- 9" Tall Sleeve Insert


Designed for confined space entry and rescue for vertical concrete or steel structures. Can be bolted or welded.

Specs





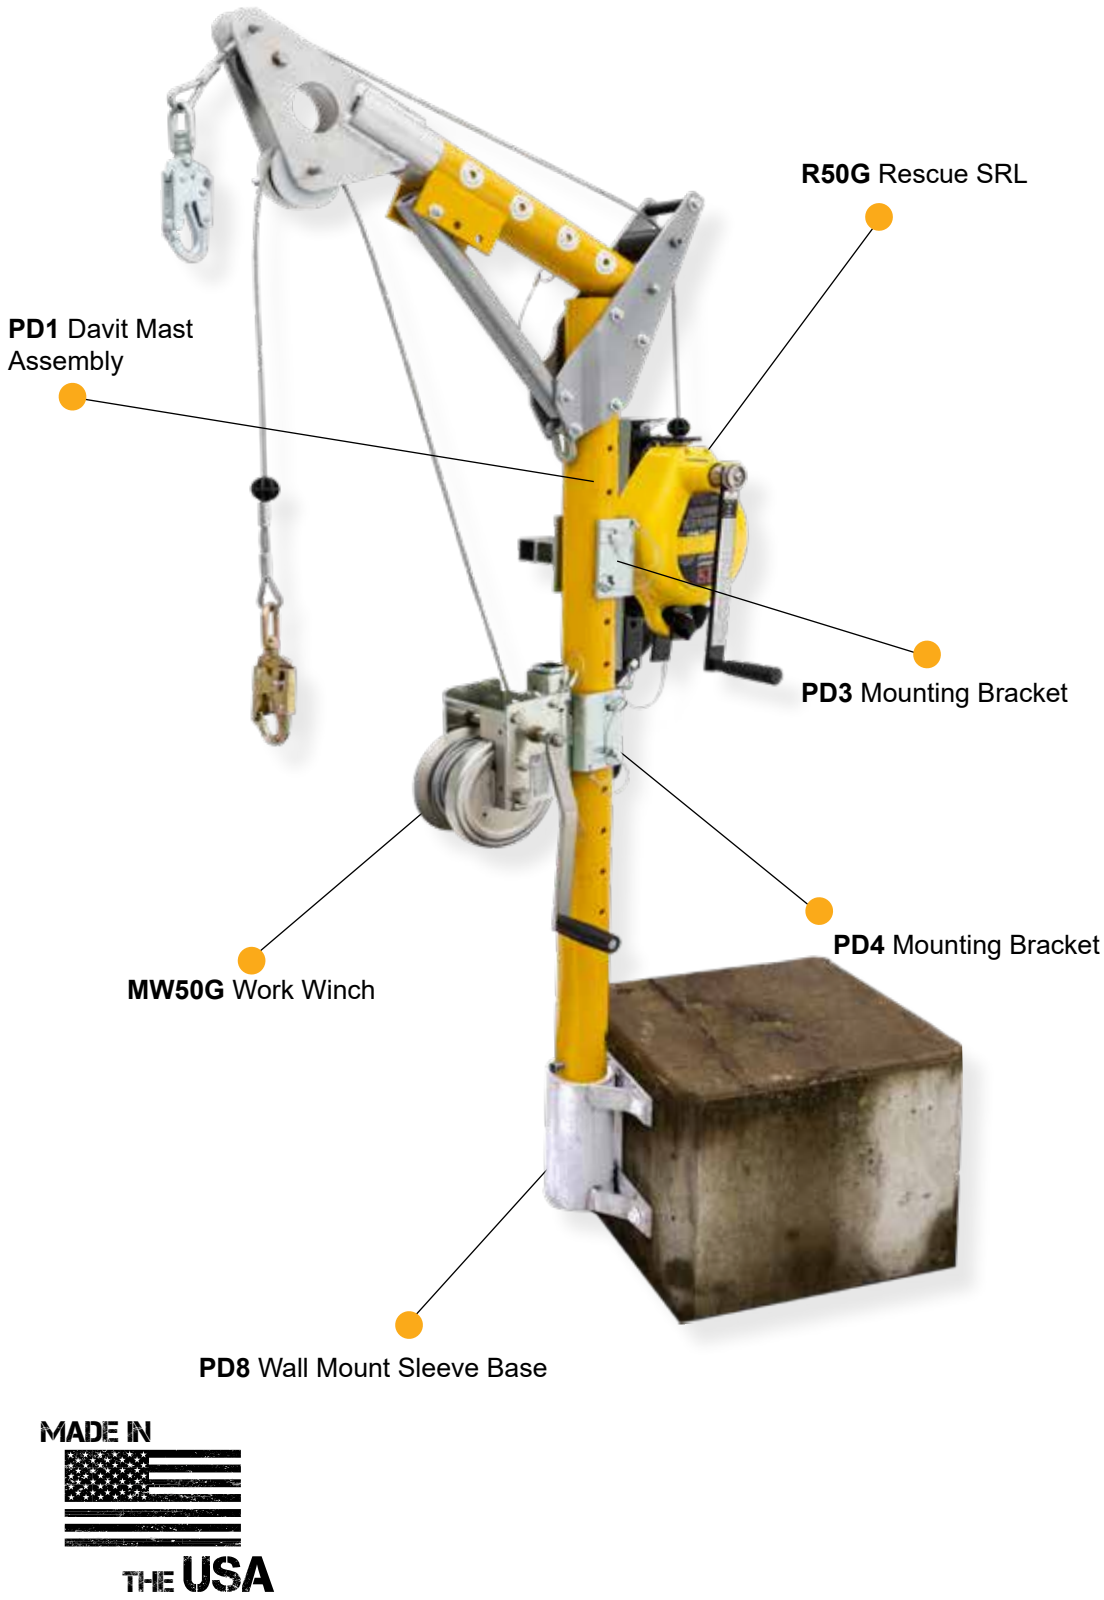

- Weight Capacity- 130-310 lbs. ANSI
- Capacity- 1 entrant only, 310 lb. max
- Item weight- 117.75 lbs.
- Hardware Material- Powder coated aluminum, plated alloy steel
- Lifeline- Galvanized steel wire rope
- Standards- OSHA 1926.502  
ANSI 1910.66

Components

- PD1- Davit Mast Assembly
- PD8- Wall Mount Sleeve
- PD3- R50G Mounting Bracket
- PD4- MW50G Mounting Bracket
- R50G- Rescue SRL
- MW50G- Work Winch



Ordering Information

<b>PD1 Davit Mast Assembly</b> 12"-30" offset reach		<b>PD1</b> Davit mast assembly with telescoping adjustability from 12"-30". Includes attachment points for mechanical units. Used in conjunction with FrenchCreek Portable Davit system bases. Item weight 32.75 lbs.
<b>PD8 Wall Mount Sleeve Base</b> 9" Deep Sleeve Insert		<b>PD8</b> Bolt on design for existing steel and concrete vertical installation. Allows for 360° rotation of PD1 Davit Mast Assembly. 9" tall sleeve with PVC insert. Item weight: 13 lbs.
<b>PD3 Mounting Bracket</b> Attaches R50G Rescue SRL		<b>PD3</b> Used to attach R50G Rescue SRL to PD1 Davit Mast Assembly. Attaches with locking pins. Material: plated alloy steel. Item weight: 7.2 lbs.
<b>PD4 Mounting Bracket</b> Attaches MW50G Work Winch		<b>PD4</b> Used to attach MW50G Work Winch to PD1 Davit Mast Assembly. Attaches with locking pins. Material: plated alloy steel. Item weight: 4.8 lbs.
<b>R50G Rescue SRL</b> ANSI Class SRL-R 3-way unit, 50' length		<b>R50G</b> 50' rescue SRL with raising/lowering capability. Mounts to PD1 Davit Mast Assembly using PD3 Mounting Bracket. Includes dual inertia braking system, pulleys & carabiner, load indicating snaphook. Three lifeline options: galvanized steel, stainless steel, technora rope. Aluminum cast housing. Item weight: 35 lbs.
<b>MW50G Work Winch</b> 50' length		<b>MW50G</b> Offers raising and lowering capabilities with a friction brake that prevents the unit from free-wheeling when under a load. Mounts to PD1 Davit Mast Assembly using PD4 Mounting Bracket. Includes pulleys, carabiner and swivel snaphook. Three lifeline options: galvanized steel, stainless steel, technora rope. Aluminum cast housing. Item weight: 25 lbs.



Portable Davit System  
 Barrel Mount Davit Base- 1/2" to 3-1/2" thick


Designed for bolt on installation to existing edges, walls and other properly rated structures.

Specs





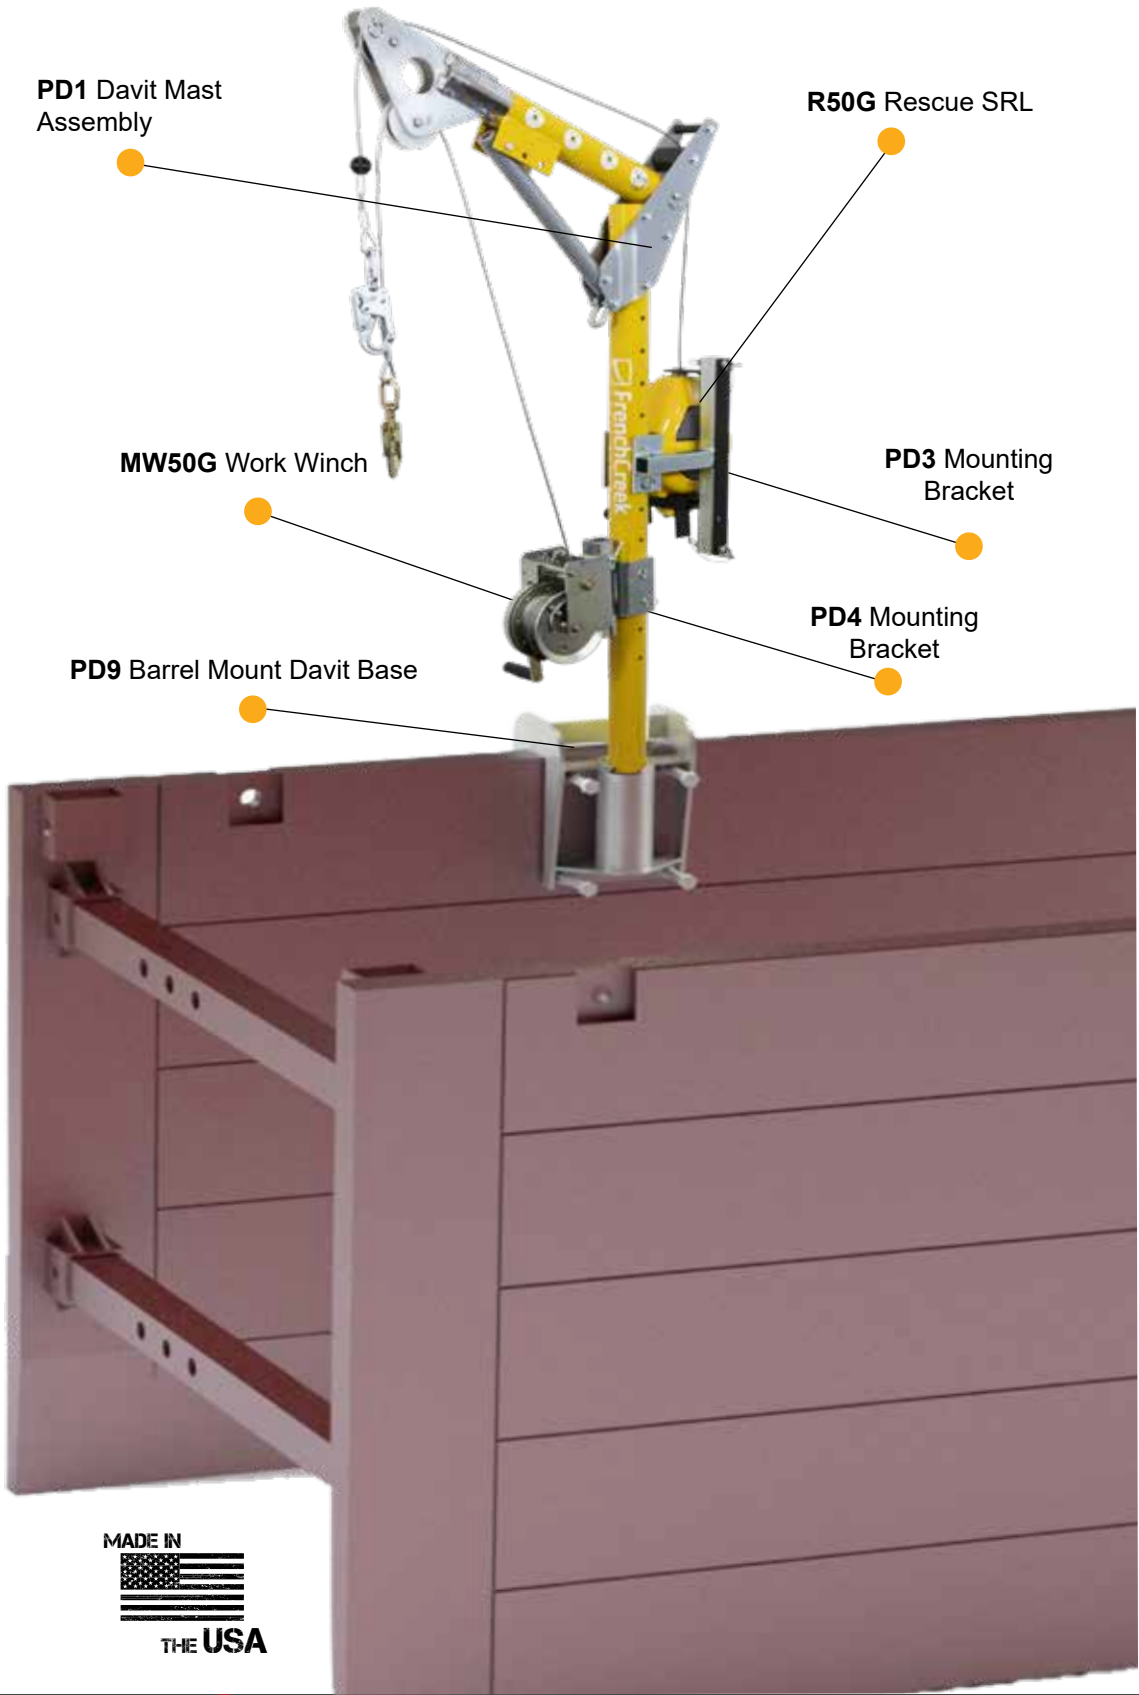

- Weight Capacity- 130-310 lbs. ANSI
- Capacity- 1 entrant only, 310 lb. max
- Item weight- 136.75 lbs.
- Hardware Material- Powder coated aluminum, plated alloy steel
- Lifeline- Galvanized steel wire rope
- Standards- OSHA 1926.502  
ANSI 1910.66

Components

- PD1- Davit Mast Assembly
- PD9- Barrel Mount Davit Base
- PD3- R50G Mounting Bracket
- PD4- MW50G Mounting Bracket
- R50G- Rescue SRL
- MW50G- Work Winch



Ordering Information

<b>PD1 Davit Mast Assembly</b> 12"-30" offset reach		<b>PD1</b> Davit mast assembly with telescoping adjustability from 12"-30". Includes attachment points for mechanical units. Used in conjunction with FrenchCreek Portable Davit system bases. Item weight 32.75 lbs.
<b>PD9 Barrel Mount Davit Base</b> Attaches to <u>properly rated structures</u> 1/2" to 3-1/2" thick.		<b>PD9</b> Attaches to <u>properly rated structures</u> 1/2" to 3-1/2" thick. 4pcs. 3/4" x 5" hex head set screws for securing to structure. Zinc plated welded steel construction with PVC mast sleeve insert. 180° mast rotation. 9" tall sleeve PVC insert. Item weight 32 lbs.
<b>PD3 Mounting Bracket</b> Attaches R50G Rescue SRL		<b>PD3</b> Used to attach R50G Rescue SRL to PD1 Davit Mast Assembly. Attaches with locking pins. Material: plated alloy steel. Item weight: 7.2 lbs.
<b>PD4 Mounting Bracket</b> Attaches MW50G Work Winch		<b>PD4</b> Used to attach MW50G Work Winch to PD1 Davit Mast Assembly. Attaches with locking pins. Material: plated alloy steel. Item weight: 4.8 lbs.
<b>R50G Rescue SRL</b> ANSI Class SRL-R 3-way unit, 50' length		<b>R50G</b> 50' rescue SRL with raising/lowering capability. Mounts to PD1 Davit Mast Assembly using PD3 Mounting Bracket. Includes dual inertia braking system, pulleys & carabiner, load indicating snaphook. Three lifeline options: galvanized steel, stainless steel, technora rope. Aluminum cast housing. Item weight: 35 lbs.
<b>MW50G Work Winch</b> 50' length		<b>MW50G</b> Offers raising and lowering capabilities with a friction brake that prevents the unit from free-wheeling when under a load. Mounts to PD1 Davit Mast Assembly using PD4 Mounting Bracket. Includes pulleys, carabiner and swivel snaphook. Three lifeline options: galvanized steel, stainless steel, technora rope. Aluminum cast housing. Item weight: 25 lbs.



Portable Davit System  
 Hitch Mount System- For Class 3 Minimum Vehicle Trailer Hitch


Designed to be used as a portable anchorage connector. Commonly used with rescue vehicles.

Specs





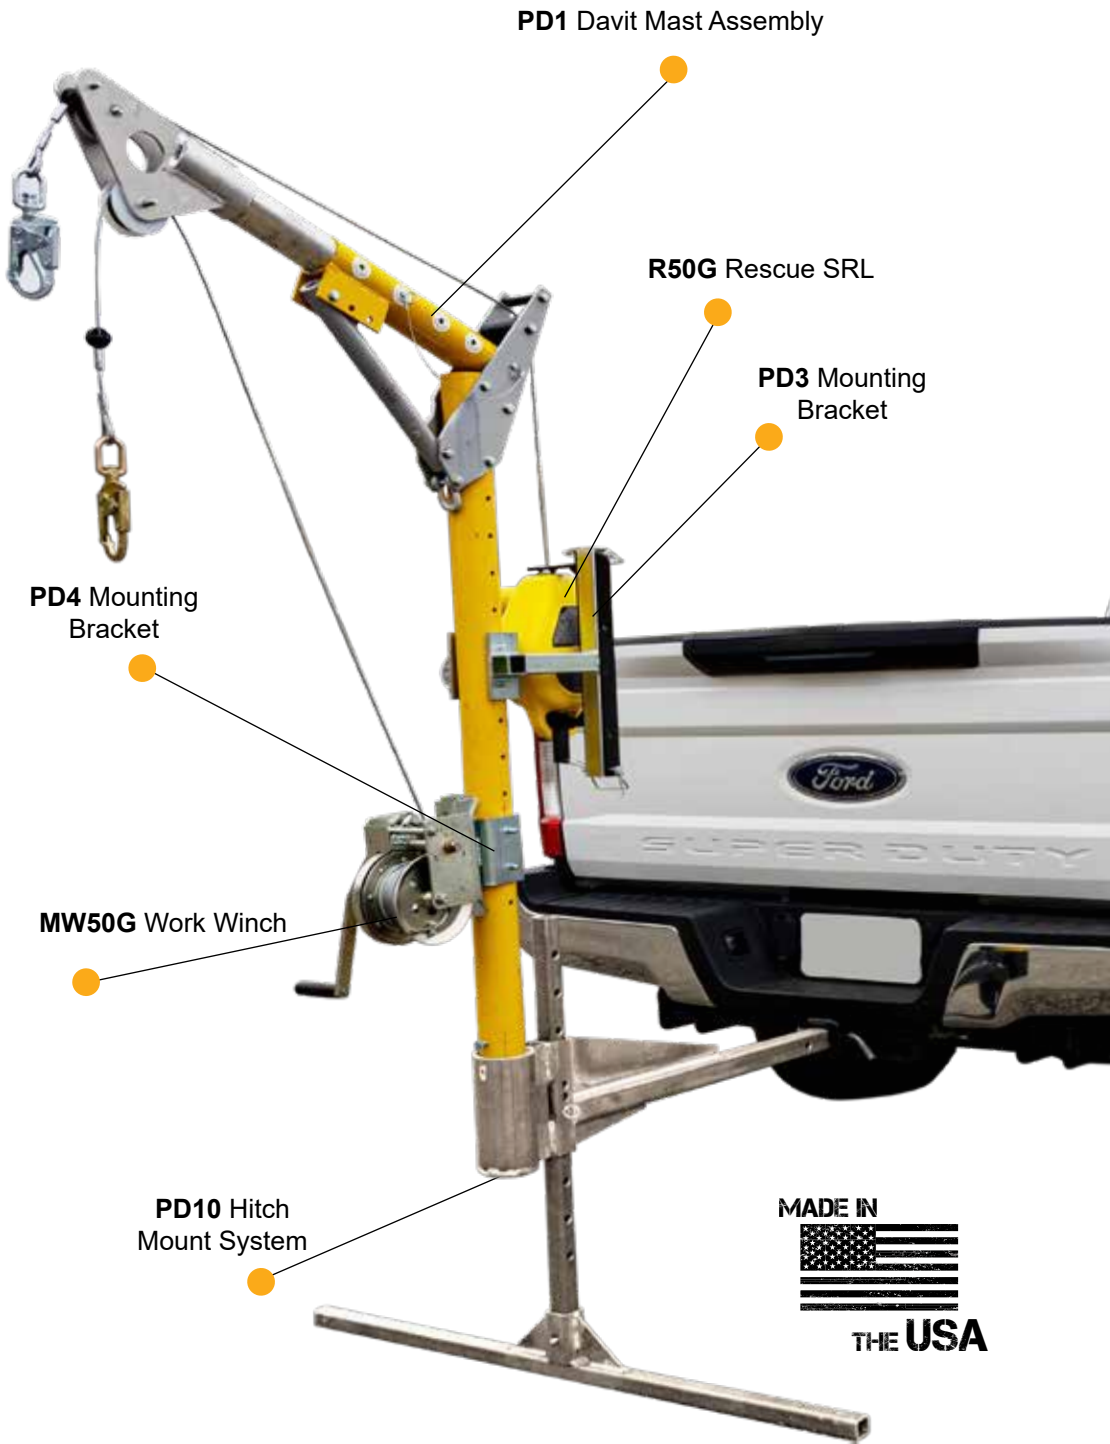

- Weight Capacity- 130-310 lbs. ANSI
- Capacity- 1 entrant only, 310 lb. max
- Item weight- 158.75 lbs.
- Hardware Material- Powder coated aluminum, plated alloy steel
- Lifeline- Galvanized steel wire rope
- Standards- OSHA 1926.502  
ANSI 1910.66

Components

- PD1- Davit Mast Assembly
- PD10- Hitch Mount System
- PD3- R50G Mounting Bracket
- PD4- MW50G Mounting Bracket
- R50G- Rescue SRL
- MW50G- Work Winch



Ordering Information

<b>PD1 Davit Mast Assembly</b> 12"-30" offset reach		<b>PD1</b> Davit mast assembly with telescoping adjustability from 12"-30". Includes attachment points for mechanical units. Used in conjunction with FrenchCreek Portable Davit system bases. Item weight 32.75 lbs.
<b>PD10 Hitch Mount System</b> Installs into class 3 minimum vehicle trailer hitch.		<b>PD10</b> Installs into class 3 minimum vehicle trailer hitch, 2" square receiver. 6"-30" height adjustment range provided in 1" increments. 9" tall plated carbon sleeve with insert. Compatible with PD1 Davit Mast Assembly. Weight 54 lbs.
<b>PD3 Mounting Bracket</b> Attaches R50G Rescue SRL		<b>PD3</b> Used to attach R50G Rescue SRL to PD1 Davit Mast Assembly. Attaches with locking pins. Material: plated alloy steel. Item weight: 7.2 lbs.
<b>PD4 Mounting Bracket</b> Attaches MW50G Work Winch		<b>PD4</b> Used to attach MW50G Work Winch to PD1 Davit Mast Assembly. Attaches with locking pins. Material: plated alloy steel. Item weight: 4.8 lbs.
<b>R50G Rescue SRL</b> ANSI Class SRL-R 3-way unit, 50' length		<b>R50G</b> 50' rescue SRL with raising/lowering capability. Mounts to PD1 Davit Mast Assembly using PD3 Mounting Bracket. Includes dual inertia braking system, pulleys & carabiner, load indicating snaphook. Three lifeline options: galvanized steel, stainless steel, technora rope. Aluminum cast housing. Item weight: 35 lbs.
<b>MW50G Work Winch</b> 50' length		<b>MW50G</b> Offers raising and lowering capabilities with a friction brake that prevents the unit from free-wheeling when under a load. Mounts to PD1 Davit Mast Assembly using PD4 Mounting Bracket. Includes pulleys, carabiner and swivel snaphook. Three lifeline options: galvanized steel, stainless steel, technora rope. Aluminum cast housing. Item weight: 25 lbs.



Tripod  
 Confined Space Systems

The FrenchCreek tripod system incorporates a lightweight design that is capable of withstanding 5,000 lbs. of vertical load, making it easy to transport to those tight confined spaces.

Complete Systems

- S50G-7**  
 TP7 tripod  
 R50G rescue unit

**S50SS-7**  
 TP7 tripod  
 R50SS rescue unit
- R50G-TP7**  
 TP7 tripod  
 R50G rescue unit  
 #204 carry bag

**R50SS-TP7**  
 TP7 tripod  
 R50SS rescue unit  
 #204 carry bag
- S50G-M7**  
 TP7 tripod  
 R50G rescue unit  
 MW50G work winch

**S50SS-M7**  
 TP7 tripod  
 R50SS rescue unit  
 MW50SS work winch

See next page for a complete list of system components



R50 Series  
 3-Way Rescue SRL

The R50 series unit is a Self Retracting lifeline, capable of raising and lowering for rescue and retrieval. Upon a fall, the system can be activated into winch mode, for raising and lowering the worker to safety.

- ✔ Rugged, lightweight aluminum housing
- ✔ Dual internal inertia breaking system
- ✔ Includes pulley & carabiner
- ✔ Load indicating snaphook
- ✔ Three lifeline constituents available, see below

- R50G**  
 50' galvanized wire rope

**R50SS**  
 50' stainless steel wire rope

**R50T**  
 50' Technora® synthetic rope

MW Series  
 Material Winch

The MW series winches offer raising and lowering capabilities with a friction brake that prevents free-wheeling when under a load.

- ✔ Rugged, steel frame drum
- ✔ Three lifeline constituents and lengths available, see below
- ✔ Includes pulley & carabiner
- ✔ Includes swivel snaphook

- MW50G**  
 50' galvanized wire rope

**MW50SS**  
 50' stainless steel wire rope

**MW50T**  
 50' Technora® synthetic rope
- MW100G**  
 100' galvanized wire rope

**MW100SS**  
 100' stainless steel wire rope

**MW100T**  
 100' Technora® synthetic rope

TP7 Series  
 Aluminum Tripods

FrenchCreek confined space tripods are designed to withstand 5,000 lbs. of vertical load, yet are lightweight and portable, offering single person setup that is quick and easy.

- ✔ Adjustable/locking aluminum frame and chain
- ✔ Available in 7' or 9' lengths, see below

- TP7**  
 7' aluminum tripod  
 2 attachment points on head

**TP9**  
 9' aluminum tripod  
 2 attachment points on head







# FALL RESCUE

## Have You Prepared Your Rescue Plan? 3-Way Rescue SRL

Every workplace ought to possess an easily accessible emergency rescue plan. These plans specify roles and procedures that minimize the time required for a rescue operation.



### FALL RESCUE PLAN

Date \_\_\_\_\_ Job Details \_\_\_\_\_

Location \_\_\_\_\_

#### Emergency Contacts

Rescuer \_\_\_\_\_ Rescuer \_\_\_\_\_

Rescuer \_\_\_\_\_ Rescuer \_\_\_\_\_

Competent Person \_\_\_\_\_ Site Supervisor \_\_\_\_\_

#### Rescue Equipment

- |  |   |   |
|--|---|---|
| <input type="checkbox"/> Aerial Lift               | <input type="checkbox"/> Ladder               | <input type="checkbox"/> Rescue Winch     |
| <input type="checkbox"/> Lifting & Lowering Device | <input type="checkbox"/> Life Ring            | <input type="checkbox"/> Rescue Wristlets |
| <input type="checkbox"/> Crane                     | <input type="checkbox"/> Rescue Pole          | <input type="checkbox"/> Scaffold         |
| <input type="checkbox"/> Descent Device            | <input type="checkbox"/> Rescue Rope          | <input type="checkbox"/> System 99        |
| <input type="checkbox"/> First Aid Kit             | <input type="checkbox"/> Rescue SRL's         | <input type="checkbox"/> U-Res-Q          |
| <input type="checkbox"/> AED                       | <input type="checkbox"/> CPR Certified Person |   |

#### Rescue Equipment Location

☐ Jobsite ☐ Gangbox ☐ Toolbox ☐ Other \_\_\_\_\_

#### Rescue Factors

Anchor Point \_\_\_\_\_

Landing Area \_\_\_\_\_

Obstructions & Hazards \_\_\_\_\_

Others \_\_\_\_\_

#### Check Yes If

- ☐ Have alternatives to fall arrest equipment been considered?
- ☐ Is rescue equipment regularly inspected and in good condition?
- ☐ Is the available equipment appropriate for the rescue plan?
- ☐ Are all communication devices identified, located, and tested?
- ☐ Have all rescuers been trained in the use of rescue equipment?
- ☐ If working above water, is a boat available?

Comments \_\_\_\_\_

#### Pre-Work Fall Prevention Tasks: Set up for both fall prevention and fall response

Fall Prevention	Response Procedure
1. _____	1. _____
2. _____	2. _____
3. _____	3. _____
4. _____	4. _____
5. _____	5. _____

s for working at heights.



Scan to  
Download a Rescue Plan!



199D  
Controlled Descent Device

This device can be used in conjunction with a full body harness or work seat along with the appropriate fall arrest system. As the lever on the device is moved, friction on the rope decreases and the device will descend.

- ✔ Used on a single 7/16" (11mm) piece of Kernmantle rope
- ✔ If user lets go of lever or squeezes in a "panic" situation, the device automatically locks and descent is stopped.
- ✔ Device can be inverted to lower an individual in a rescue situation.



199-50

50' rope kit  
(1) #354-4 carabiner  
Carry bag

199-100

100' rope kit  
(1) #354-4 carabiner  
Carry bag

199-200

200' rope kit  
(1) #354-4 carabiner  
Carry bag

WL Series  
Flexible Access Ladder

FrenchCreek flexible access ladders are constructed of high strength webbing and 1 1/4" round fiberglass rungs that are 12" wide. Multiple ladders can be joined together using carabiners, or you can order a longer or custom length.

WL-10

10' flexible web ladder  
Two #354-4 carabiners

WL-30

30' flexible web ladder  
Two #354-4 carabiners

WL-50

50' flexible web ladder  
Two #354-4 carabiners

WL-20


20' flexible web ladder  
Two #354-4 carabiners

WL-40

40' flexible web ladder  
Two #354-4 carabiners

354-2

Twistlock carabiner 1" gate

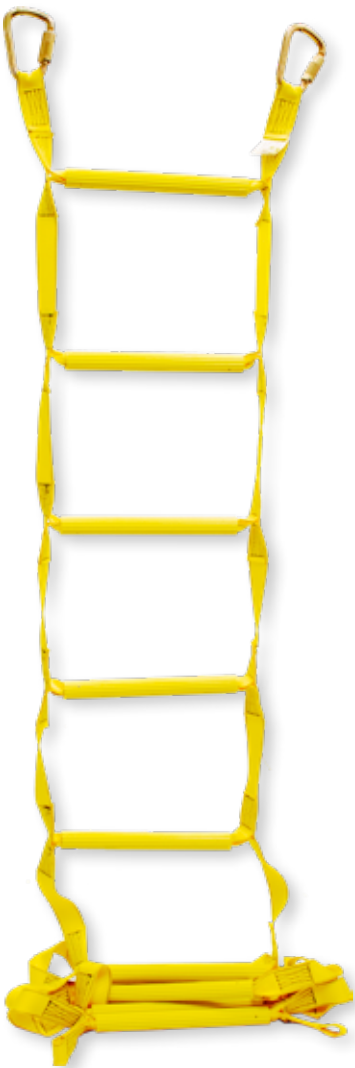

System 99  
Self-Raising/Lowering System

FrenchCreek's system 99 is a versatile lifting and lowering system that can be used for utility/work systems or for rescue & recovery. The lightweight, compact universal system can be set up in seconds and performs a variety of functions.

- ✔ Mechanical advantage of 3:1, makes the system easily operated by one person
- ✔ A top side worker can utilize the system to rescue an incapacitated worker
- ✔ Lightweight design, 200' long system, approx. weight: 52 lbs.

99B-50

50' system

99B-100

100' system

99B-200

200' system





RPR Kits

Remote Prompt Rescue Kits

Time is of the essence in any emergency situation. In an ideal situation, a trained, qualified co-worker can immediately assist another worker in the event of a fall. This system allows a capable worker to attach a raising/ lowering system to the fallen worker's D-Ring, providing a means for rescue.



RPR-25 kit

**RPR-25**  
RPCC-12 rescue pole assembly with bag  
99B 25' System 99 raising/lowering system (page 121)

**RPR-50**  
RPCC-12 rescue pole assembly with bag  
99B 50' System 99 raising/lowering system (page 121)



**RPCC-12**  
6'-12' extendable rescue pole with carabiner holding clip  
354-22 twistlock carabiner (1" gate opening)

Confined Space

Accessories & Items

Additional items to add to your confined space kit.



**204**  
16"X 12" X10"  
Hard bottom winch bag  
Handle & Velcro closure



**354-4**  
Twistlock carabiner  
1" gate opening  
(See page 63)



**354-5**  
Twistlock carabiner  
3/4" gate opening  
(See page 63)



**45**  
Replacement Split Pulley



**206**  
32" X 66" X 7"  
Tripod carrying bag

Rescue Assistance

Accessories

During a confined space rescue there may be no easy way of getting the victim or rescuer out of the confined space. These items can be deployed to aid in rescue.



**207**  
Wristlets (pair)



**207Y**  
Wristlets (pair)  
with yoke



**207YL**  
Wristlets (pair)  
with yoke  
25' tagline



**702Y**  
Web yoke assembly  
with spreader bar





**GR200**  
Portable Guardrail System

Setting up a portable guardrail system is a fundamental of fall prevention when working on open floors and roof tops. FrenchCreek's portable guardrail system provides a secure perimeter and is able to be installed on both a parapet, or on the edge of a concrete slab.

- ✔ Fits 4"-24" parapets and C-slabs
- ✔ Dual-use versatility for slab edge and parapet installations
- ✔ Secures with adjustable clamp lever
- ✔ Plated alloy steel provides corrosion and damage resistance
- ✔ Lightweight, one person setup & installation



**PacMule Firefighter Belt**  
Designed for Firefighters Only!

The lightweight series of fireman's belts integrates 1 3/4" webbing rated at 10,000 lbs. Specially designed by firefighters, for firefighters.

- ✔ 4" Coolmax-Lined comfort pad with 3M Scotchlite reflective material
- ✔ Patented drop-down tool D-Rings with snap closures
- ✔ Forged front bailout ring, and choice of quick release front snap
- ✔ Exceeds NFPA standards for escape belts
- ✔ **Sizes available: S,M,L,XL,XXL (use NFPA size chart)**



QN4107FB

**QN4107FB**  
Adjustable quick-clip escape waist-belt  
2" forged front bailout D-Ring  
(2) 2" drop-down tool D-Rings

**QN4105FB**  
Adjustable quick-clip escape waist-belt  
2" forged front bailout D-Ring  
(2) 3" drop-down tool D-Rings



QL4107FB-18

**QL4107FB-18**  
Adjustable quick-clip escape waist-belt  
1 3/4" forged front bailout D-Ring  
18" tie-off lanyard with 1 7/8" carabiner  
(2) 3" drop-down tool D-Rings

**QL4109FB-18**  
Adjustable quick-clip escape waist-belt  
1 3/4" forged front bailout D-Ring  
18" tie-off lanyard with 1 7/8" carabiner  
(1) 3" drop-down tool D-Ring  
(1) 2" drop-down tool D-Ring



GL 4107FB-18

**GL4107FB-18**  
Adjustable Tongue & Grommet escape waist-belt  
1 3/4" forged front bailout D-Ring  
18" tie-off lanyard with 1 7/8" carabiner  
(2) 3" drop-down tool D-Rings

**GL4109FB-18**  
Adjustable Tongue & Grommet escape waist-belt  
1 3/4" forged front bailout D-Ring  
18" tie-off lanyard with 1 7/8" carabiner  
(1) 3" drop-down tool D-Ring  
(1) 2" drop-down tool D-Ring



CARRY BAGS

Carry Bags & Pouches  
Bags Made in the USA

FrenchCreek offers a wide range of carry and tool bags, from small utility bags for carrying safety glasses or respirators, to larger bags to help transport fall arrest or confined space equipment.

Need a custom bag?

*If you require a specific size bag, we may be able to manufacture exactly what you need. We also offer personalized silk-screening allowing you to brand your bag with your company's logo.*



**203**  
17"X 8.5"X 8.5" carry bag  
Handle & zipper closure



**204**  
16"X 12"X 10" hard bottom carry bag  
Handle & Velcro closure



**206**  
32" X 66" X 7' tripod carry bag

**206-9**  
32" X 66" X 9' tripod carry bag



**208**  
8.5" X 12"h drawstring bag

**208-1**  
8.5" X 14"h drawstring bag



**208Z**  
19" X 9"X 9" carry bag  
Handle & zipper closure



**211**  
5"X 3"x 9" lanyard pouch  
with tool belt loops

MADE IN THE USA

FrenchCreek Fall Safety is settled right on the banks of our namesake, the historical waterway FrenchCreek. Named by George Washington during the French and Indian War, this nationally renowned waterway begins in Chautauqua County, western New York, and flows for 117 miles through the northwestern Pennsylvania counties of Erie, Crawford, Mercer, and Venango Counties until it empties into the Allegheny river at Franklin, Pennsylvania.

CUSTOMER SERVICE

When you contact us, no matter what your needs are, you won't have to deal with irritating automated menus. Our team of industry experts will be ready to assist you with all your questions about fall protection and safety.

Call us today at: 877.228.9327

AMERICAN MANUFACTURING

In 1992, when FrenchCreek was established, our primary commitment was to make American manufacturing the foundation of the company's growth and achievement in producing high-quality fall arrest and rescue systems. Today, despite FrenchCreek's move to a significantly larger headquarters, the design, testing, and manufacturing operations continue to proudly take place in Franklin, Pennsylvania. Our ISO-accredited laboratory conducts tests on all products during the development phase and maintains ongoing compliance testing for existing products.



Visit FrenchCreek Fall Safety on Youtube

For product content and tutorials.



MADE IN



THE USA



# FrenchCreek

## FALL SAFETY

[fcsafety.com](https://fcsafety.com)

©2023 FrenchCreek Production Inc.  
100 N. 13th St.  
Franklin, PA 16323

*Please call to locate your nearest distributor*

**877.228.9327**

**814.437.1808**

Tools shown not included.

Product descriptions and specifications  
herein may change without notice.

CAT2024



*Proud Member of:*

