



PRODUCT SPECIFICATIONS


450A-62A Shock Absorbing Web Lanyard

Product Description:

This web lanyard with pack style shock absorber limits fall arrest forces to 900 lbs. when tested to OSHA and ANSI standards. Features a standard snap hook on harness connection end and large aluminum carabiner on anchor end.

Product Features:

- 1" synthetic webbing with shock pack
- Standard length 6', additional lengths available
- Additional snaphook options available

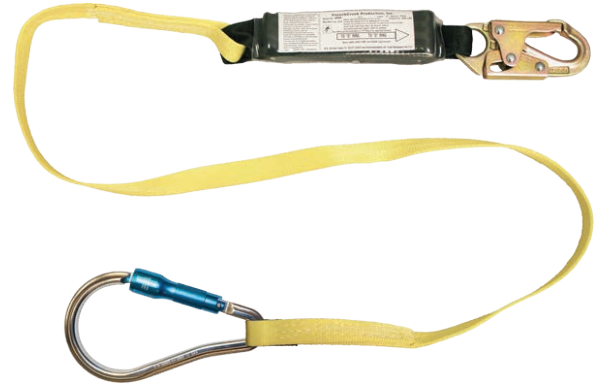

MATERIAL SPECIFICATIONS

Webbing	Yellow 1" nylon, tensile strength 6,000 lbs.
	1-3/4" black polyester, minimum tensile strength 6,000 lbs
	1-3/4" polyester tear-away
Hardware	#Z74 snap-hook: 3/4" gate opening, zinc plated steel
	100% proof loaded to 3,600 lbs min. tensile strength of 6,000 lbs
	#62A carabiner: 2" gate opening aluminum
	100% proof loaded to 3,600 lbs, min tensile strength 5,000 lbs
Thread	Polyester nubond

PERFORMANCE SPECIFICATIONS

ANSI User Capacity	130-310 lbs. Max
OSHA User Capacity	400 lbs. Max
Arrest Force	900 lbs
Lanyard Class	6' Free Fall

RELEVANT STANDARDS

ANSI	ANSI Z359.13-2013
OSHA	Meets or exceeds all OSHA requirements

SIZES/LENGTHS

Standard length 6' additional sizes available.
Item weight 2.1 lbs