



PRODUCT SPECIFICATIONS


454A Shock Absorbing Web Lanyard

Product Description:

This web lanyard with pack style shock absorber limits fall arrest forces to 900 lbs. when tested to OSHA and ANSI standards.

Product Features:

- 1" nylon webbing with shock pack
- Standard length of 6'
- Additional snaphook options available

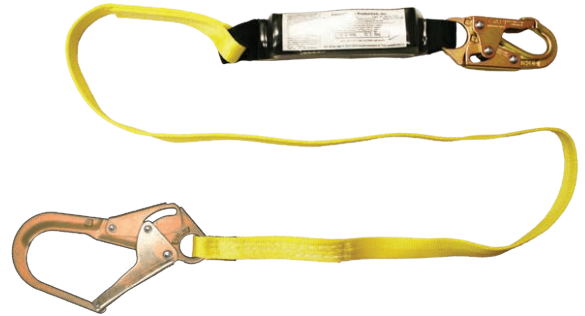

MATERIAL SPECIFICATIONS

Hardware	Z74 Snap hook: 3/4" gate opening plated alloy steel
	100% Proof loaded to 3,600 lbs min. tensile 5,000 lbs
	100% Gate loaded to 3,600 lbs
	Z136 Locking snap hook, 2-1/2" gate opening plated alloy steel
	100% Proof loaded to 3,600 lbs min. tensile 5,000 lbs
Webbing	1" Yellow nylon webbing minimum tensile strength 6,000 lbs.
	1-3/4" Black polyester, minimum tensile strength 6,000 lbs.
	1-3/4" Tear-away
Thread	Polyester nubond

PERFORMANCE SPECIFICATIONS

ANSI User Capacity	130-310 lbs. Max
OSHA User Capacity	400 lbs. Max
Arrest Force	900 lbs
Lanyard Class	6' Free Fall

RELEVANT STANDARDS

ANSI	ANSI Z359.13-2013
OSHA	Meets or exceeds all OSHA requirements

SIZES/LENGTHS

Standard length 6' additional sizes available.
Item weight 2.74 lbs