




**FrenchCreek**  
FALL SAFETY



2026  
FULL LINE PRODUCT CATALOG



[fcsafety.com](https://fcsafety.com)

# TABLE OF CONTENTS



Full Body Harnesses Pages 8-39

Self-Retracting Lifelines Pages 40-48

Confined Space Systems Pages 49-67

Rescue Pages 68-71

Ladder Safety Systems Pages 72-79

Safety Lanyards Pages 80-95


Anchorage Connectors Pages 96-104

Roofing Safety Pages 105-111

Horizontal Lifeline Systems Pages 112-117

Guardrail System Page 118

Firefighter Belts Page 119



This catalog does not include our full product line. To explore our complete selection, visit [fcsafety.com](http://fcsafety.com).

# WHAT'S NEW?

CHECK OUT THE LATEST RELEASES FROM FRENCHCREEK



## STRATOS 22AL Series

The Stratos is now lighter & stronger than ever.

Page: 13



## Rope Positioning Lanyards

New rope positioning lanyards with mechanical ascenders now available.

Page: 91



## Trench-Box Mount Davit Base

A new trench-box mount davit base for thicker walled boxes now available

Page: 64-65



# THE INDUSTRIES WE SERVE

## CONSTRUCTION




The construction industry plays a significant role in the U.S. economy, employing over 7 million individuals and contributing to the creation of structures worth nearly \$1.4 trillion annually. Unfortunately, falls remain the primary cause of fatalities in this sector. Employers are obligated to supply their workers with appropriate fall protection gear and offer them comprehensive training on its proper usage. The removal of fall hazards from elevated work platforms, raised workstations, and openings in floors and walls is essential for ensuring a secure construction site.

## MUNICIPAL WASTEWATER



Not every fall hazard has to be at 300 feet in the air. Local workers servicing a public drainage system or wastewater treatment plant require specific fall protection systems for entering manholes, tanks, and other confined spaces. According to the U.S. Bureau of Labor Statistics from 2011-2018, 1,030 workers died of injuries involving a confined space. It is vital that workers are trained in rescue for these dangerous applications.

## STEEL ERECTION



The cities of America were built by the early pioneers of steel erection. We have all seen the photos of men leisurely enjoying lunch on a steel I-beam hundreds of stories above the New York City skyline. Thankfully, long-gone are the days of walking untethered above the world's tallest buildings. However, fall protection hazards still exist in this extreme profession. According to the U.S. Bureau of Labor Statistics Ironworkers have the fifth highest fatality rate (33.4 per 100,000 workers) of any United States civilian worker classification.

## TOWER CLIMBING WIND ENERGY



As technology advances into the modern area so does the need for skilled workers to climb new cellphone/communication towers, and wind turbines. Among the industries where workers are falling to their death, tower climbers have experienced fatality rates up to 10 times higher than construction workers. In recent years, new ladder safety devices have been implemented and regulated by OSHA to keep workers safe while climbing a fixed ladder.





# GET BACK TO THE BASICS

Make sure you and your team know the basics of fall protection before heading to the jobsite. *It is as easy as ABC.*

## A ANCHORAGE



A 1702 Steel I-Beam Anchor

The anchorage is the secure point of the attachment for the fall-arrest system. The appropriate type of anchor varies by industry needs and the application. Anchors may be temporary or permanent.

## B BODY SUPPORT



B 22AL870B-BLUE Stratos Full Body Harness

Full body harnesses provide a connection point to the fall arrest system. Harnesses are designed to protect workers in the event of a fall by evenly distributing fall arrest forces over your upper thighs, pelvis, chest and shoulders.


## C CONNECTING DEVICE



C M2RG-4Z Rogue Self-Retracting Lifeline

Ties your full body harness to the anchorage point. Commonly used connecting devices include shock absorbing lanyards and self-retracting devices (SRD's).

## D DESCENT/RESCUE

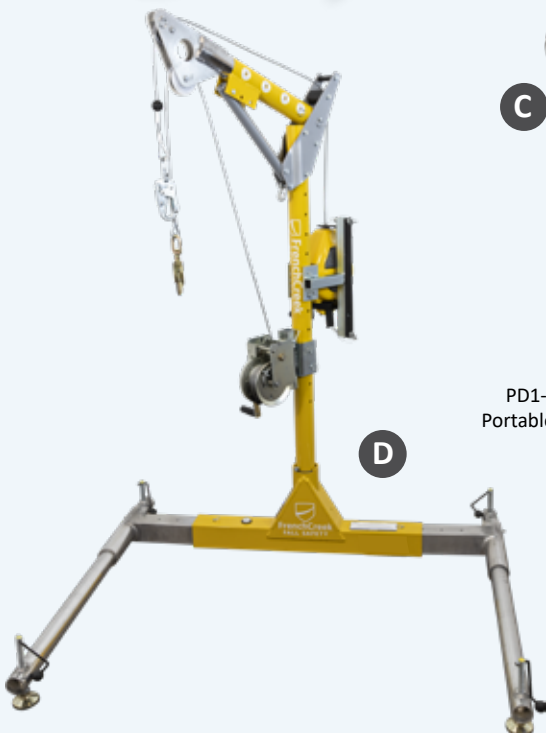

D PD1-4 Complete Portable Davit System

It is imperative to have a rescue plan in place at your jobsite in the event of a fall. These devices are used to raise or lower a fallen worker to safety. The tools and training for safe rescue are the last, but most important step in fall protection.

# BECOME A DISTRIBUTOR

GROW YOUR BUSINESS WITH FALL PROTECTION YOU CAN TRUST

## Enhance Your Product Line & Profits

### Become a distributor:

Looking to expand your product line or start a business in the safety equipment industry? Partner with FrenchCreek Fall Safety — a trusted manufacturer dedicated to quality, innovation, and dependable support. Our distributors gain access to proven products, technical expertise, and business resources that help you grow your profitability and serve your customers with confidence.

For nearly 35 years, FrenchCreek has set the standard for innovation in fall protection. Many of today's most recognized harness designs and safety solutions trace their roots back to our original engineering. Our decades of hands-on experience and in-house manufacturing expertise make us more than a supplier—we're an industry leader trusted by professionals who depend on safety done right.



Learn more, and  
become a distributor  
today!



## Why partner with FrenchCreek?



### High-Quality Products

Deliver confidence to your customers with trusted, durable fall protection and safety solutions built for real-world performance.



### Leading-Lead times

Keep your customers satisfied with industry-leading turnaround times and over 90 of our most popular products shipping the same or next day.



### Sales Training & Support

Empower your team with expert product training and ongoing support designed to boost confidence, strengthen sales, and grow your business.



### Superb Customer Service

Experience responsive, personal support every time you call—real people, real solutions, ready to help when you need it most.

# READY TO SHIP

STOCK PRODUCTS FROM FRENCHCREEK



*These items ship same of next day. All Quickship items are designated with a  symbol.*

| Model #                                    | Pg# |
|--------------------------------------------|-----|
| <b>Full Body Harnesses</b>                 |     |
| 22850B harness                             | 14  |
| 22650B harness                             | 15  |
| 22850BH-ALT harness                        | 18  |
| 850AB harness                              | 24  |
| 850B-TS harness                            | 26  |
| 550 harness                                | 29  |
| 650-U harness                              | 29  |
| 631 harness                                | 30  |
| 651 harness                                | 30  |
| 651B harness                               | 30  |
| 631LJ harness                              | 32  |
| 22850B-TS harness                          | 73  |
| <b>Bosun Chairs/Work Seats</b>             |     |
| 4151 deluxe work seat                      | 37  |
| 4154 work seat                             | 37  |
| <b>Harnesses Options &amp; Accessories</b> |     |
| TL3 tool lanyard                           | 38  |
| 1418 d-ring extension                      | 38  |
| 1418-loop d-ring extension                 | 38  |
| U-STEP suspension straps                   | 39  |
| <b>Self-Retracting Lifelines</b>           |     |
| RG3-13-0Z 13' web SRL                      | 41  |
| MRG3-0Z 13' web SRL                        | 42  |
| M2RG-4Z 8' web SRL                         | 43  |
| M2RG-0Z 8' web SRL                         | 43  |
| XR-7W 7' web SRL                           | 45  |
| XR-11G 11' cable SRL                       | 45  |
| XR-30G 30' cable SRL                       | 45  |
| XR-50LEG 50' LE SRL                        | 47  |
| XR-30LEG 30' LE SRL                        | 47  |
| XR-20LEG 20' LE SRL                        | 47  |
| RL25AGZ 25' cable SRL                      | 48  |
| RL50GZ 50' cable SRL                       | 48  |
| 354-MR SRL connector                       | 43  |

| Model #                            | Pg# |
|------------------------------------|-----|
| <b>Confined Space &amp; Rescue</b> |     |
| PD1 davit mast assembly            | 51  |
| PD2 davit portable base            | 51  |
| PD3 mounting bracket               | 51  |
| PD4 mounting bracket               | 51  |
| PD5 core mount base                | 53  |
| PD6 cast-in-place base             | 55  |
| PD7 floor mount base               | 57  |
| PD8 wall mount base                | 59  |
| PD9 barrel-mount base              | 61  |
| PD10 hitch-mount base              | 63  |
| PD11 hitch-mount base              | 65  |
| S50G-7 tripod system               | 66  |
| R50G-TP7 tripod system             | 66  |
| S50G-M7 tripod system              | 66  |
| R50G rescue SRL                    | 67  |
| MW50G material winch               | 67  |
| TP7 tripod                         | 67  |
| TP9 tripod                         | 67  |
| 204 winch carry bag                | 71  |
| 206 tripod carry bag               | 71  |
| 354-4 carabiner                    | 71  |
| 354-5 carabiner                    | 71  |
| 45 split pulley                    | 71  |
| <b>Ladder Safety Systems</b>       |     |
| 1401A-38 cable grab                | 75  |
| 2-1200A-AT rail trolley            | 76  |
| 2-1224A-AT rail trolley            | 76  |
| 5-1501 rail extension              | 77  |
| 5-1502B rail extension             | 77  |
| 4-1000 ladder guard                | 78  |
| <b>Guardrail System</b>            |     |
| GR200 guardrail system             | 118 |

| Model #                       | Pg# |
|-------------------------------|-----|
| <b>Lanyards</b>               |     |
| 450A lanyard                  | 82  |
| 440AZ dual-leg lanyard        | 82  |
| 444A adjustable lanyard       | 82  |
| 450AB lanyard                 | 83  |
| 450AS lanyard                 | 84  |
| 440AS dual-leg lanyard        | 84  |
| 460A lanyard                  | 87  |
| 460AS lanyard                 | 88  |
| 490A lanyard                  | 90  |
| 450B positioning lanyard      | 91  |
| <b>Rebar Chain Assemblies</b> |     |
| 324-CSZ rebar assembly        | 92  |
| 324-C rebar assembly          | 92  |
| <b>Anchorage Connectors</b>   |     |
| 1300-WP tie-off adapter       | 96  |
| 1100-WP tie-off adapter       | 96  |
| 1300 tie-off adapter          | 96  |
| 1600VC tie off adapter        | 97  |
| 1769 steel toggle anchor      | 98  |
| 1785 door jamb anchor         | 102 |
| RTO-12 tie-off pole           | 103 |
| 1503 wire hook anchor         | 104 |
| <b>Roof Safety</b>            |     |
| RKB-1715-50 roofing kit       | 105 |
| 411 rope lifeline             | 106 |
| 410 rope lifeline             | 106 |
| 1201N rope grab               | 108 |
| 1202AN-3 rope grab            | 108 |
| 1201 rope grab                | 109 |
| 411-50MG grab and lifeline    | 109 |
| 1401-38 cable grab            | 109 |
| MRA-R1 roof anchor            | 110 |
| 1715 roof anchor              | 110 |
| 1720 roof anchor              | 109 |
| 1730 roof anchor              | 110 |
| 1740 roof anchor              | 110 |





## FULL BODY HARNESSES

Shown:  
22850BH-ALT  
STRATOS Full Body Harness



## Harness Customization Options

### D-ring options

FrenchCreek offers customizable harness D-ring options for any job task. Our diagram clearly shows each D-ring location and its purpose, making it easy to choose the right configuration. We can tailor your harness so every D-ring meets your specific work needs.



Dorsal  
Attachment  
(All Harnesses)



Hip  
Attachment  
(B Option)



Shoulder  
Attachment  
(D Option)



Sternal  
Attachment  
(H Option)



Rear Waist  
Attachment  
(OD Option)



Frontal Waist  
Attachment  
(TS Option)

## Leg Strap Options

### Connecting Buckle Options

Choose the style of leg buckle that you prefer.

**Available options include:**

- ♥ Pass-Thru buckles
- ♥ Tongue buckle/grommet
- ♥ Bayonet buckles

#### Pass-Thru Buckle



#### Tongue Buckle/Grommet



#### Bayonet Buckle





**Harness Customization Options**

**Your Harness, Your Way**

At FrenchCreek, we understand that not all job sites are the same. So why should you settle for equipment that doesn't fully meet your job requirements? Sometimes straight off the shelf doesn't cut it. Our industry experts will work with you to provide you with a product that can tackle the toughest job sites.



**400R**  
Lanyard Retaining Rings



**Option 9**  
D-Ring Extension



**Option B**  
Hip-Positioning D-rings



**800PS**  
Removable Suspension Saddle



**Option W**  
Waist-Positioning D-ring



**Option D**  
Shoulder-Positioning D-rings

**101R**  
Removable/Reusable Lanyard Retainer

**Option H**  
Chest-Positioning D-ring


**Webbing Colors**  
Several Color Options Available

**Leg Buckle Options**  
Choose from:  
Bayonet, Tongue & Grommet, Pass-Thru

**Scan to view more harness options**

**Sizing Chart** (STRATOS Series Harnesses ONLY)

Choosing the right size harness is a very important safety factor for fall protection. It's not like just choosing the right size T-shirt; just because you wear a XL T-shirt doesn't necessarily mean you wear an XL harness. See the sizing chart below for the appropriate fit for FrenchCreek STRATOS harnesses:

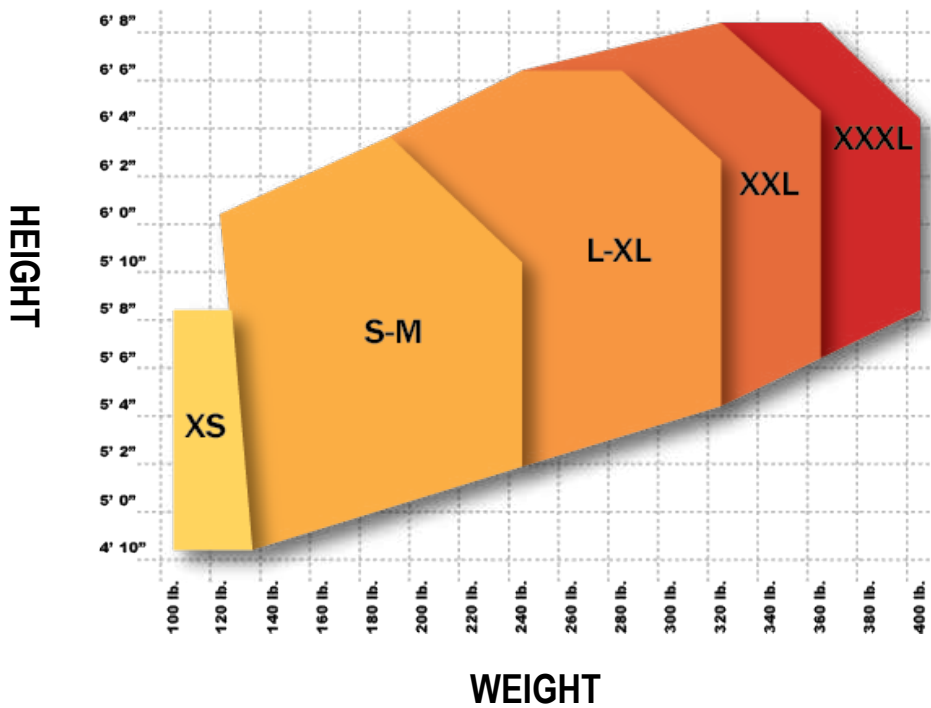

STEP 1



Visually inspect the harness

STEP 2



Disconnect any buckles

STEP 3



Slip on the harness like a jacket

STEP 4



Adjust & buckle the waist belt

STEP 5



Buckle & adjust the leg straps

STEP 6



Adjust the shoulder/torso straps

STEP 7



Buckle & adjust the chest strap

## STRATOS 22AL SERIES

### Lightweight Stratos Series Harness

Built on the foundation of our trusted Stratos series, the 22AL Series harness takes safety and comfort to the next level. Designed with all-aluminum D-rings and hardware, this harness reduces weight without compromising strength or durability, making long days on the job easier on the back and shoulders.

Our **new aluminum cam buckle** allows for fast, precise fitting, ensuring the harness sits correctly on every user for maximum safety and comfort. The 22AL Series harness combines lightweight design, advanced features, and effortless adjustability—engineered for professionals who demand both performance and reliability.

#### Standard Features Include:

- Comfort back & waist pad
- Aluminum bayonet chest buckle
- Aluminum bayonet leg buckles
- Aluminum D-ring locations
- **New aluminum cam buckle** for easy torso adjustment
- Redesigned with a **lighter build than the original Stratos**

# Lighten UP!



22AL670B-BLUE

#### Available Options:

The 22AL series is available in **most popular configurations** of our original Stratos series Harness. Including:

**22AL870B-BLUE** - 6 point adjustment, waist pad, hip d-rings, quick-connect legs.

**22AL670B-BLUE**- 5 point adjustment, hip d-rings, quick-connect legs.

**Custom options available!**



Aluminum chest buckle



Aluminum cam buckle



Aluminum D-rings



Aluminum leg buckles



22AL870B-BLUE

### 22AL870B-BLUE

6-point adjustment with comfort waist pad  
All aluminum hardware (D-rings, buckles)  
Aluminum cam buckle  
Hip positioning D-rings  
Aluminum bayonet buckle leg straps



## STRATOS SERIES

### Full Body Harnesses (2200 Series)

The innovative STRATOS Series full body harness exceeds expectations at the highest level. Designed with safety, durability, and maximum comfort, the FrenchCreek STRATOS Series hits the mark.

- ♥ Air-mesh comfort shoulder, back, and leg pads
- ♥ Adjustable floating chest strap
- ♥ Break-away lanyard parking retainer
- ♥ Bayonet buckle chest straps
- ♥ Most options, accessories & color choices available
- ♥ **Available in sizes XS, S-M, L-XL, 2XL, 3XL**



#### **22850B**

6-point adjustment with comfort waist pad  
Hip positioning D-rings  
Tongue buckle/grommet leg adjustments  
In stock sizes **S-M, L-XL**



**22650**  
5-point adjustment  
Tongue buckle/grommet legs



**226509B**  
5-point adjustment  
Hip positioning D-rings  
D-ring extension  
Tongue buckle/grommet legs

**22650B**  
 **L-XL size quickship only**  
5-point adjustment  
Hip positioning D-rings  
(No D-ring extension)  
Tongue buckle/grommet legs  
In stock size **L-XL**



**22670**  
5-point adjustment  
Bayonet leg buckles



**22670B**  
5-point adjustment  
Hip positioning D-rings  
Bayonet leg buckles



## 22850

6-point adjustment with waist pad  
Tongue buckle/grommet legs



## 22850B

6-point adjustment  
Hip positioning D-rings  
Comfort waist pad  
Tongue buckle/grommet legs  
In stock sizes **S-M, L-XL**



## 22870

6-point adjustment with waist pad  
Bayonet leg buckles



## 22870B

6-point adjustment  
Hip positioning D-rings  
Bayonet leg buckles





**22950**  
4-point adjustment cross-over style  
Tongue buckle/grommet legs



**22950B**  
4-point adjustment cross-over style  
Hip positioning D-rings  
Tongue buckle/grommet legs



**22970**  
4-point adjustment cross-over style  
Bayonet leg buckles



**22970B**  
4-point adjustment cross-over style  
Hip positioning D-rings  
Bayonet leg buckles

## STRATOS SERIES

### Full Body Tower Climbing Harness

FrenchCreek has designed one of the most lightweight and comfortable tower climbing harnesses in the industry. The air mesh padding combined with the suspension saddle makes the STRATOS tower climbing harness the work horse of the industry.

- ♥ 6-point adjustment with waist pad
- ♥ Hip-positioning D-ring
- ♥ Sternum D-rings
- ♥ Suspension saddle with D-rings and aluminum workseat
- ♥ Most options, accessories & color choices available



### Ordering Options

#### 22850BH-ALT

STRATOS tower climbing harness with tongue buckle/grommet legs  
In stock sizes **S-M, L-XL**

#### 22870BH-ALT

STRATOS tower climbing harness with bayonet leg buckles

## STRATOS SERIES

### Full Body Oil Derrick Harness

FrenchCreek has designed this version of the STRATOS Series harness to meet the specific demands of the oil industry. Excellent for fall protection and positioning, this harness features an oil derrick pad waist belt, and suspension saddle for climbing the rig.

- ♥ Air-mesh comfort shoulder, back, and leg pads
- ♥ Adjustable floating chest strap
- ♥ Break-away lanyard parking retainer
- ♥ Bayonet buckle chest straps
- ♥ Most options, accessories & color choices available
- ♥ **Available in sizes XS, S-M, L-XL, 2XL, 3XL**



### Ordering Options

#### 228509BT-OD

STRATOS oil derrick harness  
with tongue buckle/grommet  
legs

#### 228709BT-OD

STRATOS oil derrick harness  
with bayonet leg buckles



## STRATOS SERIES

### Maximum Comfort Full Body Harness

The 22850B-HD version of the STRATOS full body harness provides maximum comfort for all day use. The air-mesh lumbar pad has been doubled in thickness to provide maximum support and comfort. Additional gear loops have been added to the back of the harness for easier tool carrying at work-sites.

- ♥ Air-mesh comfort shoulder, back and leg pads
- ♥ Adjustable floating chest strap
- ♥ Break-away lanyard parking retainer
- ♥ Bayonet buckle chest strap
- ♥ Most options, accessories & color choices available



Additional equipment/gear loops



Additional comfort padding

### 22850B-HD

6-point adjustment with extra-thick comfort waist pad  
Hip-positioning D-rings  
Tongue buckle/grommet legs  
Additional equipment/gear loops

## STRATOS SERIES LANYARDS

### Shock absorbing lanyards (2200 Series)

All STRATOS lanyards come in 6' lengths with black webbing, and meet the performance requirements of ANSI Z359. Other lengths and snaphook combinations are available. FrenchCreek lanyards are constructed from nylon and polyester webbing and are rated from 130-310 lbs. per ANSI and exceed OSHA requirements.



#### 22450A

6' pack style shock absorbing lanyard  
1" wide webbing  
Z74 locking snaphooks each end



#### 22450AS

6' pack style shock absorbing lanyard  
1 3/8" wide tubular webbing  
Relaxed length of 4 1/2'  
Z74 locking snaphooks each end



#### 22440AS

6' 100% tie-off pack style shock absorbing lanyard  
1 3/8" wide tubular webbing  
Relaxed length of 4 1/2'  
Z74 locking snaphooks each end



#### 22420A

6' 100% tie-off shock absorbing lanyard  
1 3/8" wide tubular webbing  
Z74 locking snaphooks each end



#### 22420AS

6' 100% tie-off tubular style shock absorbing lanyard  
2" wide tubular webbing  
Relaxed length of 4 1/2'  
Z74 locking snaphooks each end

## 22030B

### Navigator Full Body Harness

Constructed of 1-3/4" wide webbing and air-mesh padding, the Navigator offers maximum comfort for all day use. The capabilities for the Navigator are nearly endless, with several D-ring connections and "pick-points" perfect for high angle rescue, tower climbing, and other tactical applications.

- ♥ Wide waist belt & lumbar pad
- ♥ Comfort air-mesh padding on shoulders, back & legs
- ♥ Front sternum attachment point, perfect for rescue
- ♥ Several equipment/gear loops & attachment points
- ♥ Most options, accessories, & color choices available
- ♥ *Available in sizes: XS, S-M, L-XL, XXL*



### Ordering Options

#### 22030B-BLK

Standard Navigator harness  
with fixed leg buckles


#### 22070B-BLK

Standard Navigator harness  
with bayonet leg buckles



Sizing Chart (500, 600, 800 & 900 series harness)

Choosing the right size harness is a very important safety factor for fall protection. It's not like just choosing the right size T-shirt; just because you wear a XL T-shirt doesn't necessarily mean you wear an XL harness. See the sizing chart below for the appropriate fit for FrenchCreek harnesses:

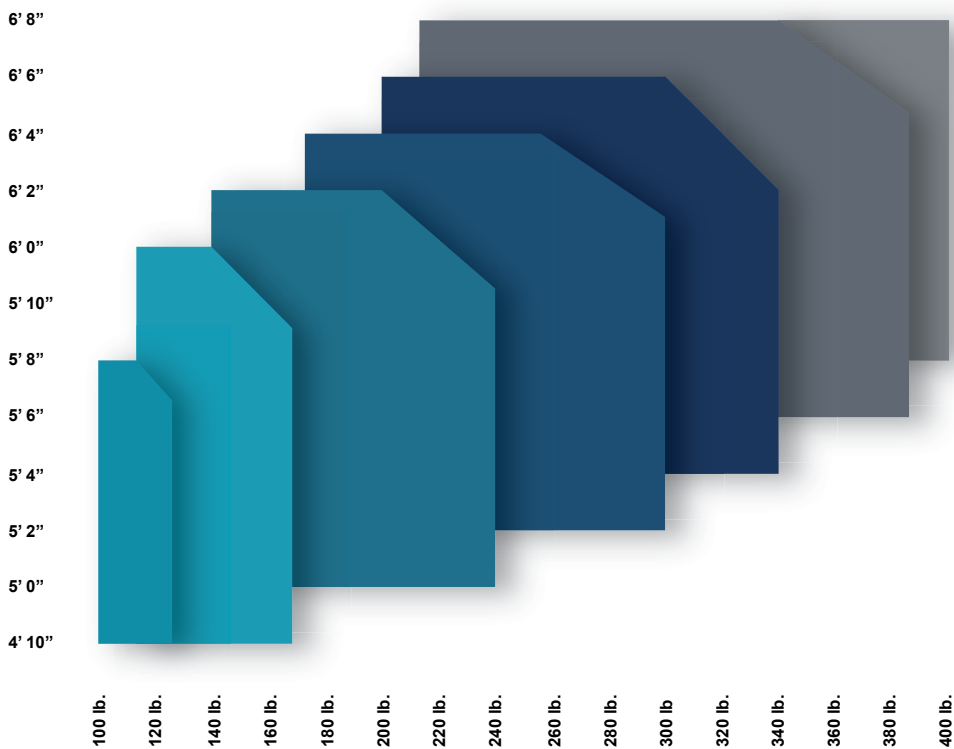

| SIZE              | XS    | SM    | MED   | LG    | XL    | 2XL   | 3XL   | 4XL   |
|-------------------|-------|-------|-------|-------|-------|-------|-------|-------|
| WAIST<br>(INCHES) | 28-36 | 32-40 | 36-44 | 40-48 | 44-52 | 48-56 | 52-60 | 56-64 |

STEP 1



Visually inspect the harness

STEP 2



Disconnect any buckles

STEP 3



Slip on the harness like a jacket

STEP 4



Adjust & buckle the waist belt

STEP 5



Buckle & adjust the leg straps

STEP 6



Adjust the shoulder/torso straps

STEP 7



Buckle & adjust the chest strap

## 800 Series

### Full Body Harnesses

The 800 series harnesses are extremely durable and comfortable. With a range that is extensive with a suitable model for everyone and every job, the 800 series is a long-time favorite in the construction industry and many others.

- Adjustable shoulder, chest, waist and leg straps
- Sliding back D-ring
- 6" wide comfort waist pad w/removable heavy duty tool belt
- Lightweight, high strength synthetic webbing
- Available in sizes: XS, S, M, L, XL, 2XL, 3XL

#### Q 850AB

- 6-point adjustment
- Shoulder pads
- Hip-positioning D-rings
- Tongue buckle/grommet legs
- In stock sizes S-XXL



### Harness Options & Configurations (additional options available)

| Model #   | Leg Buckles | Chest Buckle | Shoulder Pads | Dorsal D-ring | Hip D-rings | Shoulder D-rings | Chest D-ring | Waist D-ring |
|-----------|-------------|--------------|---------------|---------------|-------------|------------------|--------------|--------------|
| Q 850AB   | grommet     | mating       | ✓             | ✓             | ✓           | ✗                | ✗            | ✗            |
| 850       | grommet     | mating       | ✗             | ✓             | ✗           | ✗                | ✗            | ✗            |
| 850A      | grommet     | mating       | ✓             | ✓             | ✗           | ✗                | ✗            | ✗            |
| 850B      | grommet     | mating       | ✗             | ✓             | ✓           | ✗                | ✗            | ✗            |
| 870       | bayonet     | bayonet      | ✗             | ✓             | ✗           | ✗                | ✗            | ✗            |
| 870A      | bayonet     | bayonet      | ✓             | ✓             | ✗           | ✗                | ✗            | ✗            |
| 870B      | bayonet     | bayonet      | ✗             | ✓             | ✓           | ✗                | ✗            | ✗            |
| 870AB     | bayonet     | bayonet      | ✓             | ✓             | ✓           | ✗                | ✗            | ✗            |
| Q 850B-TS | grommet     | mating       | ✗             | ✓             | ✓           | ✗                | ✗            | ✓            |
| 850ABH    | grommet     | mating       | ✓             | ✓             | ✓           | ✗                | ✓            | ✗            |
| 850ABD    | grommet     | mating       | ✓             | ✓             | ✓           | ✓                | ✗            | ✗            |
| 833       | mating      | mating       | ✗             | ✓             | ✗           | ✗                | ✗            | ✗            |

See page 9 for D-ring and buckle options.

## 872 Series

### Women's Full Body Harness

The FrenchCreek full body harness for women is designed with form-fitting comfort; utilizing the combination of lightweight, synthetic, high-strength certified webbing.

♥ Available in sizes: XS, S-M, L-XL, XXL, XXXL

#### 872B

6-point adjustment  
Female fit leg straps  
Hip positioning D-rings  
Bayonet chest buckle  
Bayonet leg buckles



Female fit leg straps



#### 872AB

6-point adjustment  
Female fit leg straps  
Hip positioning D-rings  
Shoulder pads  
Bayonet chest buckle  
Bayonet leg buckles



#### 872

6-point adjustment  
Female fit leg straps  
Bayonet chest buckle  
Bayonet leg buckles



## 800 Series

### Tower Climbing Harnesses

FrenchCreek tower climbing harnesses are designed to meet the specific safety and functional needs for climbing towers.

♥ Available in sizes: XS, S, M, L, XL, 2XL, 3XL

#### 850ABTH

6-point adjustment  
Sternum D-ring  
Accessory rings  
Suspension saddle with D-rings  
Hip-positioning D-rings  
Tongue buckle/grommet legs



#### 850B-TS

6-point adjustment  
Waist D-ring for vertical climbing systems  
Hip-positioning D-rings  
Tongue buckle/grommet legs  
In stock sizes **M, L, XL**



#### 800PS

Removable saddle for comfort  
Positioning and suspension applications  
Must be used in conjunction with a full body harness  
Can be integrated into any 800 series belt/pad



## 887PBT

- 6-point adjustment
- Adjustable sternum D-ring
- Back pad
- Accessory rings
- Fixed rigid suspension saddle
- Hip-positioning D-rings
- Tongue buckle/grommet legs



## 897ABT

- 6-point adjustment
- Adjustable sternum D-ring
- Back pad
- Accessory rings
- Removable suspension saddle
- Hip-positioning D-rings
- Tongue buckle/grommet legs

## 800 Series

### Full Body Oil Derrick Harness

FrenchCreek's 800 series oil derrick harnesses are perfect for workers who operate on the monkey board. Built for extreme comfort and convenience, this harness is built for prolonged shifts where practical fall protection is needed.

- ♥ 6" comfort waist belt
- ♥ Hip-positioning D-rings
- ♥ Removable 8" wide belly pad
- ♥ Seat sling with positioning D-rings
- ♥ Back positioning waist D-rings
- ♥ Most options, accessories, & color choices available
- ♥ **Available in sizes XS, S, M, L, XL, 2XL, 3XL**



#### 8D1509ABT

800 series oil derrick harness  
Tongue buckle/grommet legs



## 500 Series

### Full Body Harnesses

The 500 series is a favorite for maintenance and light construction. Standard features include:

- ♥ Adjustable shoulder, chest, waist, and leg straps
- ♥ Integral 1-3/4" waist belt
- ♥ Sliding back D-ring
- ♥ Lightweight high strength synthetic webbing
- ♥ **Available in sizes XS, S, M, L, XL, 2XL, 3XL**

- Q 550**  
6-point adjustment  
Tongue buckle/grommet legs  
In stock sizes **S, M, L, XL, XXL**



### Harness Options & Configurations (additional options available)

| Model #      | Leg Buckles | Chest Buckle | Dorsal D-ring | Hip D-rings | Shoulder D-rings | Chest D-ring | Waist D-ring |
|--------------|-------------|--------------|---------------|-------------|------------------|--------------|--------------|
| <b>Q 550</b> | grommet     | mating       | ✓             | ✗           | ✗                | ✗            | ✗            |
| <b>530</b>   | mating      | mating       | ✓             | ✗           | ✗                | ✗            | ✗            |
| <b>550B</b>  | grommet     | mating       | ✓             | ✓           | ✗                | ✗            | ✗            |
| <b>570</b>   | grommet     | bayonet      | ✓             | ✗           | ✗                | ✗            | ✗            |

See page 9 for D-ring and buckle options.

## 600 Series

### Full Body Harnesses

The 600 series harnesses incorporate a lightweight design that will give your workers the freedom of movement when working at any height. Standard features include:

- ♥ Adjustable shoulder, chest and leg straps
- ♥ Sub-pelvic strap
- ♥ Sliding back D-ring
- ♥ Lightweight, high-strength synthetic webbing
- ♥ **Available in sizes XS, S, M, L, XL, 2XL, 3XL**

- Q 650-U**  
5-point adjustment  
Sub-pelvic strap  
Tongue buckle/grommet legs  
**One universal size**



### Harness Options & Configurations (additional options available)

| Model #        | Leg Buckles | Chest Buckle | Dorsal D-ring | Hip D-rings | Shoulder D-rings | Chest D-ring | Waist D-ring |
|----------------|-------------|--------------|---------------|-------------|------------------|--------------|--------------|
| <b>Q 650-U</b> | grommet     | mating       | ✓             | ✗           | ✗                | ✗            | ✗            |
| <b>650B</b>    | mating      | mating       | ✓             | ✓           | ✗                | ✗            | ✗            |
| <b>630</b>     | mating      | mating       | ✓             | ✗           | ✗                | ✗            | ✗            |
| <b>630B</b>    | mating      | mating       | ✓             | ✓           | ✗                | ✗            | ✗            |

See page 9 for D-ring and buckle options.

## 601 Series

### Full Body Harnesses (lightweight series)

The 601 series harnesses are lightweight, versatile, and easy to use. A great overall choice for general construction or roofing. Standard features include:

- ♥ 3-point adjustment (chest and leg straps)
- ♥ Sliding back D-ring
- ♥ Lightweight, high strength synthetic webbing
- ♥ **TWO UNIVERSAL SIZES ONLY (S-M and M-XL)**



**Q 651**  
3-point adjustment  
Hip-positioning D-rings  
Tongue buckle/grommet legs  
**Quickship M-XL only**

**Q 631**  
3-point adjustment  
Mating leg buckles  
In stock sizes **S-M, M-XL**



| Harness Options & Configurations (additional options available) |             |              |               |             |                  |              |              |
|-----------------------------------------------------------------|-------------|--------------|---------------|-------------|------------------|--------------|--------------|
| Model #                                                         | Leg Buckles | Chest Buckle | Dorsal D-ring | Hip D-rings | Shoulder D-rings | Chest D-ring | Waist D-ring |
| <b>Q 631</b>                                                    | mating      | mating       | ✓             | ✗           | ✗                | ✗            | ✗            |
| <b>631B</b>                                                     | mating      | mating       | ✓             | ✓           | ✗                | ✗            | ✗            |
| <b>631D</b>                                                     | mating      | mating       | ✓             | ✗           | ✓                | ✗            | ✗            |
| <b>Q 651</b>                                                    | grommet     | mating       | ✓             | ✗           | ✗                | ✗            | ✗            |
| <b>Q 651B</b>                                                   | grommet     | mating       | ✓             | ✓           | ✗                | ✗            | ✗            |
| <b>651D</b>                                                     | grommet     | mating       | ✓             | ✗           | ✓                | ✗            | ✗            |
| <b>651H</b>                                                     | grommet     | mating       | ✓             | ✗           | ✗                | ✓            | ✗            |
| <b>671</b>                                                      | bayonet     | bayonet      | ✓             | ✗           | ✗                | ✗            | ✗            |

See page 9 for D-ring and buckle options.

## 900 Series

### Full Body Harnesses (cross-over style)

The 900 series can be used in a multitude of applications. The harness is donned by a step-thru procedure that is quick and easy. Standard features include:

- ♥ Front cross-over style
- ♥ Adjustable shoulder and leg straps
- ♥ Chest D-ring for positioning, suspension and rescue
- ♥ Lightweight, high strength synthetic webbing
- ♥ Sternal D-ring
- ♥ *Available in sizes XS, S, M, L, XL, 2XL, 3XL*

#### 930

4-point adjustment cross-over style  
Pass-thru leg buckles



#### 930B

4-point adjustment cross-over style  
Hip-positioning D-rings  
Pass-thru leg buckles



#### 950

4-point adjustment cross-over style  
Tongue buckle/grommet legs



#### 950B

4-point adjustment cross-over style  
Hip-positioning D-rings  
Tongue buckle/grommet legs



## Specialty

### Full Body Harnesses


In many situations a specialty harness may be necessary for ensured safety. These harnesses meet the specific industry requirements and help workers in these fields work safely.

*The coefficient of retro-reflection for the 552 and the 631LJ harnesses have an initial value of 700 and a minimum value of 330 per ANSI/ISEA 107-2015*


Available in sizes: XS, S, M, L, XL, 2XL, 3XL

#### 552

5-point adjustable harness  
Miner's harness with lamp and battery straps  
Dual lanyard retaining rings each shoulder  
Radio loops  
Tongue buckle/grommet legs  
152" of reflective material



Reflective Material



Reflective Material

#### Q 631LJ

3-point adjustable harness  
Pass-thru leg straps  
Built in life jacket **Type 3 PFD**  
Life jacket comes in universal size: S-XXL

## Arc Flash

### Full Body Harnesses

FrenchCreek's arc flash harnesses offer fall protection, protecting workers from falls caused by electric arc-blast exposure. These harnesses are made from heat & flame resistant webbing.

*Flame resistant fabric has an arc rating of 8.6 CAL/CM<sup>2</sup> per ASTM 1959 and is ASTM F1506 compliant with an NFPA 70E rating of category 2.*

#### AF630KDE

Kevlar® webbing  
Dielectric hardware (chest, shoulder, leg)  
Dielectric back D-Ring  
Flame resistant label cover

**Available in sizes: XS, S, M, L, XL, 2XL, 3XL**

Harness Meets:

**ASTM F887-13**

**ANSI Z359.1-2007**

**OSHA 1910.269 & 1926.54**



#### AF390AKZ

6' Kevlar® shock absorbing lanyard  
Flame resistant shock-pack & label cover  
Harness choke loop  
#Z74 (3/4" opening) locking snaphook  
Lanyards Meets:

**ASTM F887-13**

**ANSI Z359.1-2007**

**OSHA 1910.269 & 1926.54**



#### AF390AKDLZ

6' Kevlar® Dual-leg shock absorbing lanyard  
Flame resistant shock-pack & label cover  
Harness choke loop  
#Z74 (3/4" opening) locking snaphooks  
Lanyards Meets:

**ASTM F887-13**

**ANSI Z359.1-2007**

**OSHA 1910.269 & 1926.54**



## 631KUT

Kevlar® webbing  
Dielectric back D-Ring  
Flame resistant buckle covers  
*Available in sizes: S-M,M-XL*




## 630UT

Utility harness, no metal above the waist  
Buckle insulators  
Sliding back web loop  
*Available in sizes: XS, S, M, L, XL, 2XL, 3XL*



## 347AS-135A

6' Dual-leg elastic shock absorbing lanyard  
#135A (2 1/2" gate opening) aluminum snaphooks  
Harness choke loop

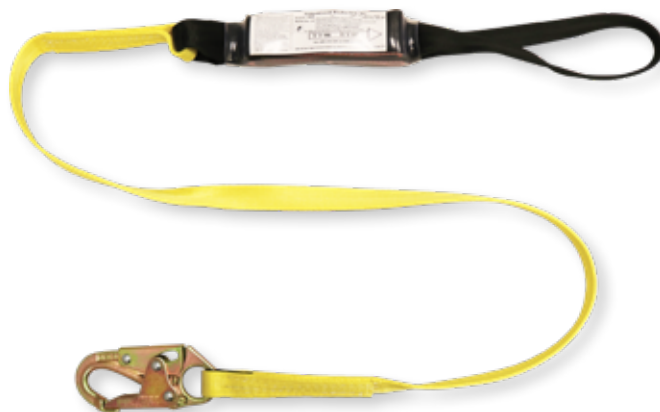

## 355A

6' shock absorbing lanyard  
#Z74 (3/4" opening) snaphook  
Harness choke loop



## Welding

### Full Body Harnesses & Accessories

FrenchCreek manufactures these harnesses out of high-strength Kevlar webbing that meets the heat and flame resistance requirements that occur in harsh environments.

*Flame resistant fabric has an arc rating of 8.6 CAL/CM<sup>2</sup> per ASTM 1959 and is ASTM F1506 compliant with an NFPA 70E rating of category 2.*



#### 530-HOT

6 point adjustment with waist pad  
Kevlar® webbing  
Pass-thru leg buckles

*Available in sizes: XS, S, M, L, XL, 2XL, 3XL*



#### 631-HOT

3 point adjustment  
Kevlar® webbing  
Pass-thru leg buckles

*Available in sizes: S-M, M-XL*



#### 631B-HOT

3-point adjustment  
Kevlar® webbing  
Hip positioning D-rings  
Pass-thru leg buckles

*Available in sizes: S-M, M-XL*



#### 400SC-FR

*Flame resistant strap covers*  
Covers chest and shoulder straps  
Fits most harnesses




## 400BC

**Flame resistant buckle covers**  
Installs with velcro closure



## RL32V

**32' composite-coated wire rope SRL** (composite coated wire rope helps to eliminate arc from welding)  
#RL-28 (3/4" opening) locking swivel snap  
#354-4 (1") opening carabiner for anchoring  
Class "1" SRL

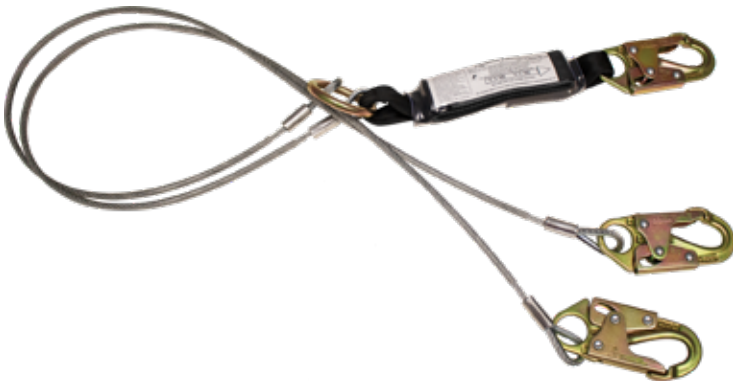

## 480AK

Vinyl coated wire rope shock absorbing lanyard  
Kevlar® web shock-pack  
#Z74 locking snaphooks on each end  
Pack style shock absorber



## 490AK

Kevlar® web shock absorbing lanyard  
#Z74 (3/4" opening) locking snaphooks on each end  
Pack style shock absorber

## 4000 Series

### Bosun's Chairs & Workseats

FrenchCreek manufactures a wide variety of exceptionally comfortable work seats and Bosun's chairs that are useful for inspection work, window washing, painting and maintenance. Seats manufactured out of 3/4" rigid board.



**Q 4154**  
12" x 24" Work Seat  
Built-in universal size harness  
Spreader bar and yoke



**Q 4151**  
21" x 16" Deluxe Work Seat  
Built-in universal size harness  
Spreader bar and yoke



**4153**  
21" x 16" Deluxe Work Seat  
Does not include harness



**4754**  
12" x 24" Work Seat  
Built-in universal size harness  
Tongue buckle/grommet legs  
Removable waist belt



## TL3 Series

### Tool Lanyards

The sidekick tool lanyard from FrenchCreek eliminates the hazard of dropped objects when working at heights. To use, simply attach your tool with the provided carabiner or constrict the cord to the tool.

- ♥ 2' relaxed length, 3'-6' stretch
- ♥ Adjustable cinch cord for tool attachment
- ♥ Fits tools of various shapes and sizes



**TL3**  
Single leg tool lanyard



**TL3DL**  
Dual leg tool lanyard



## 1418 Series


### D-Ring Extension Straps

D-ring extension straps are an accessory to a fall protection harness. The strap is used to extend the back D-ring attachment point.

**1418**  
D-Ring Extension Strap  
Z74 Locking Snaphook  
Connects to Harness D-ring



**1418-LOOP**  
D-Ring Extension Strap  
Choke-loop to Harness D-ring

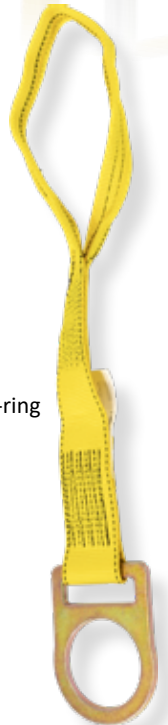

## U-STEP

### Suspension Trauma Relief Straps

The U-STEP is to be used in conjunction with a full body harness and a complete fall prevention/rescue program. It can be attached to most harness sizes, styles and brands. This accessory can stop the deadly effects of suspension trauma.

- ♥ 2 lightweight “packs” easily attach to harness
- ♥ After a fall, the worker can pull out webbing from packs
- ♥ Worker connects the locking clasps to form a loop
- ♥ Worker can stand in the leg loop to relieve trauma

## Q U-STEP

Pair of suspension trauma straps  
Choked thru harness to attach  
Adjustable



## STEP 3.

Step into web loop with both feet



## STEP 1.

Pull U-Step straps out from the side.  
(pull firmly so stitch breaks)



## STEP 2.

Adjust to appropriate length and buckle straps together

## STEP 4.


Stand vertical in web loop to relieve harness tension







## SELF-RETRACTING LIFELINES

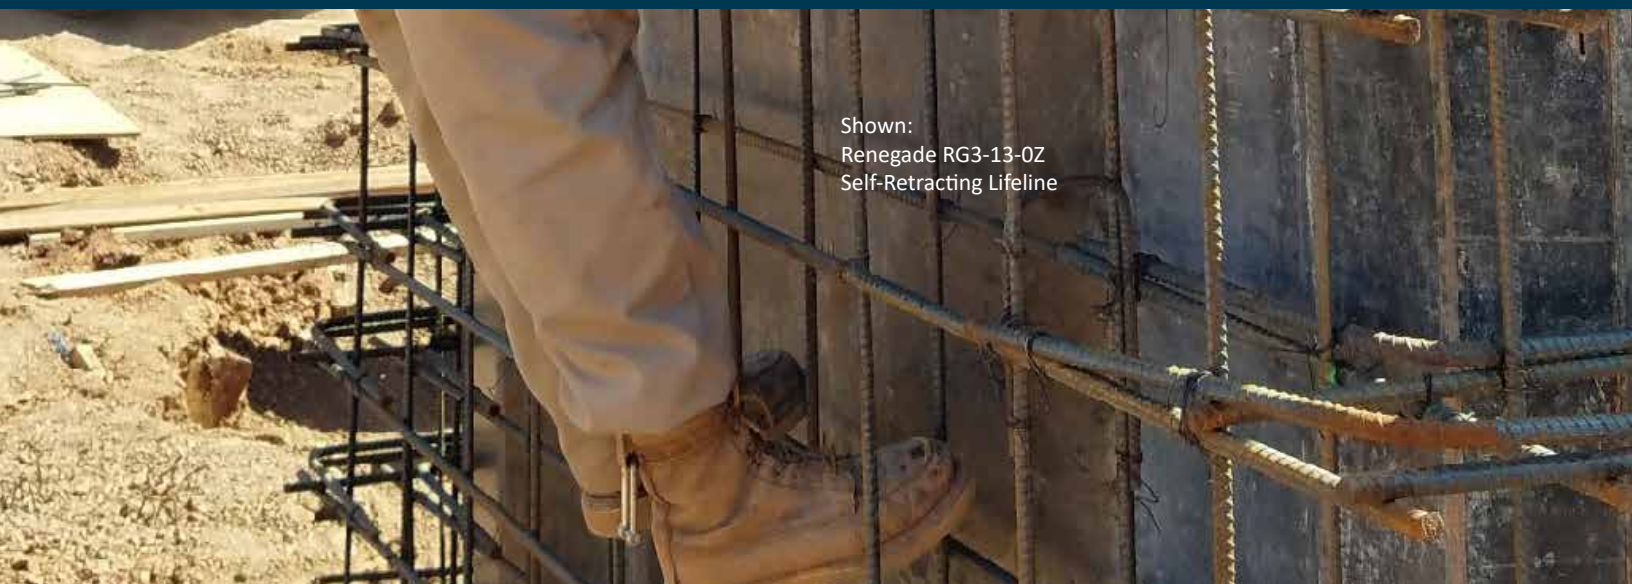

Shown:  
Renegade RG3-13-0Z  
Self-Retracting Lifeline



## Renegade Series

### 13' Compact Self-Retracting Lifeline

The Renegade series provides durability and confidence expected by professionals. Featuring 13 ft. of working capacities with quick fall arrest capability, the Renegade will never let you down.

- ♥ 13' of working length
- ♥ Capacity 130-310 lbs. ANSI, OSHA 400 lbs.
- ♥ No annual factory certification required
- ♥ Short fall arrest Class "1" SRL

#### Variety of 5,000lb connectors



#### Heavy Duty

Corrosive resistant housing made of aluminum and stainless steel.

#### Swivel Anchor Loop

Swivels 360° to limit line twisting for smooth operation.

#### Impact Indicator

Visual impact indicator warns that the unit has experienced fall-arrest forces and must be removed from service.

#### RG3-13-0Z

##### 13' compact web SRL

#354-4 (1" opening) steel carabiner  
#Z74 (3/4" opening) locking snap  
Class "1" SRL

#### Compact Shock Pack

Shock absorbing pack minimizes fall arrest forces.

#### Weight Capacity

Renegade series meets:  
ANSI requirement 130-310 lbs.

OSHA requirement 420 lbs. or less

#### Snaphook options

We offer a full range of snap hook styles and configurations to meet any application. Explore more options at [fcsafety.com](http://fcsafety.com)

Class


**1**

Anchor at or above dorsal D-ring

## Rogue

### 8' Sub-Compact Self-Retracting Lifeline

FrenchCreek's Rogue Self-Retracting Lifeline is light on your back, but heavy on features. The lightweight design is perfect for all day use, and the 8' length gives your workers the freedom of movement.

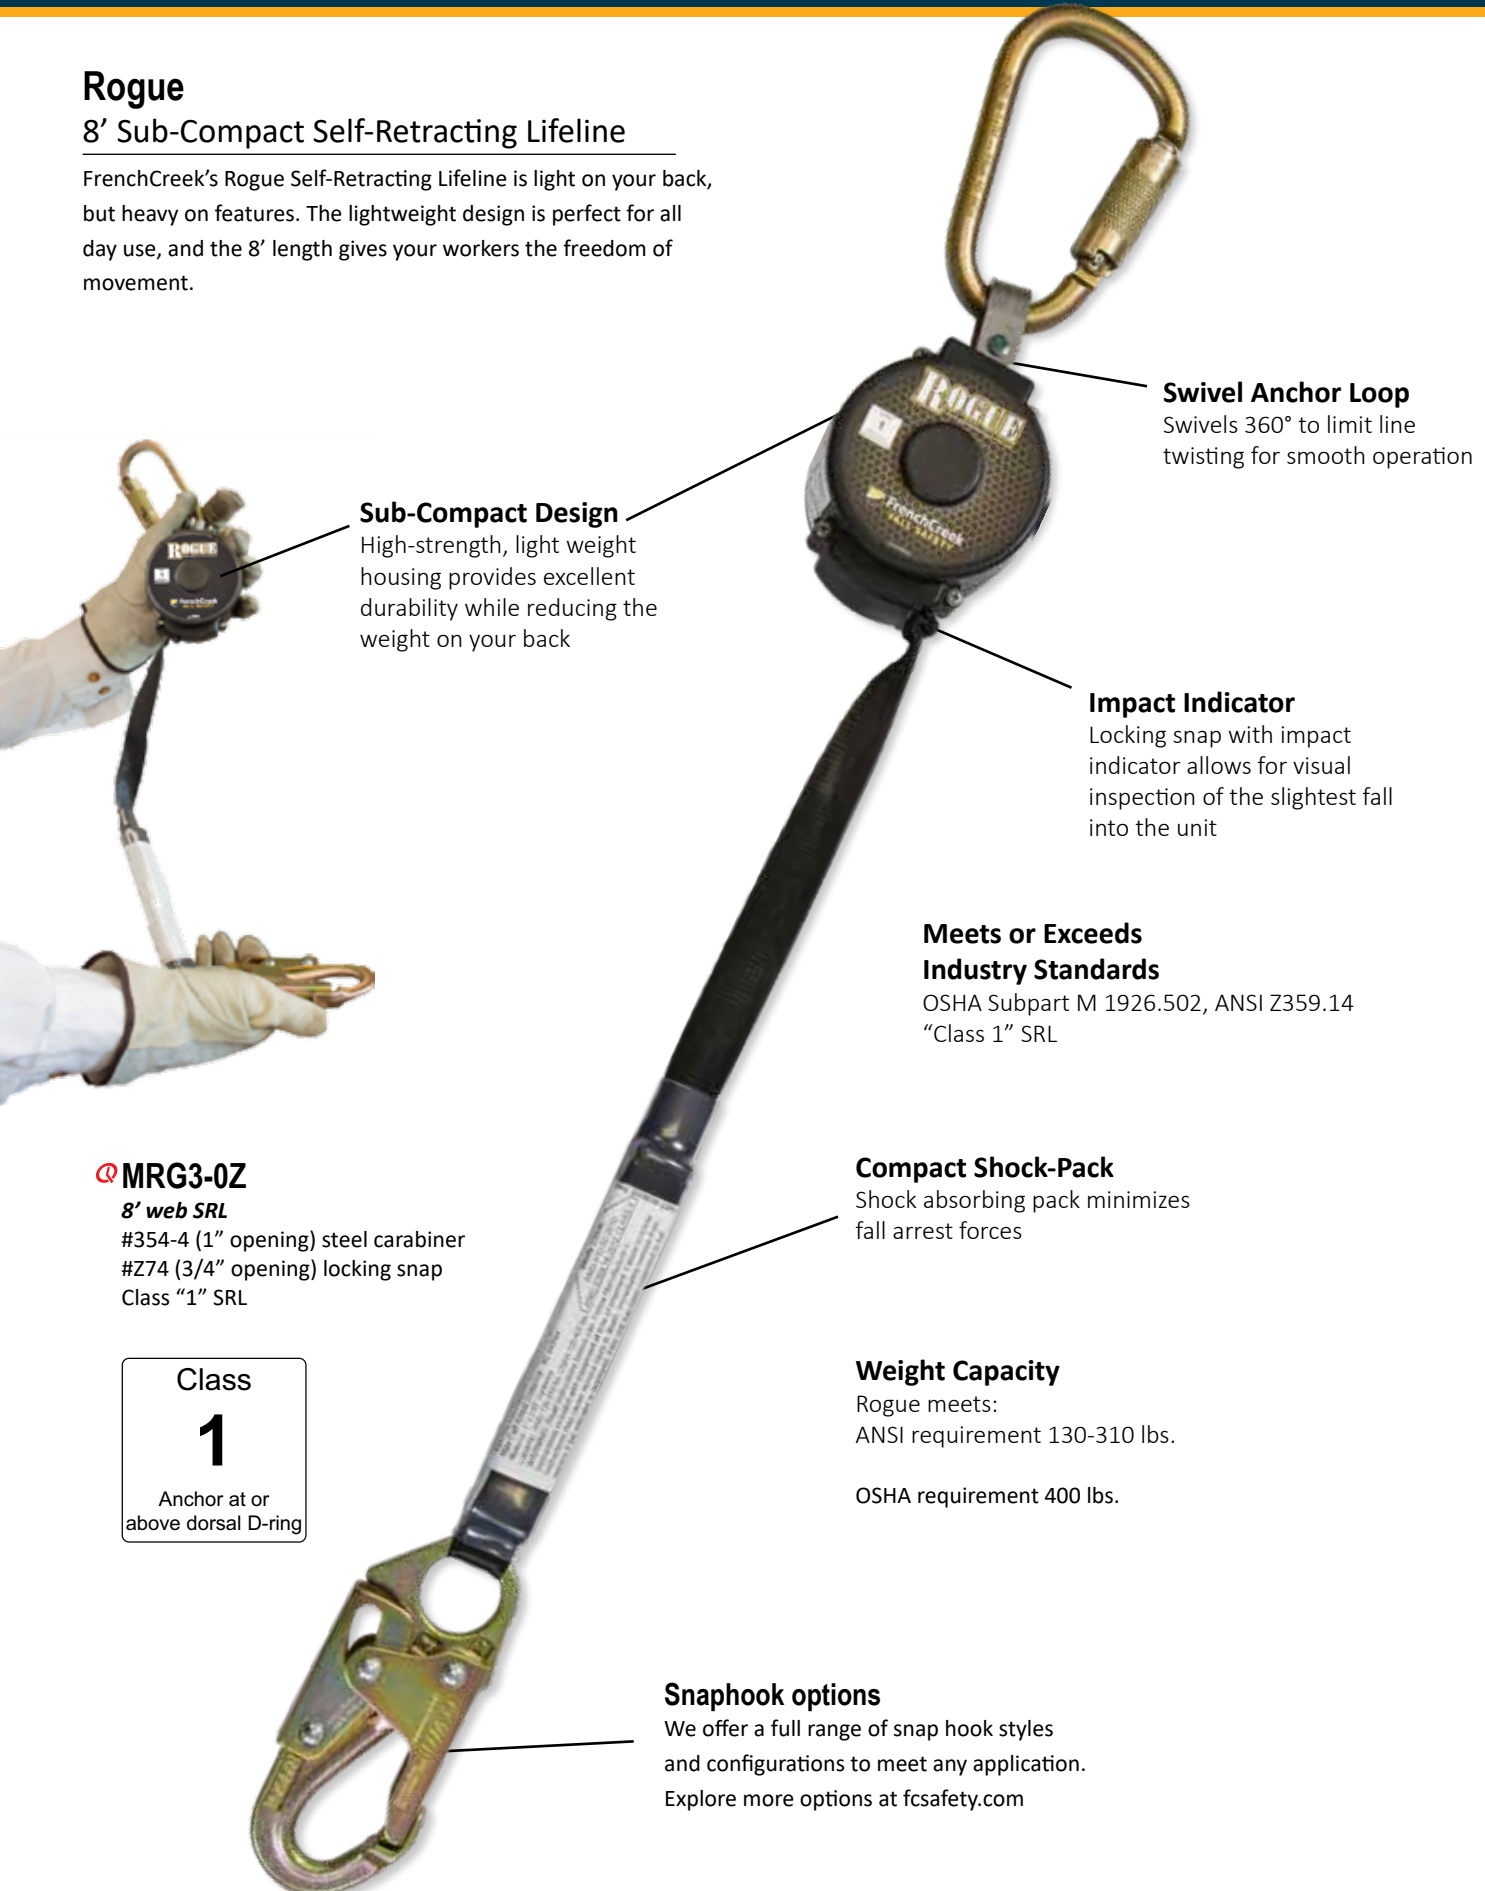

#### Sub-Compact Design

High-strength, light weight housing provides excellent durability while reducing the weight on your back

#### Swivel Anchor Loop

Swivels 360° to limit line twisting for smooth operation

#### Impact Indicator

Locking snap with impact indicator allows for visual inspection of the slightest fall into the unit

#### Meets or Exceeds Industry Standards

OSHA Subpart M 1926.502, ANSI Z359.14  
"Class 1" SRL

#### Compact Shock-Pack

Shock absorbing pack minimizes fall arrest forces

#### Weight Capacity

Rogue meets:  
ANSI requirement 130-310 lbs.

OSHA requirement 400 lbs.

#### Snaphook options

We offer a full range of snap hook styles and configurations to meet any application. Explore more options at [fcsafety.com](http://fcsafety.com)

#### @MRG3-0Z

##### 8' web SRL

#354-4 (1" opening) steel carabiner  
#Z74 (3/4" opening) locking snap  
Class "1" SRL

Class

1

Anchor at or  
above dorsal D-ring

## Rogue Dual-Leg (SRL-P)

### 8' Sub-Compact Self-Retracting Lifeline

The Rogue features a Dual-leg configuration perfect for 100% tie-off allowing a worker to move freely and transition from anchor point to anchor point safely.



#### Q M2RG-4Z

**8' dual-leg web SRL**

#354-4 (1" opening) steel carabiner  
(2) #ZZ136 (2 1/2" opening) locking rebar snaps  
Class "1" SRL

#### Q M2RG-0Z

**8' dual-leg web SRL**

#354-4 (1" opening) steel carabiner  
(2) #Z74 (3/4" opening) locking snap  
Class "1" SRL



#### Q 354-MR

**Dorsal connector for personal SRL's**

Triple action sliding gate

2" open capacity

Two-press to release buttons

\*Optional for quick dual leg connection

### Dual-leg Attachment

The Dual-leg configurations of the Rogue SRL attaches underneath the web loop of the harness, allowing the fall arrest D-Ring to still be usable.

\*354-MR is an optional connector for quick and easy personal SRL attachment.



# OUTLAW

## Self-Retracting Lifelines

### Internal Energy Absorption System

Reduces fall arrest forces and minimizes free fall distance should a fall occur.

### Weight Capacity

Outlaw series meets:  
ANSI requirement 130-310 lbs.

OSHA requirement 400 lbs.

### Swivel Anchor Loop

Swivels 360° to limit line twisting for smooth operation

### Light, Durable Housing

High-strength, light weight housing provides excellent durability

### Short Fall Arrest Activation

Unit will stop a fall within inches, reducing fall distances and reducing fall arrest forces to 1,800 lbs., or less

### Impact Indicator

Locking snap with impact indicator allows for visual inspection of the slightest fall into the unit

### Lifeline Constituents

Choose the cable type to meet the specific needs of your job requirement:  
Galvanized Steel  
Stainless Steel  
Technora® synthetic rope

### Class

# 1

Anchor at or above dorsal D-ring

### Meets or Exceed Industry Standards

OSHA Subpart M 1926.502, ANSI Z359.14-2021



## Outlaw Series

### Self-Retracting Lifeline (XR Series)

The Outlaw Series SRL's provide durability and confidence expected by professionals. With 7, 11, and 30 feet of working capacity and short fall arrest capability, the Outlaw will never let you down.

**XR-7W**



**XR-11G**



**XR-30G**



#### Q XR-7W

**7' web SRL**

#354-4 (1" opening) steel carabiner  
#Z74 (3/4" opening) locking snap  
Class "1" SRL

#### Q XR-11G

**11' galvanized steel cable SRL**

#354-4 (1" opening) steel carabiner  
RL-28 (3/4" opening) locking snap  
Class "1" SRL

**XR-11S**

**11' stainless steel cable SRL**

**XR-11T**

**11' Technora® synthetic rope SRL**

#### Q XR-30G

**30' galvanized steel cable SRL**

#354-4 (1" opening) steel carabiner  
RL-28 (3/4" opening) locking snap  
Class "1" SRL

**XR-30S**

**30' stainless steel cable SRL**

**XR-30T**

**30' Technora® synthetic rope SRL**

# OUTLAW

## Leading Edge Self-Retracting Lifelines

### Internal Energy Absorption System

Reduces fall arrest forces and minimizes free fall distance should a fall occur.

### Weight Capacity

Outlaw series meets:  
ANSI requirement 130-310 lbs.

OSHA requirement 400 lbs.

### Swivel Anchor Loop

Swivels 360° to limit line twisting for smooth operation.

### Light, Durable Housing

High-strength, light weight housing provides excellent durability.

### Leading Edge Shock Pack

Shock pack reduces fall arrest forces. Shock pack free-fall limit 6'. Max elongation distance 48". Reduces fall arrest forces to 1,800 lbs., or less

### Impact Indicator

Locking snap with impact indicator allows for visual inspection of the slightest fall into the unit.

Class

2

Anchor above or below dorsal D-ring

### Meets or Exceed Industry Standards

OSHA Subpart M 1926.502, ANSI Z359.14-2021





## Outlaw Series-Leading Edge Self-Retracting Lifeline (XR Series)

Enter the next level in fall protection with the Outlaw LE SRL, and give your workers confidence while working on the edge.

- ♥ Internal energy absorption system
- ♥ External shock absorbing pack



### Ⓚ XR-50LEG

*50' galvanized cable Leading Edge SRL*  
#354-4 (1" opening) steel carabiner  
RL-28 (3/4" opening) locking snap  
Class "2" SRL



### Ⓚ XR-30LEG

*30' galvanized cable Leading Edge SRL*  
#354-4 (1" opening) steel carabiner  
RL-28 (3/4" opening) locking snap  
Class "2" SRL



### Ⓚ XR-20LEG

*20' galvanized cable Leading Edge SRL*  
#354-4 (1" opening) steel carabiner  
RL-28 (3/4" opening) locking snap  
Class "2" SRL



## RL Series

### Self-Retracting Lifelines

The RL Series feature extreme durability with high mobility. These units offer an extended range of movement with zero slack to eliminate tripping hazards. FrenchCreek recommends periodic inspection of these mechanical units as the internal mechanism's are not field inspectable. Periodic factory inspection further increases your level of safety and adds to the product life.

- ♥ Cast aluminum housing
- ♥ Dual internal inertia braking system
- ♥ Lifeline constituents: galvanized wire, stainless steel, or Technora® rope



Class

**1**

Anchor at or  
above dorsal D-ring



Class

**1**

Anchor at or  
above dorsal D-ring



Class

**1**

Anchor at or  
above dorsal D-ring

#### Ⓚ RL25AGZ

**25' galvanized wire rope SRL**  
#274 (3/4" opening) locking snap  
#354-4 (1" opening) carabiner for anchoring  
Class "1" SRL

#### RL25ASZ

**25' stainless steel wire rope SRL**

#### RL25ATZ

**25' Technora® synthetic rope SRL**

#### Ⓚ RL30G & Ⓚ RL50GZ

**30' or 50' galvanized wire rope SRL**  
#RL-28 (3/4" opening) locking swivel snap  
#354-4 (1" opening) carabiner for anchoring  
Class "1" SRL

#### RL30SS & RL50SS

**30' or 50' stainless steel wire rope SRL**

#### RL30T & RL50T

**30' or 50' Technora® synthetic rope SRL**

#### RL100G

**100' galvanized wire rope SRL**  
#49 (3/4" opening) locking swivel snap  
Class "1" SRL

#### RL100GSS

**100' stainless steel wire rope SRL**

#### RL100T

**100' Technora® synthetic rope SRL**





## CONFINED SPACE SYSTEMS



Shown  
Portable Davit System



## Portable Davit System 3-Piece Portable Base- 60" max width

Designed for manholes & other confined spaces where a portable base is needed.

### Specs

Weight Capacity-  
130-310 lbs ANSI

Capacity- 1 entrant only, 310 lb.  
max

Item weight- 162.75 lbs.

Hardware Material- Powder  
coated aluminum, plated alloy  
steel

Lifeline- Galvanized steel wire  
rope

Standards- OSHA 1926.502  
ANSI 1910.66

### Components

**PD1-** Davit Mast Assembly


**PD2-** Portable Davit Base

**PD3-** R50G Mounting Bracket

**PD4-** MW50G Mounting Bracket

**R50G-** Rescue SRL

**MW50G-** Work Winch

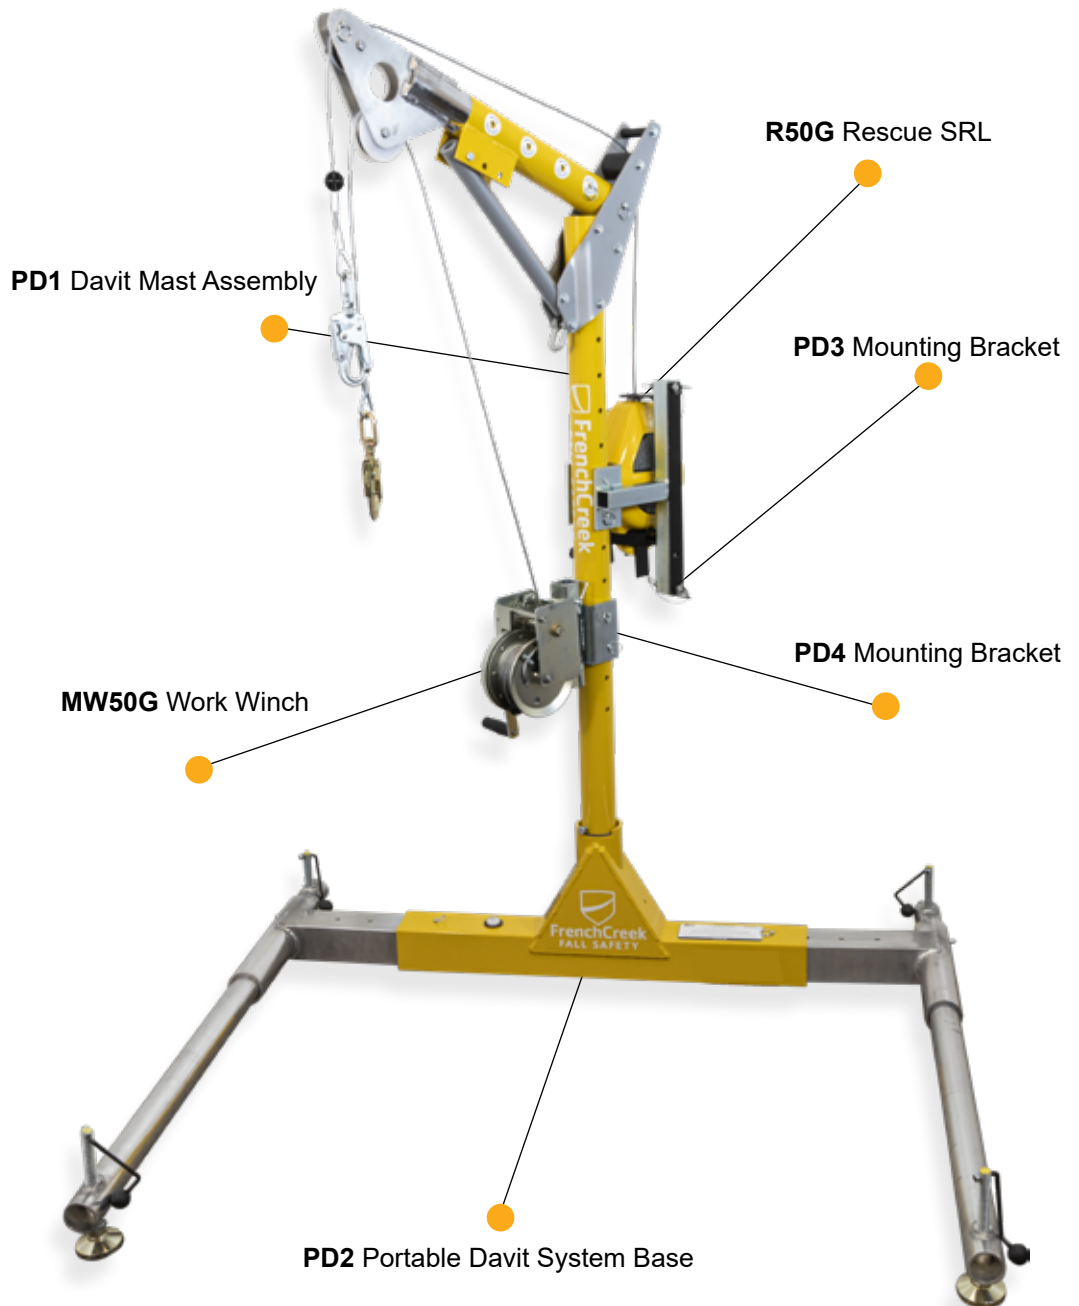

## Ordering Information

### PD1 Davit Mast Assembly 12"-30" offset reach



#### PD1

Davit mast assembly with telescoping adjustability from 12"-30". Includes attachment points for mechanical units. Used in conjunction with FrenchCreek Portable Davit system bases. Item weight 32.75 lbs.

### PD2 Portable Davit System Base "36-60" adjustable base width



#### PD2

3-piece portable davit system base adjusts from 36"-60". For temporary application. Includes bullseye level, tool free height adjustment. Base material: powder-coated aluminum & stainless steel. Item weight 58 lbs.

### PD3 Mounting Bracket Attaches R50G Rescue SRL



#### PD3

Used to attach R50G Rescue SRL to PD1 Davit Mast Assembly. Attaches with locking pins. Material: plated alloy steel. Item weight: 7.2 lbs.

### PD4 Mounting Bracket Attaches MW50G Work Winch



#### PD4

Used to attach MW50G Work Winch to PD1 Davit Mast Assembly. Attaches with locking pins. Material: plated alloy steel. Item weight: 4.8 lbs.

### R50G Rescue SRL ANSI Class SRL-R 3-way unit, 50' length



#### R50G

50' rescue SRL with raising/lowering capability. Mounts to PD1 Davit Mast Assembly using PD3 Mounting Bracket. Includes dual inertia braking system, pulleys & carabiner, load indicating snaphook. Three lifeline options: galvanized steel, stainless steel, technora rope. Aluminum cast housing. Item weight: 35 lbs.

### MW50G Work Winch 50' length



#### MW50G

Offers raising and lowering capabilities with a friction brake that prevents the unit from free-wheeling when under a load. Mounts to PD1 Davit Mast Assembly using PD4 Mounting Bracket. Includes pulleys, carabiner and swivel snaphook. Three lifeline options: galvanized steel, stainless steel, technora rope. Aluminum cast housing. Item weight: 25 lbs.

## Portable Davit System Core Mount Sleeve Base- 9" deep sleeve

Ideally suited for recurrent access locations where mast can be easily moved.

### Specs

Weight Capacity-  
130-310 lbs. ANSI

Capacity- 1 entrant only, 310 lb.  
max

Item weight- 114 lbs.

Hardware Material- Powder  
coated aluminum, plated alloy  
steel

Lifeline- Galvanized steel wire  
rope

Standards- OSHA 1926.502  
ANSI 1910.66

### Components

**PD1-** Davit Mast Assembly


**PD5-** Davit Core Mount Sleeve

**PD3-** R50G Mounting Bracket

**PD4-** MW50G Mounting Bracket

**R50G-** Rescue SRL

**MW50G-** Work Winch

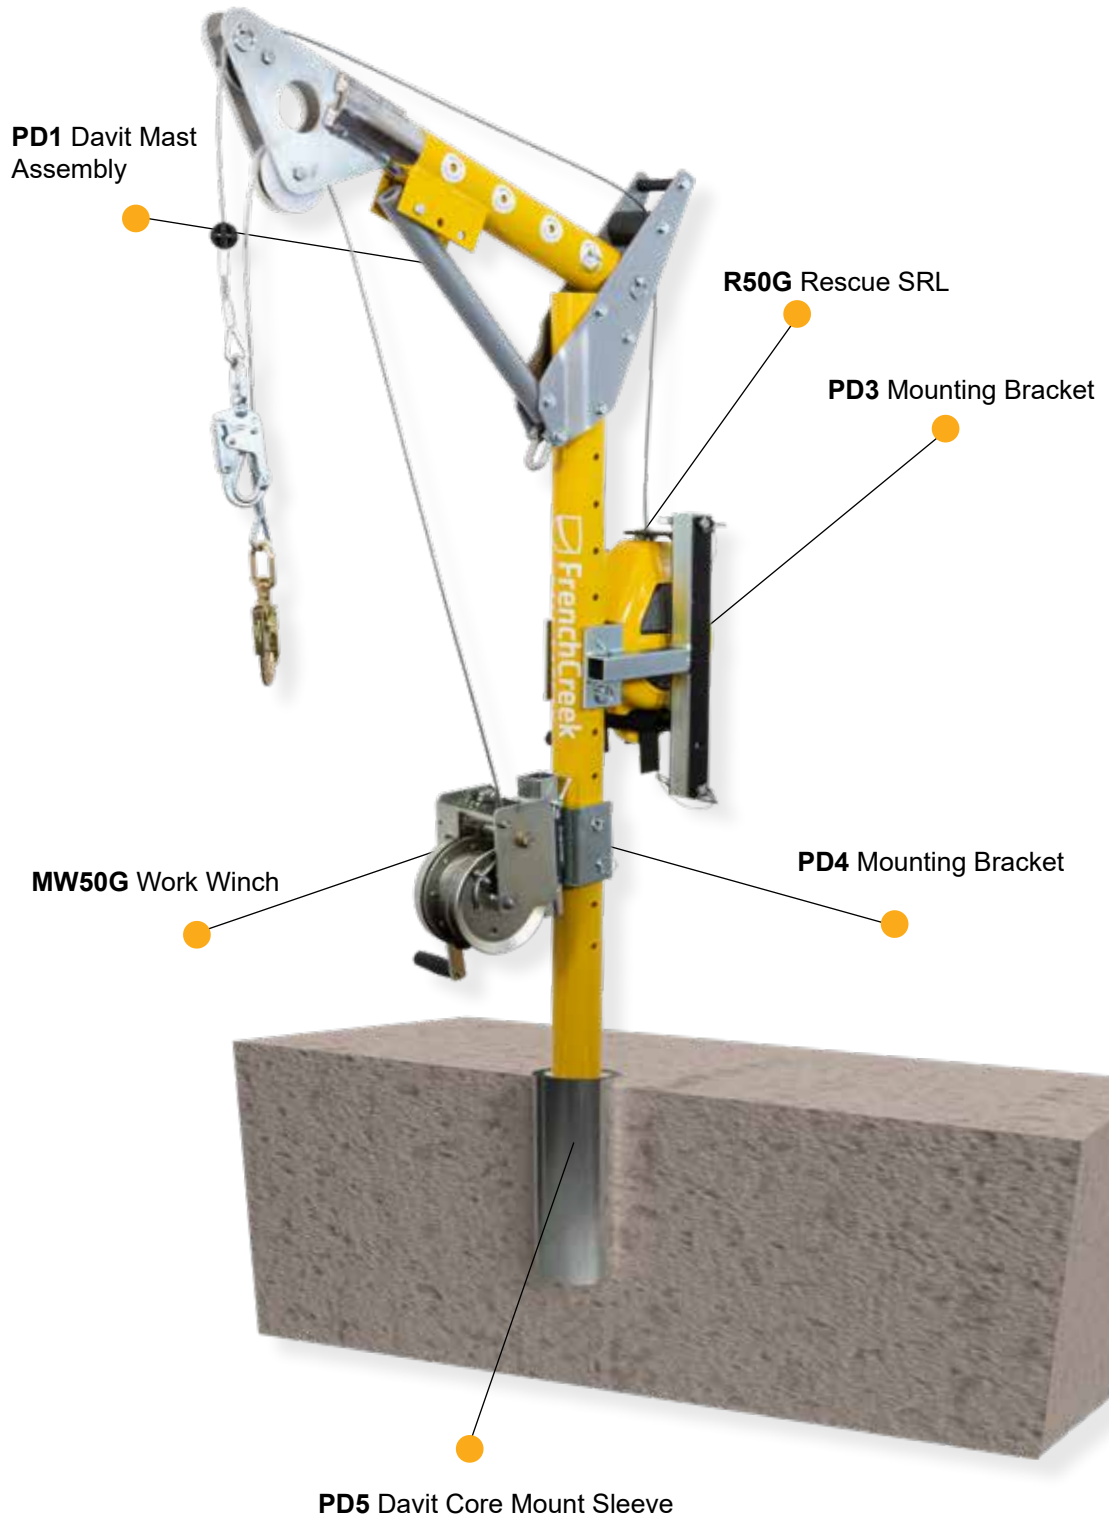



## Ordering Information

### PD1 Davit Mast Assembly 12"-30" offset reach



#### PD1

Davit mast assembly with telescoping adjustability from 12"-30". Includes attachment points for mechanical units. Used in conjunction with FrenchCreek Portable Davit system bases. Item weight 32.75 lbs.

### PD5 Core Mount Sleeve Base Fits 4" (0.10m) diameter core hole



#### PD5

Designed for slip-in installation sleeve fits 4" diameter core hole. Sleeve 9" deep with PVC insert. Allows for 360° rotation of PD1 Davit Mast Assembly. Item weight: 9.7 lbs.

### PD3 Mounting Bracket Attaches R50G Rescue SRL



#### PD3

Used to attach R50G Rescue SRL to PD1 Davit Mast Assembly. Attaches with locking pins. Material: plated alloy steel. Item weight: 7.2 lbs.

### PD4 Mounting Bracket Attaches MW50G Work Winch



#### PD4

Used to attach MW50G Work Winch to PD1 Davit Mast Assembly. Attaches with locking pins. Material: plated alloy steel. Item weight: 4.8 lbs.

### R50G Rescue SRL ANSI Class SRL-R 3-way unit, 50' length



#### R50G

50' rescue SRL with raising/lowering capability. Mounts to PD1 Davit Mast Assembly using PD3 Mounting Bracket. Includes dual inertia braking system, pulleys & carabiner, load indicating snaphook. Three lifeline options: galvanized steel, stainless steel, technora rope. Aluminum cast housing. Item weight: 35 lbs.

### MW50G Work Winch 50' length



#### MW50G

Offers raising and lowering capabilities with a friction brake that prevents the unit from free-wheeling when under a load. Mounts to PD1 Davit Mast Assembly using PD4 Mounting Bracket. Includes pulleys, carabiner and swivel snaphook. Three lifeline options: galvanized steel, stainless steel, technora rope. Aluminum cast housing. Item weight: 25 lbs.

## Portable Davit System Floor Mount Cast-In-Place Base- 8"x12" Plate

Ideally suited for high traffic areas to reduce tripping hazards. Cast-in for new concrete construction.

### Specs

Weight Capacity-  
130-310 lbs. ANSI

Capacity- 1 entrant only, 310 lb.  
max

Item weight- 127 lbs.

Hardware Material- Powder  
coated aluminum, plated alloy  
steel

Lifeline- Galvanized steel wire  
rope

Standards- OSHA 1926.502  
ANSI 1910.66

### Components

**PD1-** Davit Mast Assembly


**PD6-** Floor Mount Cast-In-Place  
Base

**PD3-** R50G Mounting Bracket

**PD4-** MW50G Mounting Bracket

**R50G-** Rescue SRL

**MW50G-** Work Winch

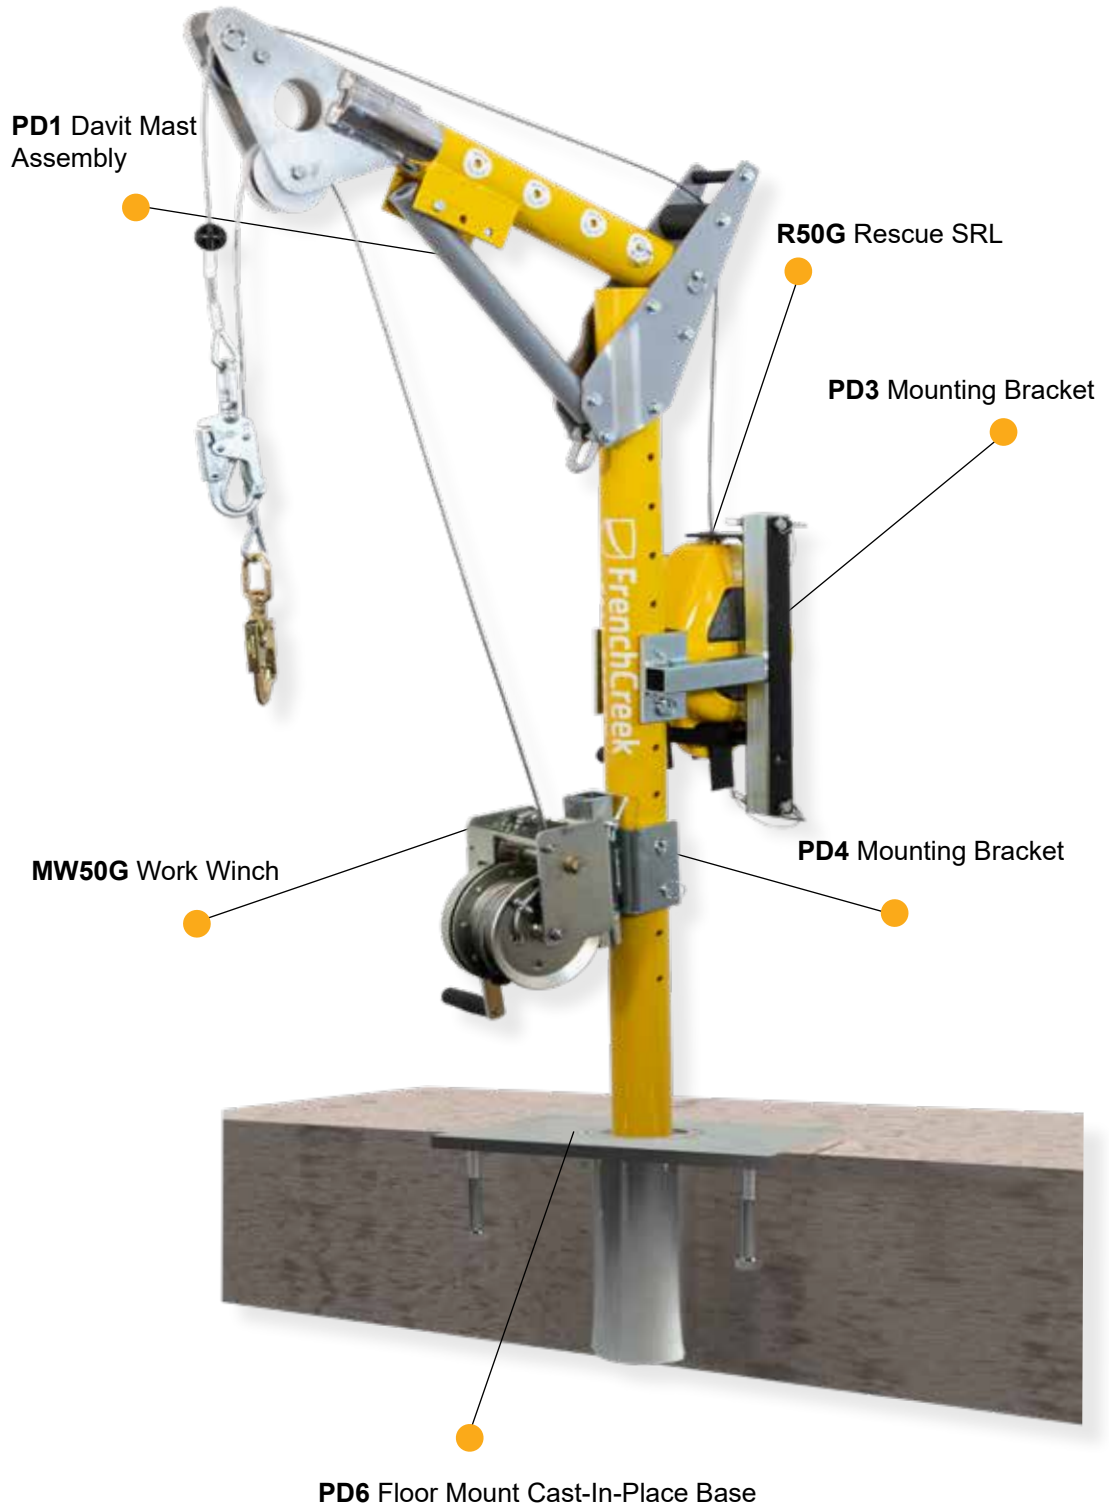

## Ordering Information

### PD1 Davit Mast Assembly 12"-30" offset reach



#### PD1

Davit mast assembly with telescoping adjustability from 12"-30". Includes attachment points for mechanical units. Used in conjunction with FrenchCreek Portable Davit system bases. Item weight 32.75 lbs.

### PD6 Floor Mount Cast-In-Place Base 8"x12" plate with 4" support rods



#### PD6

Cast-in design for new concrete construction installation. Allows for 360° rotation of PD1 Davit Mast Assembly. 9" deep sleeve with PVC insert. Item weight: 22 lbs.

### PD3 Mounting Bracket Attaches R50G Rescue SRL



#### PD3

Used to attach R50G Rescue SRL to PD1 Davit Mast Assembly. Attaches with locking pins. Material: plated alloy steel. Item weight: 7.2 lbs.

### PD4 Mounting Bracket Attaches MW50G Work Winch



#### PD4

Used to attach MW50G Work Winch to PD1 Davit Mast Assembly. Attaches with locking pins. Material: plated alloy steel. Item weight: 4.8 lbs.

### R50G Rescue SRL ANSI Class SRL-R 3-way unit, 50' length



#### R50G

50' rescue SRL with raising/lowering capability. Mounts to PD1 Davit Mast Assembly using PD3 Mounting Bracket. Includes dual inertia braking system, pulleys & carabiner, load indicating snaphook. Three lifeline options: galvanized steel, stainless steel, technora rope. Aluminum cast housing. Item weight: 35 lbs.

### MW50G Work Winch 50' length



#### MW50G

Offers raising and lowering capabilities with a friction brake that prevents the unit from free-wheeling when under a load. Mounts to PD1 Davit Mast Assembly using PD4 Mounting Bracket. Includes pulleys, carabiner and swivel snaphook. Three lifeline options: galvanized steel, stainless steel, technora rope. Aluminum cast housing. Item weight: 25 lbs.



## Portable Davit System Floor Mount Sleeve Base- 9" Tall Sleeve Insert

Designed for confined space entry and rescue when recurring access is needed for concrete or structural steel.

### Specs

Weight Capacity-  
130-310 lbs. ANSI

Capacity- 1 entrant only, 310 lb.  
max

Item weight- 136.75 lbs.

Hardware Material- Powder  
coated aluminum, plated alloy  
steel

Lifeline- Galvanized steel wire  
rope

Standards- OSHA 1926.502  
ANSI 1910.66

### Components

**PD1-** Davit Mast Assembly


**PD7-** Floor Mount Sleeve Base

**PD3-** R50G Mounting Bracket

**PD4-** MW50G Mounting Bracket

**R50G-** Rescue SRL

**MW50G-** Work Winch

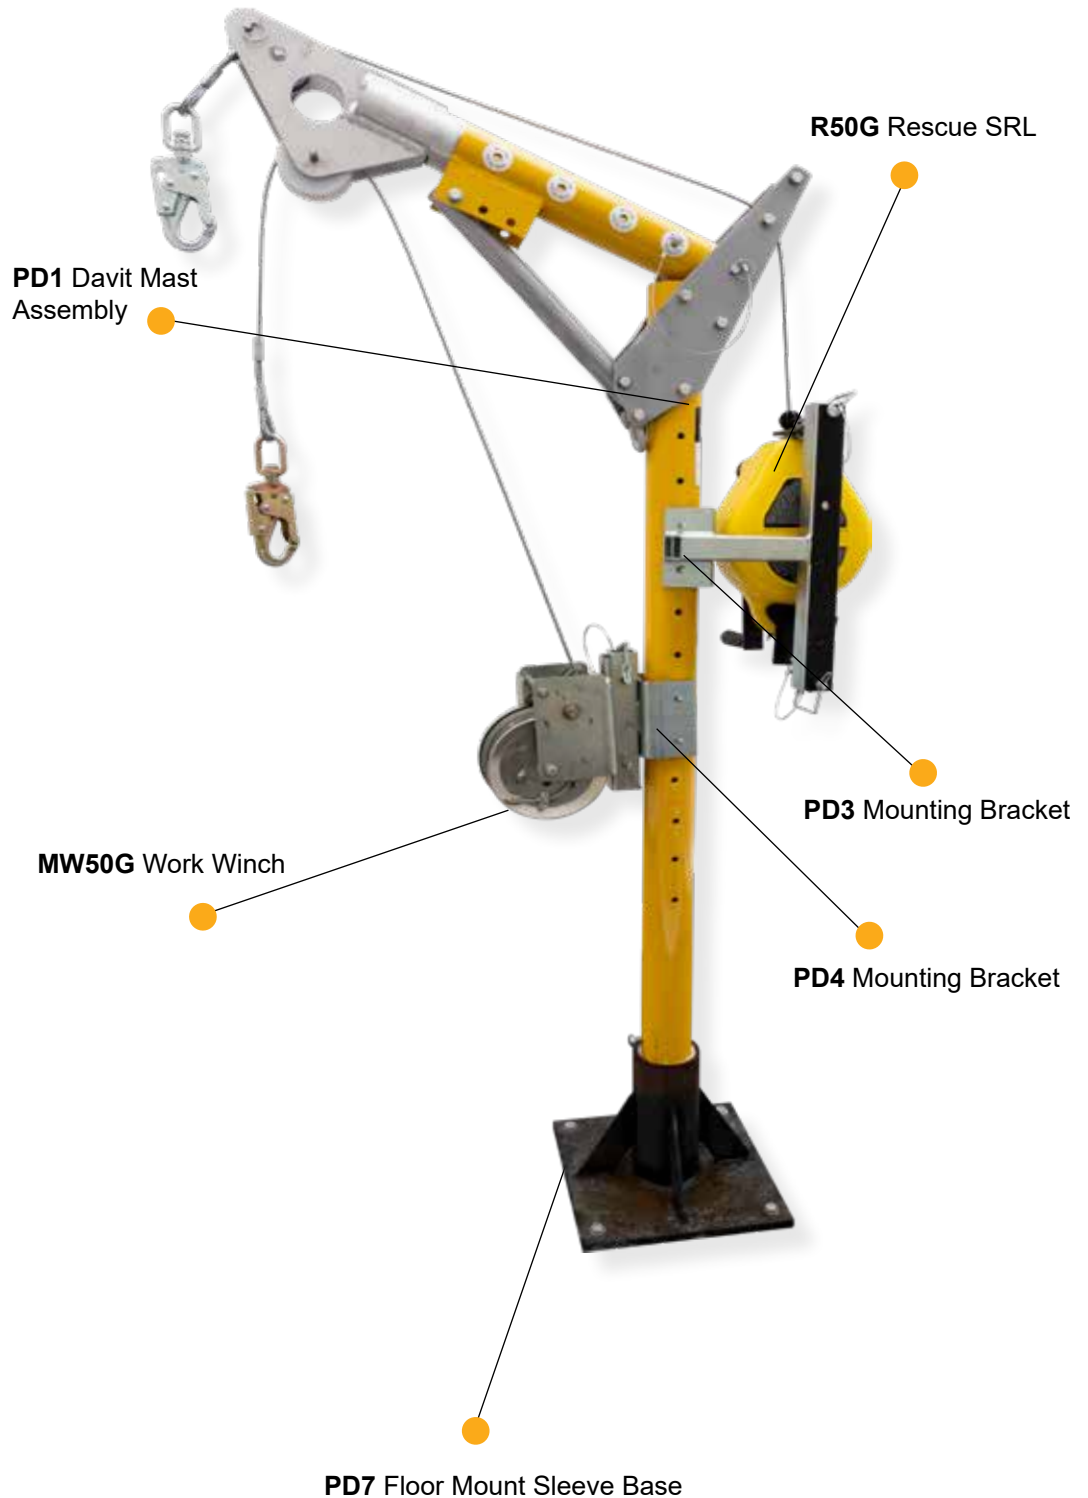

## Ordering Information

### PD1 Davit Mast Assembly 12"-30" offset reach



#### PD1

Davit mast assembly with telescoping adjustability from 12"-30". Includes attachment points for mechanical units. Used in conjunction with FrenchCreek Portable Davit system bases. Item weight 32.75 lbs.

### PD7 Floor Mount Sleeve Base 9" Deep Sleeve Insert



#### PD7

Bolt on design for existing steel and concrete installation. Allows for 360° rotation of PD1 Davit Mast Assembly. 9" tall sleeve with PVC insert. Item weight: 32 lbs.

### PD3 Mounting Bracket Attaches R50G Rescue SRL



#### PD3

Used to attach R50G Rescue SRL to PD1 Davit Mast Assembly. Attaches with locking pins. Material: plated alloy steel. Item weight: 7.2 lbs.

### PD4 Mounting Bracket Attaches MW50G Work Winch



#### PD4

Used to attach MW50G Work Winch to PD1 Davit Mast Assembly. Attaches with locking pins. Material: plated alloy steel. Item weight: 4.8 lbs.

### R50G Rescue SRL ANSI Class SRL-R 3-way unit, 50' length



#### R50G

50' rescue SRL with raising/lowering capability. Mounts to PD1 Davit Mast Assembly using PD3 Mounting Bracket. Includes dual inertia braking system, pulleys & carabiner, load indicating snaphook. Three lifeline options: galvanized steel, stainless steel, technora rope. Aluminum cast housing. Item weight: 35 lbs.

### MW50G Work Winch 50' length



#### MW50G

Offers raising and lowering capabilities with a friction brake that prevents the unit from free-wheeling when under a load. Mounts to PD1 Davit Mast Assembly using PD4 Mounting Bracket. Includes pulleys, carabiner and swivel snaphook. Three lifeline options: galvanized steel, stainless steel, technora rope. Aluminum cast housing. Item weight: 25 lbs.

## Portable Davit System Wall Mount Sleeve Base- 9" Tall Sleeve Insert

Designed for confined space entry and rescue for vertical concrete or steel structures. Can be bolted or welded.

### Specs

Weight Capacity-  
130-310 lbs. ANSI

Capacity- 1 entrant only, 310 lb.  
max

Item weight- 117.75 lbs.

Hardware Material- Powder  
coated aluminum, plated alloy  
steel

Lifeline- Galvanized steel wire  
rope

Standards- OSHA 1926.502  
ANSI 1910.66

### Components

**PD1-** Davit Mast Assembly


**PD8-** Wall Mount Sleeve

**PD3-** R50G Mounting Bracket

**PD4-** MW50G Mounting Bracket

**R50G-** Rescue SRL

**MW50G-** Work Winch

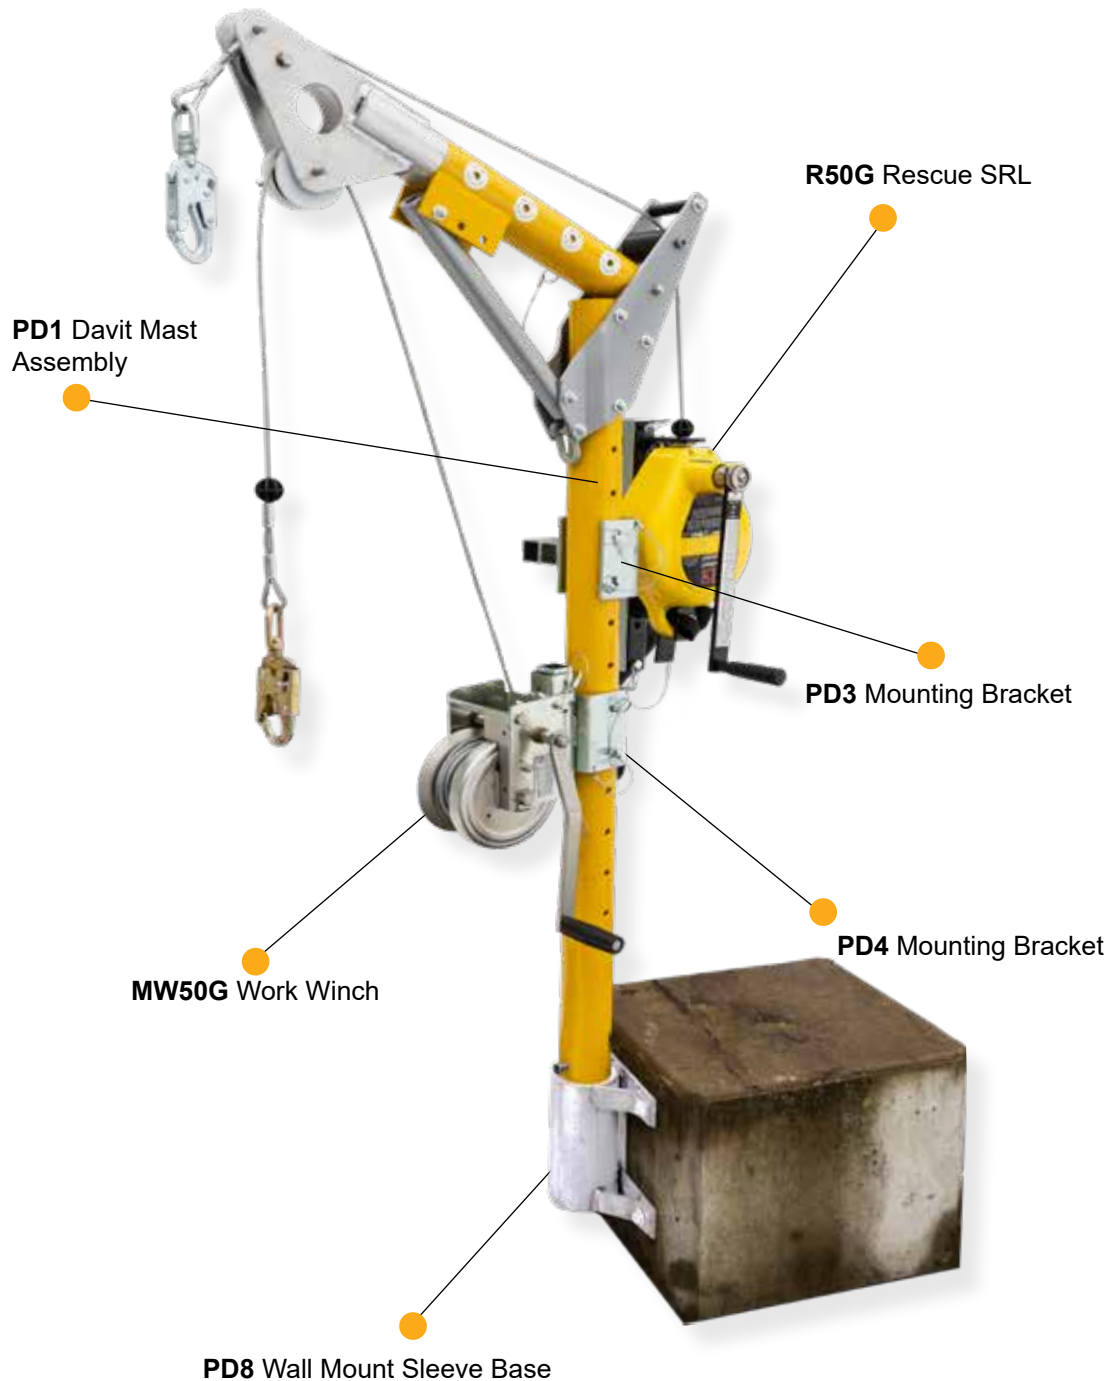



## Ordering Information

### PD1 Davit Mast Assembly

12"-30" offset reach



### PD1

Davit mast assembly with telescoping adjustability from 12"-30". Includes attachment points for mechanical units. Used in conjunction with FrenchCreek Portable Davit system bases. Item weight 32.75 lbs.

### PD8 Wall Mount Sleeve Base

9" Deep Sleeve Insert



### PD8

Bolt on design for existing steel and concrete vertical installation. Allows for 360° rotation of PD1 Davit Mast Assembly. 9" tall sleeve with PVC insert. Item weight: 13 lbs.

### PD3 Mounting Bracket

Attaches R50G Rescue SRL



### PD3

Used to attach R50G Rescue SRL to PD1 Davit Mast Assembly. Attaches with locking pins. Material: plated alloy steel. Item weight: 7.2 lbs.

### PD4 Mounting Bracket

Attaches MW50G Work Winch



### PD4

Used to attach MW50G Work Winch to PD1 Davit Mast Assembly. Attaches with locking pins. Material: plated alloy steel. Item weight: 4.8 lbs.

### R50G Rescue SRL

ANSI Class SRL-R  
3-way unit, 50' length



### R50G

50' rescue SRL with raising/lowering capability. Mounts to PD1 Davit Mast Assembly using PD3 Mounting Bracket. Includes dual inertia braking system, pulleys & carabiner, load indicating snaphook. Three lifeline options: galvanized steel, stainless steel, technora rope. Aluminum cast housing. Item weight: 35 lbs.

### MW50G Work Winch

50' length



### MW50G

Offers raising and lowering capabilities with a friction brake that prevents the unit from free-wheeling when under a load. Mounts to PD1 Davit Mast Assembly using PD4 Mounting Bracket. Includes pulleys, carabiner and swivel snaphook. Three lifeline options: galvanized steel, stainless steel, technora rope. Aluminum cast housing. Item weight: 25 lbs.

## Portable Davit System Barrel Mount Davit Base- 1/2" to 3-1/2" thick

Designed for bolt on installation to existing edges, walls and other properly rated structures.

### Specs

Weight Capacity-  
130-310 lbs. ANSI

Capacity- 1 entrant only, 310 lb.  
max

Item weight- 136.75 lbs.

Hardware Material- Powder  
coated aluminum, plated alloy  
steel

Lifeline- Galvanized steel wire  
rope

Standards- OSHA 1926.502  
ANSI 1910.66

### Components

**PD1-** Davit Mast Assembly


**PD9-** Barrel Mount Davit Base

**PD3-** R50G Mounting Bracket

**PD4-** MW50G Mounting Bracket

**R50G-** Rescue SRL

**MW50G-** Work Winch

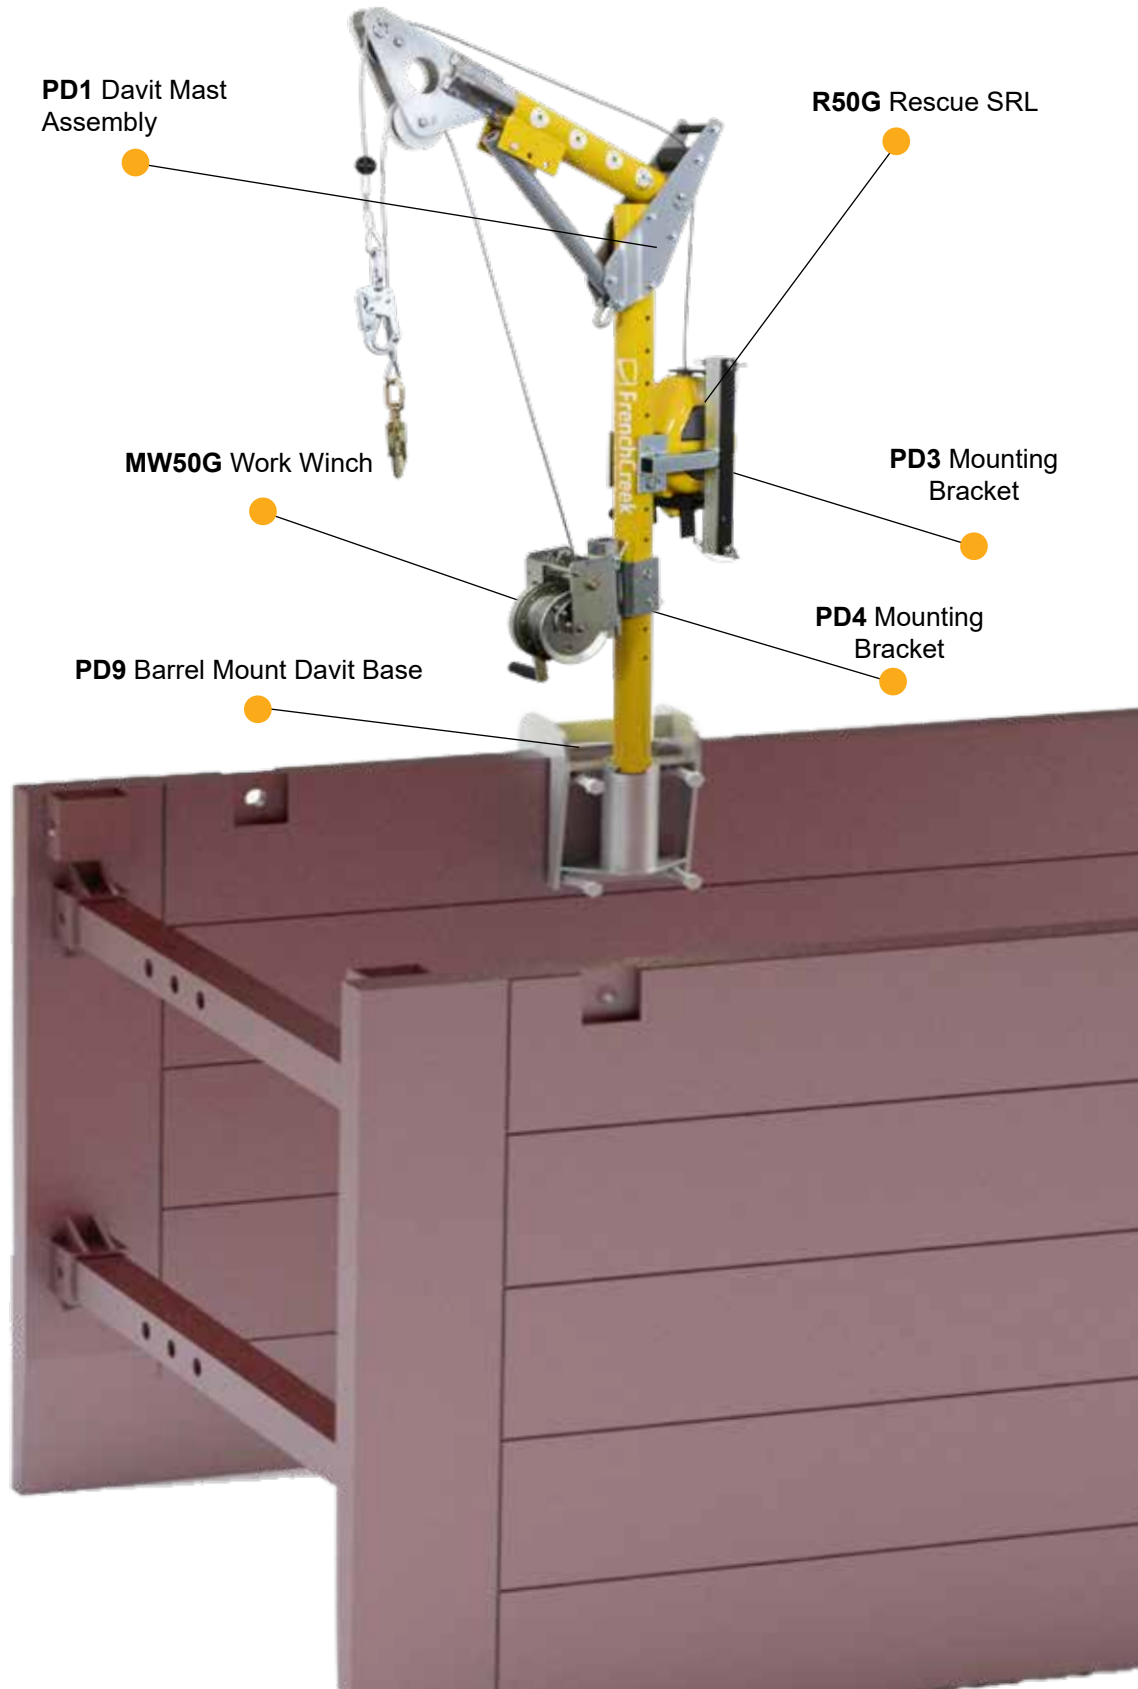

## Ordering Information

### PD1 Davit Mast Assembly

12"-30" offset reach



### PD1

Davit mast assembly with telescoping adjustability from 12"-30". Includes attachment points for mechanical units. Used in conjunction with FrenchCreek Portable Davit system bases. Item weight 32.75 lbs.

### PD9 Barrel Mount Davit Base

Attaches to properly rated structures  
1/2" to 3-1/2" thick.



### PD9

Attaches to properly rated structures  
1/2" to 3-1/2" thick. 4pcs. 3/4" x 5" hex head set screws for securing to structure. Zinc plated welded steel construction with PVC mast sleeve insert. 180° mast rotation. 9" tall sleeve PVC insert. Item weight 32 lbs.

### PD3 Mounting Bracket

Attaches R50G Rescue SRL



### PD3

Used to attach R50G Rescue SRL to PD1 Davit Mast Assembly. Attaches with locking pins. Material: plated alloy steel. Item weight: 7.2 lbs.

### PD4 Mounting Bracket

Attaches MW50G Work Winch



### PD4

Used to attach MW50G Work Winch to PD1 Davit Mast Assembly. Attaches with locking pins. Material: plated alloy steel. Item weight: 4.8 lbs.

### R50G Rescue SRL

ANSI Class SRL-R  
3-way unit, 50' length



### R50G

50' rescue SRL with raising/lowering capability. Mounts to PD1 Davit Mast Assembly using PD3 Mounting Bracket. Includes dual inertia braking system, pulleys & carabiner, load indicating snaphook. Three lifeline options: galvanized steel, stainless steel, technora rope. Aluminum cast housing. Item weight: 35 lbs.

### MW50G Work Winch

50' length



### MW50G

Offers raising and lowering capabilities with a friction brake that prevents the unit from free-wheeling when under a load. Mounts to PD1 Davit Mast Assembly using PD4 Mounting Bracket. Includes pulleys, carabiner and swivel snaphook. Three lifeline options: galvanized steel, stainless steel, technora rope. Aluminum cast housing. Item weight: 25 lbs.



## Portable Davit System

### Hitch Mount System- For Class 3 Minimum Vehicle Trailer Hitch

Designed to be used as a portable anchorage connector. Commonly used with rescue vehicles.

#### Specs

Weight Capacity-  
130-310 lbs. ANSI

Capacity- 1 entrant only, 310 lb.  
max

Item weight- 158.75 lbs.

Hardware Material- Powder  
coated aluminum, plated alloy  
steel

Lifeline- Galvanized steel wire  
rope

Standards- OSHA 1926.502  
ANSI 1910.66

#### Components

**PD1-** Davit Mast Assembly


**PD10-** Hitch Mount System

**PD3-** R50G Mounting Bracket

**PD4-** MW50G Mounting Bracket

**R50G-** Rescue SRL

**MW50G-** Work Winch

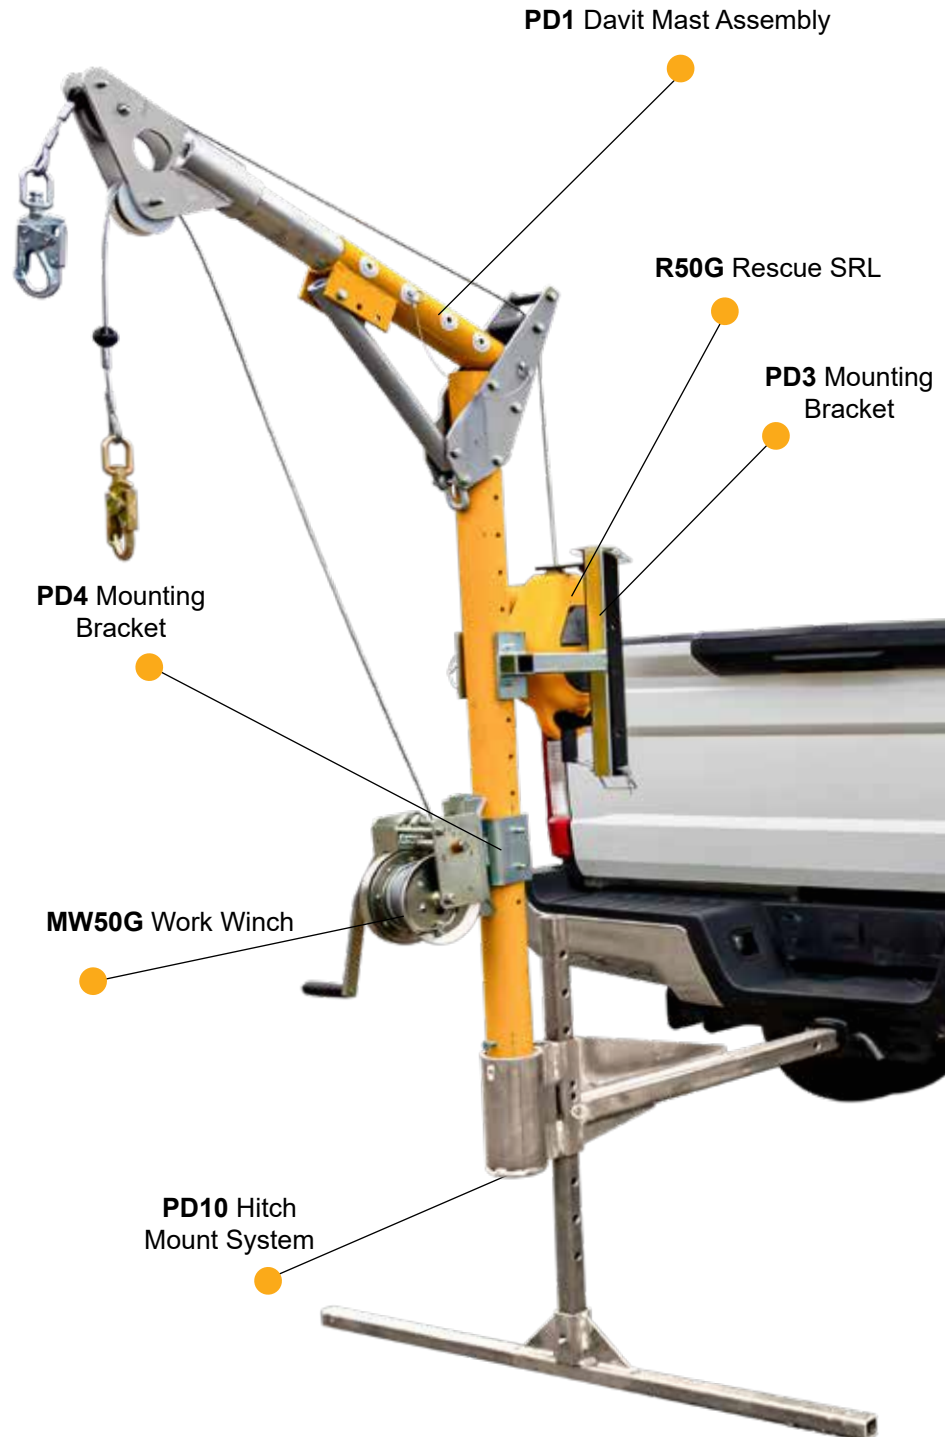

## Ordering Information

### PD1 Davit Mast Assembly 12"-30" offset reach



#### PD1

Davit mast assembly with telescoping adjustability from 12"-30". Includes attachment points for mechanical units. Used in conjunction with FrenchCreek Portable Davit system bases. Item weight 32.75 lbs.

### PD10 Hitch Mount System Installs into class 3 minimum vehicle trailer hitch.



#### PD10

Installs into class 3 minimum vehicle trailer hitch, 2" square receiver. 6"-30" height adjustment range provided in 1" increments. 9" tall plated carbon sleeve with insert. Compatible with PD1 Davit Mast Assembly. Weight 54 lbs.

### PD3 Mounting Bracket Attaches R50G Rescue SRL



#### PD3

Used to attach R50G Rescue SRL to PD1 Davit Mast Assembly. Attaches with locking pins. Material: plated alloy steel. Item weight: 7.2 lbs.

### PD4 Mounting Bracket Attaches MW50G Work Winch



#### PD4

Used to attach MW50G Work Winch to PD1 Davit Mast Assembly. Attaches with locking pins. Material: plated alloy steel. Item weight: 4.8 lbs.

### R50G Rescue SRL ANSI Class SRL-R 3-way unit, 50' length



#### R50G

50' rescue SRL with raising/lowering capability. Mounts to PD1 Davit Mast Assembly using PD3 Mounting Bracket. Includes dual inertia braking system, pulleys & carabiner, load indicating snaphook. Three lifeline options: galvanized steel, stainless steel, technora rope. Aluminum cast housing. Item weight: 35 lbs.

### MW50G Work Winch 50' length



#### MW50G

Offers raising and lowering capabilities with a friction brake that prevents the unit from free-wheeling when under a load. Mounts to PD1 Davit Mast Assembly using PD4 Mounting Bracket. Includes pulleys, carabiner and swivel snaphook. Three lifeline options: galvanized steel, stainless steel, technora rope. Aluminum cast housing. Item weight: 25 lbs.

## Portable Davit System

### Adjustable Barrel Mount (Trench-Box) - For rated structures 3"-24" thick

Designed to be used as a portable anchorage connector. Commonly used with rescue vehicles.

#### Specs

Weight Capacity-  
130-310 lbs. ANSI

Capacity- 1 entrant only, 310 lb.  
max

Item weight- 152.75 lbs.

Hardware Material- Powder  
coated aluminum, plated alloy  
steel

Lifeline- Galvanized steel wire  
rope

Standards- OSHA 1926.502  
ANSI 1910.66

#### Components

**PD1-** Davit Mast Assembly


**PD11-** Barrel Mount

**PD3-** R50G Mounting Bracket

**PD4-** MW50G Mounting Bracket

**R50G-** Rescue SRL

**MW50G-** Work Winch

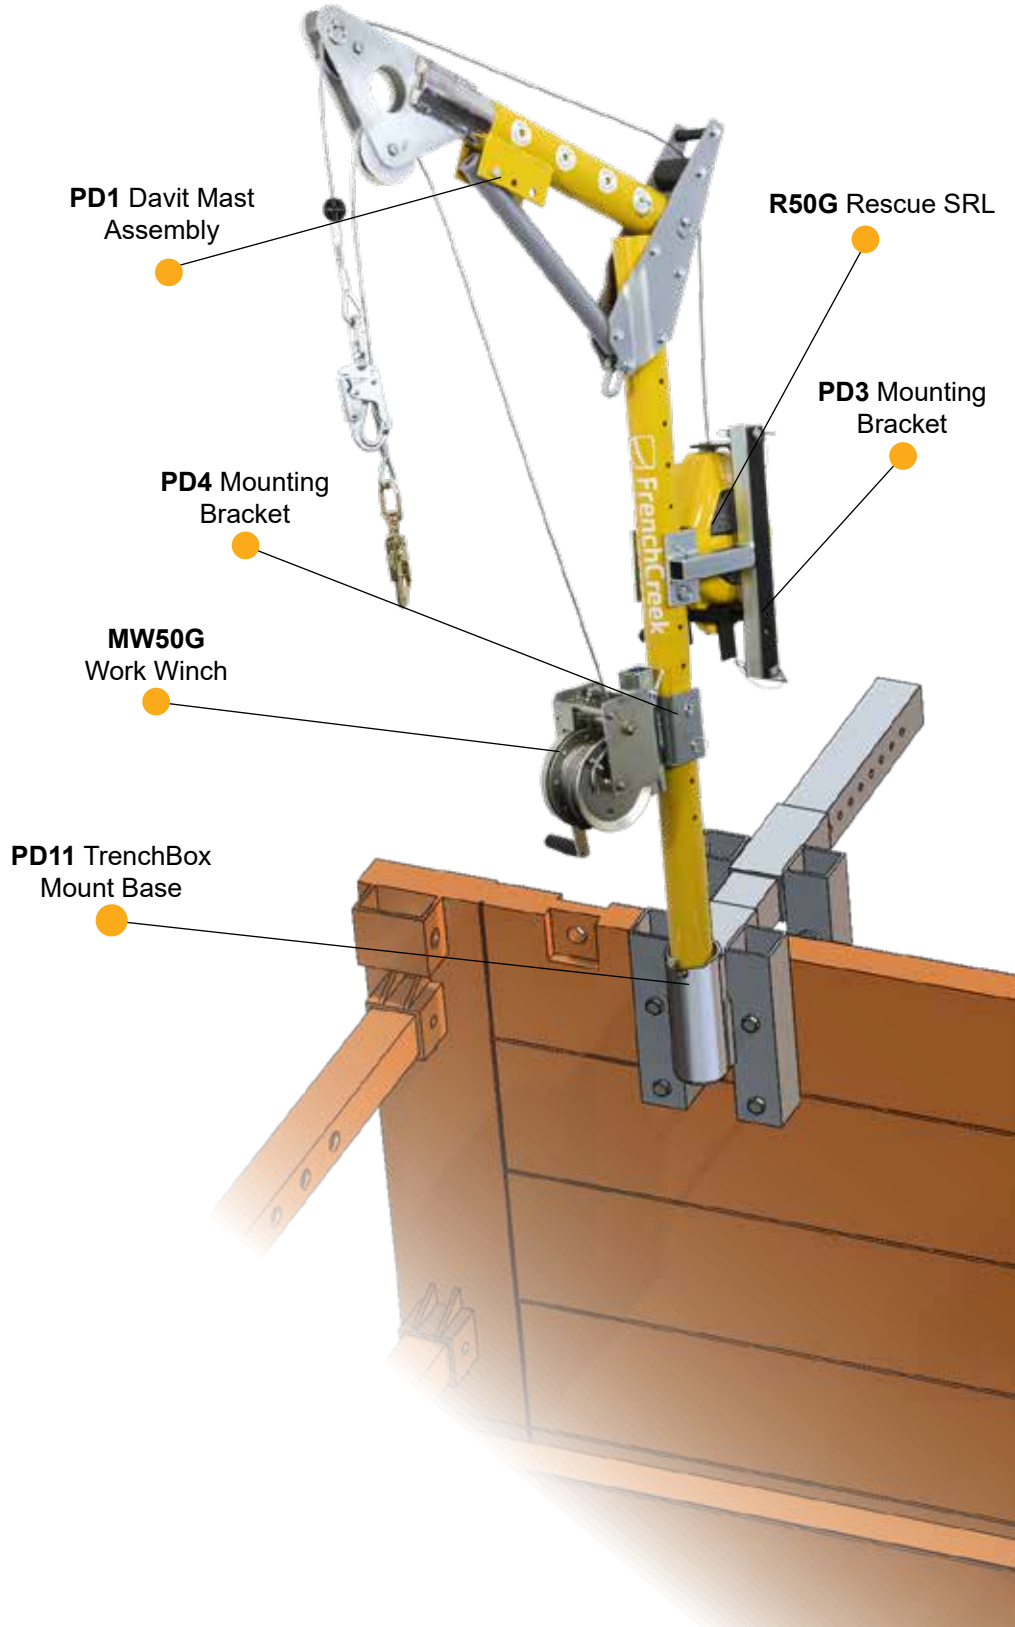



## Ordering Information

### **PD1 Davit Mast Assembly** 12"-30" offset reach



#### **PD1**

Davit mast assembly with telescoping adjustability from 12"-30". Includes attachment points for mechanical units. Used in conjunction with FrenchCreek Portable Davit system bases. Item weight 32.75 lbs.

### **PD11 Barrel (Trench-Box) Mount** For properly rated structures 3 to 24" thick



#### **PD11**

For properly rated structures 3 to 24" thick. Adjustable from 3"-24". Weight capacity 130-310 lbs. ANSI. Hardware material zinc plated alloy steel, and 6061-t6 aluminum. Compatible with PD1 Davit Mast Assembly. Weight 48 lbs.

### **PD3 Mounting Bracket** Attaches R50G Rescue SRL



#### **PD3**

Used to attach R50G Rescue SRL to PD1 Davit Mast Assembly. Attaches with locking pins. Material: plated alloy steel. Item weight: 7.2 lbs.

### **PD4 Mounting Bracket** Attaches MW50G Work Winch



#### **PD4**

Used to attach MW50G Work Winch to PD1 Davit Mast Assembly. Attaches with locking pins. Material: plated alloy steel. Item weight: 4.8 lbs.

### **R50G Rescue SRL** ANSI Class SRL-R 3-way unit, 50' length



#### **R50G**

50' rescue SRL with raising/lowering capability. Mounts to PD1 Davit Mast Assembly using PD3 Mounting Bracket. Includes dual inertia braking system, pulleys & carabiner, load indicating snaphook. Three lifeline options: galvanized steel, stainless steel, technora rope. Aluminum cast housing. Item weight: 35 lbs.

### **MW50G Work Winch** 50' length



#### **MW50G**

Offers raising and lowering capabilities with a friction brake that prevents the unit from free-wheeling when under a load. Mounts to PD1 Davit Mast Assembly using PD4 Mounting Bracket. Includes pulleys, carabiner and swivel snaphook. Three lifeline options: galvanized steel, stainless steel, technora rope. Aluminum cast housing. Item weight: 25 lbs.

## Tripod

### Confined Space Systems

The FrenchCreek tripod system incorporates a lightweight design that is capable of withstanding 5,000 lbs. of vertical load, making it easy to transport to those tight confined spaces.

## Complete Systems

### Q S50G7

TP7 tripod  
R50G rescue unit

### S50SS7

TP7 tripod  
R50SS rescue unit

### Q R50GTP7

TP7 tripod  
R50G rescue unit  
#204 carry bag

### R50SSTP7

TP7 tripod  
R50SS rescue unit  
#204 carry bag

### Q S50GM7

TP7 tripod  
R50G rescue unit  
MW50G work winch

### S50SSM7

TP7 tripod  
R50SS rescue unit  
MW50SS work winch

*See next page for a complete  
list of system components*



## R50 Series

### 3-Way Rescue SRL

The R50 series unit is a Self Retracting lifeline, capable of raising and lowering for rescue and retrieval. Upon a fall, the system can be activated into winch mode, for raising and lowering the worker to safety.

- ♥ Rugged, lightweight aluminum housing
- ♥ Dual internal inertia breaking system
- ♥ Includes pulley & carabiner
- ♥ Load indicating snaphook
- ♥ Three lifeline constituents available, see below

#### Q R50G

50' galvanized wire rope

#### R50SS

50' stainless steel wire rope

#### R50T

50' Technora® synthetic rope



## MW Series

### Material Winch

The MW series winches offer raising and lowering capabilities with a friction brake that prevents free-wheeling when under a load.

- ♥ Rugged, steel frame drum
- ♥ Three lifeline constituents and lengths available, see below
- ♥ Includes pulley & carabiner
- ♥ Includes swivel snaphook

#### Q MW50G

50' galvanized wire rope

#### MW50SS

50' stainless steel wire rope

#### MW50T

50' Technora® synthetic rope

#### MW100G

100' galvanized wire rope

#### MW100SS

100' stainless steel wire rope

#### MW100T

100' Technora® synthetic rope



MW50G

## TP7 Series

### Aluminum Tripods

FrenchCreek confined space tripods are designed to withstand 5,000 lbs. of vertical load, yet are lightweight and portable, offering single person setup that is quick and easy.

- ♥ Adjustable/locking aluminum frame and chain
- ♥ Available in 7' or 9' lengths, see below

#### Q TP7

7' aluminum tripod  
2 attachment points on head

#### Q TP9

9' aluminum tripod  
2 attachment points on head



TP7



## 199D

### Controlled Descent Device

This device can be used in conjunction with a full body harness or work seat along with the appropriate fall arrest system. As the lever on the device is moved, friction on the rope decreases and the device will descend.

- Used on a single 7/16" (11mm) piece of Kernmantle rope
- If user lets go of lever or squeezes in a "panic" situation, the device automatically locks and descent is stopped.
- Device can be inverted to lower an individual in a rescue situation.



#### 199-50

50' rope kit  
(1) #354-4 carabiner  
Carry bag

#### 199-100

100' rope kit  
(1) #354-4 carabiner  
Carry bag

#### 199-200

200' rope kit  
(1) #354-4 carabiner  
Carry bag

## WL Series

### Flexible Access Ladder

FrenchCreek flexible access ladders are constructed of high strength webbing and 1 1/4" round fiberglass rungs that are 12" wide. Multiple ladders can be joined together using carabiners, or you can order a longer or custom length.

#### WL-10

10' flexible web ladder  
Two #354-4 carabiners

#### WL-30

30' flexible web ladder  
Two #354-4 carabiners

#### WL-50

50' flexible web ladder  
Two #354-4 carabiners

#### WL-20


20' flexible web ladder  
Two #354-4 carabiners

#### WL-40

40' flexible web ladder  
Two #354-4 carabiners

#### 354-4

Twistlock carabiner 1" gate

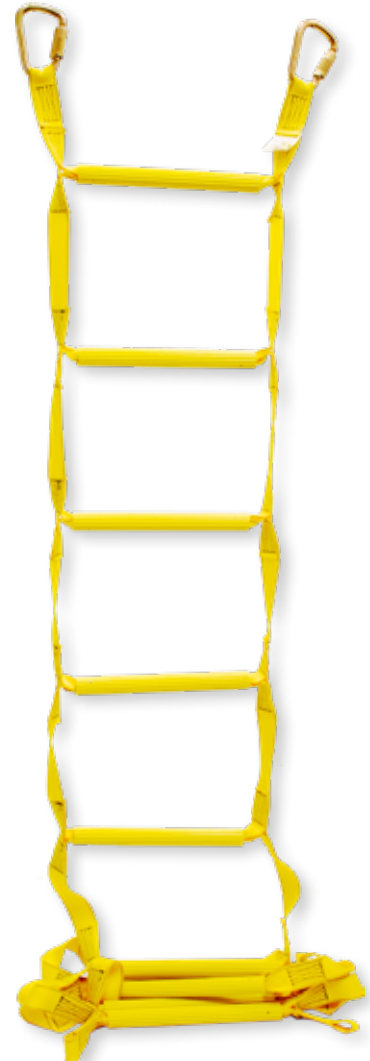

## System 99

### Self-Raising/Lowering System

FrenchCreek's system 99 is a versatile lifting and lowering system that can be used for utility/work systems or for rescue & recovery. The lightweight, compact universal system can be set up in seconds and performs a variety of functions.

- ♥ Mechanical advantage of 3:1, makes the system easily operated by one person
- ♥ A top side worker can utilize the system to rescue an incapacitated worker
- ♥ Lightweight design, 200' long system, approx. weight: 52 lbs.

#### 99B-50

50' system

#### 99B-100

100' system

#### 99B-200

200' system



## RPR Kits

### Remote Prompt Rescue Kits

Time is of the essence in any emergency situation. In an ideal situation, a trained, qualified co-worker can immediately assist another worker in the event of a fall. This system allows a capable worker to attach a raising/ lowering system to the fallen worker's D-Ring, providing a means for rescue.



RPR-25 kit

### RPR-25

RPCC-12 rescue pole assembly with bag

99B 25' System 99 raising/lowering system (page 69)

### RPR-50

RPCC-12 rescue pole assembly with bag

99B 50' System 99 raising/lowering system (page 69)



### RPCC-12

6'-12' extendable rescue pole with carabiner holding clip  
354-2Z twistlock carabiner (1" gate opening)



## Confined Space

### Accessories & Items

Additional items to add to your confined space kit.



**Q206**

32" X 66" X 7'  
Tripod carrying bag



**Q204**

16" X 12" X 10"  
Hard bottom winch bag  
Handle & Velcro closure



**Q354-4**

Twistlock carabiner  
1" gate opening



**Q354-5**

Twistlock carabiner  
3/4" gate opening



**Q45**

Replacement Split Pulley

## Rescue Assistance

### Accessories

During a confined space rescue there may be no easy way of getting the victim or rescuer out of the confined space. These items can be deployed to aid in rescue.



**207**

Wristlets (pair)



**207Y**

Wristlets (pair)  
with yoke



**207YL**

Wristlets (pair)  
with yoke  
25' tagline



**702Y**

Web yoke assembly  
with spreader bar





## LADDER SAFETY SYSTEMS

Shown:  
VL Cable System

## Compatible Harnesses

### For Vertical Climbing Systems

When using a vertical climbing system, FrenchCreek recommends these harnesses when ascending or descending the Rigid Rail or VL cable systems. These harnesses come standard with a waist D-Ring for connection to the system keeping workers within OSHA compliance.

**OSHA 1910.140(d)(1)(iv):** Fall arrest systems must sustain the employee without making contact with the employee's neck and chin area.



#### 850B-TS

6 point adjustment  
Hip Positioning D-Rings  
Waist D-Ring  
Tongue buckle/grommet leg adjustments  
In stock sizes **M, L, XL**



#### 22850B-TS

6 point adjustment with comfort waist pad  
Hip Positioning D-Rings  
Waist D-Ring  
Tongue buckle/grommet leg adjustments  
In stock sizes **S-M, L-XL**



#### 22030B-BLK

Navigator Full body harness  
Wide waist belt & lumbar pad  
Comfort air mesh padding  
Several attachment points



## VL-38

### Flexible Cable Climbing System

FrenchCreek's VL-38 cable climbing system offers an innovative solution for vertical climbing that is easy to use and requires minimal maintenance. The system's stainless steel construction stands up to the elements for extended periods of time, allowing permanent installation. Standard systems feature:

- ♥ Top & bottom bracket with tensioner
- ♥ Rung clamps for up to 1-1/8" diameter rungs
- ♥ 3/8" galvanized wire-rope Lifeline permanently terminated at one end
- ♥ The appropriate amount of cable guides based on system length

### Ordering Options

*Final product #'s designated by length. Available in 10' increments from 20'-300'.*

#### VL-38-20

VL-38 system, 20' in length

#### VL-38-50

VL-38 system, 50' in length

#### VL-38-100

VL-38 system, 100' in length

#### VL-38-300

VL-38 system, 300' in length

### System Accessories

#### 1401A-38

Galvanized steel cable rope grab  
Includes shock absorber & carabiner  
Fits 3/8" and 5/6" wire rope

#### VL-CG

Cable guide for VL-38 system  
Fits up to 1-1/8" diameter ladder rung



## Typical VL-38 System

**20'-300' systems include:**

- (1) *Top bracket (with hat clamps)*
- (1) *Bottom bracket (with tensioner)*
- (1) **C38** wire rope assembly

**VL-CG** appropriate amount of cable guides




### **Q1401A-38 (Sold separately)**

Stainless steel cable grab  
Includes shock absorber & carabiner  
Fits 3/8" and 5/16" wire rope



### **VL-CG**

Cable guide for VL-38 system  
Fits up to 1-1/8" diameter ladder rung

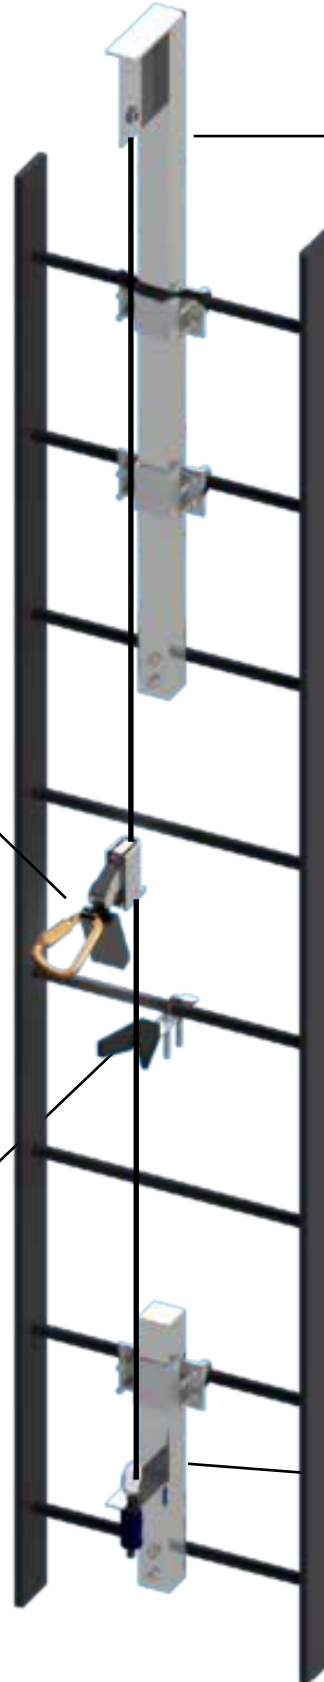

**Top bracket**



**Bottom Bracket  
& Tensioner**



## Rigid Rail

### Vertical Climbing System

The rigid rail climbing systems provide maximum climbing safety for workers in virtually any place that climbing must be done. The rail attaches quickly and easily to any ladder step iron or climbing surface. The trolley travels freely and easily along the rail and immediately arrests upon a fall.

▼ **When ordering a rigid rail system, you will need to provide rung sizes, shapes, detail or other specifics.**

## Rail Options

*Product length specified by ladder height, please specify upon ordering.*

### 1-1100-AR

Anodized aluminum rail  
with mounting hardware

### 1-1105-SS

316 stainless steel rail  
with mounting hardware

## Trolley Options

### Q 2-1200A-AT

Climbing trolley for straight vertical  
aluminum rail

### Q 2-1224A-AT

Climbing trolley for straight vertical  
stainless steel & aluminum rails

### 2-1221A-AT

Climbing trolley for curved/straight  
aluminum rail

### 2-1223-AT

Trolley for horizontal aluminum  
rails



## Typical Rigid Rail System

**Standard Aluminum System includes:**  
(with rung clamps)

- 1-1100-AR** vertical rail (with ladder rung clamps)
- (1) 2-1200A-AT** climbing trolley for aluminum rail

Choose the style of your rung clamp



- Q 2-1200A-AT**  
Climbing trolley for straight vertical aluminum rail  
Includes Carabiner



## Removable Extension

The removable extension is used to access a permanent rail system/ladder from the top, when a permanent extension is not possible or desirable. The extension is positioned into the existing permanent rail with a machined high-strength alignment bar and support channel.

- Q 5-1501**  
54" removable aluminum extension rail
- Q 5-1502B**  
42" removable stainless steel extension rail



## AP36

### Ladder Anchor Post

FrenchCreek's AP36 ladder anchor post is a solution to maintaining fall protection on a fixed ladder. This anchor post can be used at the top of a fixed ladder to provide a secure tie-off point when transitioning from the ladder to the elevated level.

- ♥ Compatible with FrenchCreek vertical climbing systems
- ♥ Can be positioned to the left or right, and in front or behind ladder rungs
- ♥ Minimal parts & easy setup
- ♥ Meets and exceeds OSHA 1910.29

## AP36

Ladder anchor post  
U-bolts & mounting hardware



## 4-1000


### Ladder Guard System

FrenchCreek ladder guard system is a method of covering an 8' section of a fixed ladder in order to control access. The system comes with the ladder guard as well as all required materials to attach the guard to a fixed ladder.

- ♥ **Standard system includes all hardware necessary to mount ladders 12"-24" wide.**

## Q 4-1000

Complete 8' ladder guard system

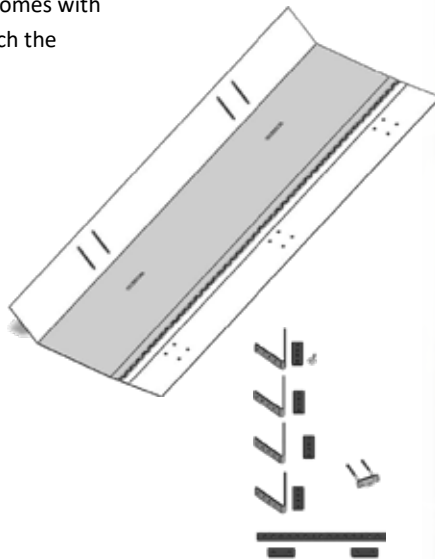



## APEX

### Retractable Ladder Anchor Post

The APEX Retractable Anchor Post provide a secure fall arrest anchor point for workers using fixed ladders, meeting and exceeding OSHA and ANSI requirements. Featuring retractable, counterbalanced aluminum posts and a stainless steel anchor point, APEX allows users to remain safely tethered while mounting and dismounting. Designed for rugged environments like water treatments plants, mines, and rooftops, it ensures safer, more stable ladder transitions.

- Meets and exceeds OSHA & ANSI requirements
- Retractable, counterbalanced lightweight safety yellow aluminum posts
- Load tested over 5,000 lbs.
- Easy cam & pin locking functions
- Installation hardware included to mount to the majority of ladder designs and fabrications




*Stainless Steel Anchor Point*




*Hexagonal-Shaped Post For A Secure Grip*



*Easy Cam & Pin Locking Functions*

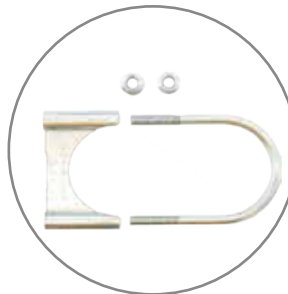

*Example Of Mounting Hardware*

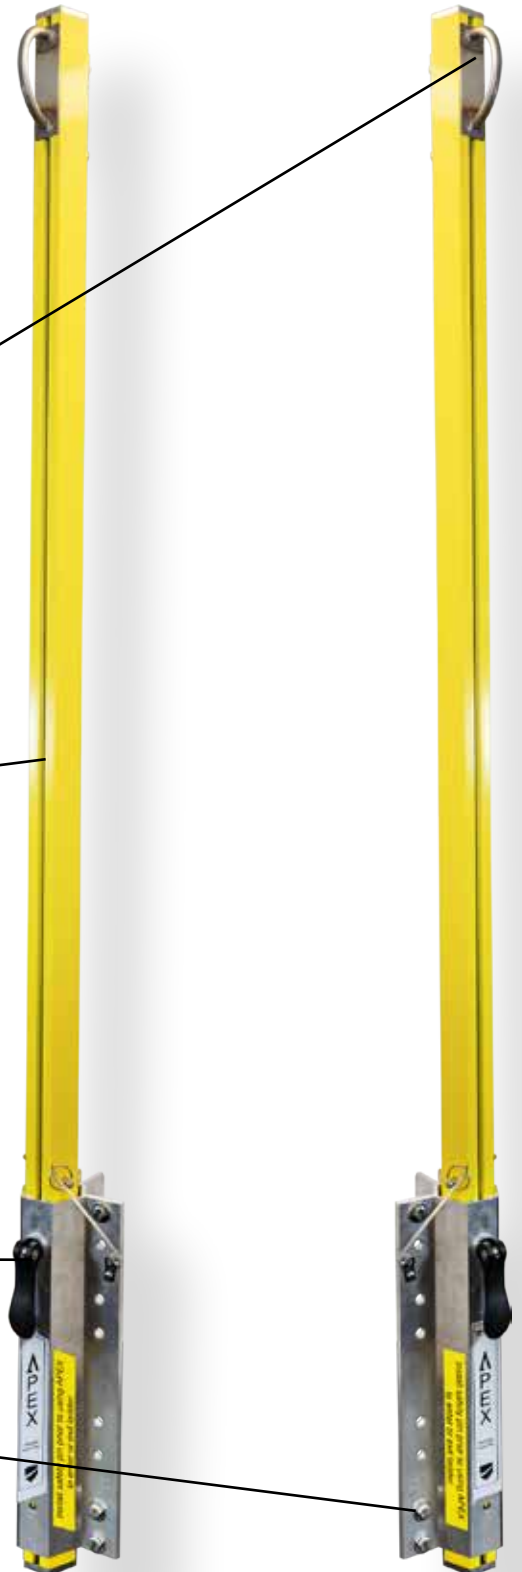



## SAFETY LANYARDS





# CALCULATE FALL CLEARANCE LIKE A PRO

It is vitally important that fall clearance is properly calculated before working at height. Because, guessing is for rookies.

## CALCULATION

When tying off overhead with a shock absorbing lanyard, the required fall clearance distance (FC) is = A + B + C + D.

**A**

Lanyard length  
(Example = 6 feet)

**B**

Maximum deceleration distance of the lanyard  
(3.5 feet is the OSHA requirement)

**C**


Height of the suspend worker  
(Typically = 6', factoring in D-ring slide and harness stretch)

**D**

Safety factor (3 feet is the industry standard)

**FC**

To be safe the distance between your anchor point and the nearest obstruction must be > FC

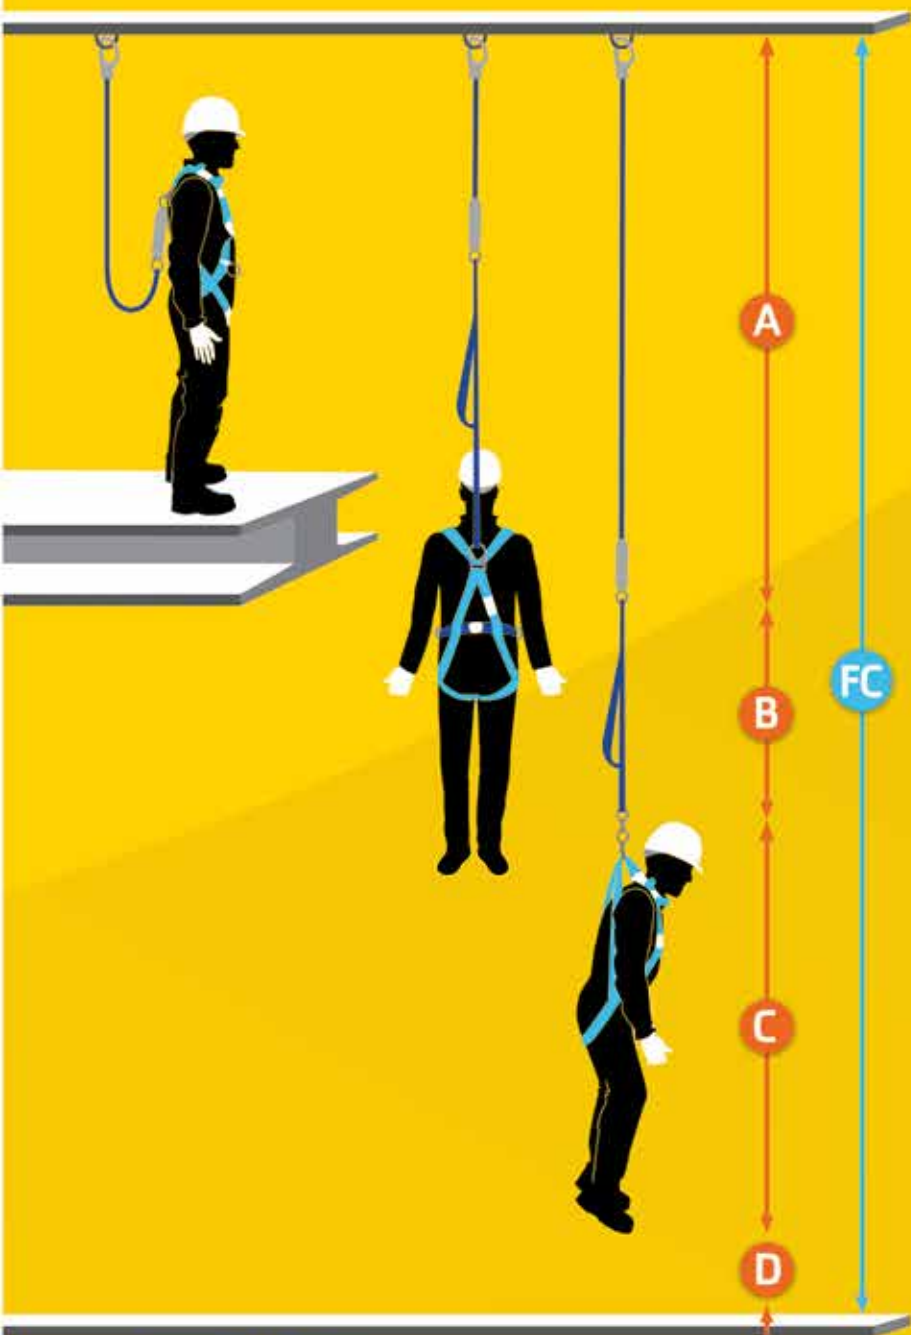

*Nearest obstruction.*

This page illustrates a common method of calculating fall clearance using a shock absorbing lanyard. Refer to the manufacturer's instructions for complete details for calculating fall clearance to ensure maximum safety on the job-site.

Web Pack-Style  
Shock Absorbing Lanyard

This web lanyard with pack style shock absorber limits fall arrest forces to 900 lbs. when tested to OSHA & ANSI standards.

- ♥ 1" synthetic lanyard with shock pack
- ♥ Standard length 6', additional lengths available
- ♥ Additional snaphook options available



**Q 450A**  
#Z74 locking snaphooks at each end  
Pack style shock absorber



**Q 440AZ**  
Dual-leg 100% tie-off  
#Z74 locking snaphooks at each end  
Pack style shock absorber

| Lanyard Leg Snaphook Options |                                                                                         |                                                                                         |                                                                                        |                                                                                           |                                                                                            |
|------------------------------|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|
| Snaphook Options             |  Z74 |  62A |  69 |  135A |  Z136 |
| Gate                         | 3,600 lb., 3/4"                                                                         | 3,600 lb., 2"                                                                           | 3,600 lb., 1 3/4"                                                                      | 3,600 lb., 2 1/2"                                                                         | 3,600 lb., 2 1/2"                                                                          |
| Material                     | Steel                                                                                   | Aluminum                                                                                | Steel                                                                                  | Aluminum                                                                                  | Steel                                                                                      |
| Single-Leg Model #           | Q 450A                                                                                  | 450A-62A                                                                                | 452A                                                                                   | 457A-135A                                                                                 | 454A                                                                                       |
| Dual-Leg Model #             | Q 440AZ                                                                                 | 440A-62A                                                                                | 442A                                                                                   | 447A-135A                                                                                 | Q 444A                                                                                     |



## Adjustable Web Pack-Style Shock Absorbing Lanyard

This adjustable web lanyard with pack-style shock absorber limits fall arrest forces to 900 lbs. when tested to OSHA & ANSI standards.

- ♥ 1" synthetic webbing with shock pack
- ♥ Adjustable lanyards ordered by longest length
- ♥ Adjust down to approximately half the length
- ♥ Standard length 6', additional lengths available
- ♥ Additional snaphook options available



### Q 450AB

#Z74 locking snaphooks on each end  
Pack style shock absorber  
Adjustable length



### 440AB

Dual-leg 100% tie-off  
#Z74 locking snaphooks on each end  
Pack style shock absorber  
Adjustable length

## Lanyard Leg Snaphook Options

| Snaphook Options   | Z74             | 62A           | 69                | 135A              | Z136              |
|--------------------|-----------------|---------------|-------------------|-------------------|-------------------|
| Gate               | 3,600 lb., 3/4" | 3,600 lb., 2" | 3,600 lb., 1 3/4" | 3,600 lb., 2 1/2" | 3,600 lb., 2 1/2" |
| Material           | Steel           | Aluminum      | Steel             | Aluminum          | Steel             |
| Single-Leg Model # | 450AB           | 450AB-62A     | 452AB             | 457AB-135A        | 454AB             |
| Dual-Leg Model #   | 440AB           | 440AB-62A     | 442AB             | 447AB-135A        | 444AB             |

Elastic Pack-Style  
Shock Absorbing Lanyard

This tubular-elastic web lanyard with shock absorbing pack limits fall arrest forces to 900 lbs. when tested to OSHA and ANSI standards.

- ♥ 1 3/16" synthetic webbing with shock pack
- ♥ Stretches to minimize tripping and snagging hazards
- ♥ Standard length 6', additional lengths available
- ♥ Standard 6' length relaxes to 4.5' when not stretched
- ♥ Additional snaphook options available



**Q 450AS**  
#Z74 locking snaphooks at each end  
Pack style shock absorber with elastic stretch



**Q 440AS**  
Dual-leg 100% tie-off  
#Z74 locking snaphooks at each end  
Pack style shock absorber with elastic stretch

| Lanyard Leg Snaphook Options |                                                                                         |                                                                                         |                                                                                        |                                                                                           |                                                                                            |
|------------------------------|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|
| Snaphook Options             |  Z74 |  62A |  69 |  135A |  Z136 |
| Gate                         | 3,600 lb., 3/4"                                                                         | 3,600 lb., 2"                                                                           | 3,600 lb., 1 3/4"                                                                      | 3,600 lb., 2 1/2"                                                                         | 3,600 lb., 2 1/2"                                                                          |
| Material                     | Steel                                                                                   | Aluminum                                                                                | Steel                                                                                  | Aluminum                                                                                  | Steel                                                                                      |
| Single-Leg Model #           | Q 450AS                                                                                 | 450AS-62A                                                                               | 452AS                                                                                  | 457AS-135A                                                                                | Q 454A                                                                                     |
| Dual-Leg Model #             | Q 440AS                                                                                 | 440AS-62A                                                                               | 442AS                                                                                  | 447AS-135A                                                                                | Q 444ASZ                                                                                   |

## Rope Pack-Style Shock Absorbing Lanyard

This polyblend rope lanyard with pack-style shock absorber limits fall arrest forces to 900 lbs. when tested to OSHA & ANSI standards.

- ♥ 1/2" diameter, three-strand polyblend rope
- ♥ Length of 30" and longer are available
- ♥ Additional snaphook options available



### 400A

#Z74 locking snaphooks on each end  
Pack style shock absorber



### 430A

Dual-leg 100% tie-off  
#Z74 locking snaphooks on each end  
Pack style shock absorber

## Lanyard Leg Snaphook Options

| Snaphook Options          |  Z74 |  62A |  69 |  135A |  Z136 |
|---------------------------|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|
| <b>Gate</b>               | 3,600 lb., 3/4"                                                                         | 3,600 lb., 2"                                                                           | 3,600 lb., 1 3/4"                                                                      | 3,600 lb., 2 1/2"                                                                         | 3,600 lb., 2 1/2"                                                                          |
| <b>Material</b>           | Steel                                                                                   | Aluminum                                                                                | Steel                                                                                  | Aluminum                                                                                  | Steel                                                                                      |
| <b>Single-Leg Model #</b> | <b>400A</b>                                                                             | <b>400A-62A</b>                                                                         | <b>402A</b>                                                                            | <b>407A-135A</b>                                                                          | <b>404A</b>                                                                                |
| <b>Dual-Leg Model #</b>   | <b>430A</b>                                                                             | <b>430A-62A</b>                                                                         | <b>432A</b>                                                                            | <b>437A-135A</b>                                                                          | <b>434A</b>                                                                                |



Wire Rope Pack-Style  
Shock Absorbing Lanyard

This wire rope lanyard with shock absorbing pack limits fall arrest forces to 900 lbs. when tested to OSHA and ANSI standards.

- 7/32" vinyl covered wire rope
- Standard length 6', additional lengths available
- Additional snaphook options available



**470A**  
#Z74 locking snaphooks at each end  
Pack style shock absorber



**480A**  
Dual-leg 100% tie-off  
#Z74 locking snaphooks at each end  
Pack style shock absorber


| Lanyard Leg Snaphook Options |                                                                                         |                                                                                         |                                                                                        |                                                                                           |                                                                                            |
|------------------------------|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|
| Snaphook Options             |  Z74 |  62A |  69 |  135A |  Z136 |
| Gate                         | 3,600 lb., 3/4"                                                                         | 3,600 lb., 2"                                                                           | 3,600 lb., 1 3/4"                                                                      | 3,600 lb., 2 1/2"                                                                         | 3,600 lb., 2 1/2"                                                                          |
| Material                     | Steel                                                                                   | Aluminum                                                                                | Steel                                                                                  | Aluminum                                                                                  | Steel                                                                                      |
| Single-Leg Model #           | 470A                                                                                    | 470A-62A                                                                                | 472A                                                                                   | 477A-135A                                                                                 | 474A                                                                                       |
| Dual-Leg Model #             | 480A                                                                                    | 480A-62A                                                                                | 482A                                                                                   | 487A-135A                                                                                 | 484A                                                                                       |

## Tubular

### Shock Absorbing Lanyard

This synthetic web lanyard with shock-absorbing core limits fall arrest forces to 900 lbs. when tested to OSHA & ANSI standards.

- ♥ 1-3/16" tubular synthetic webbing
- ♥ Standard length 6', additional length available
- ♥ Additional snaphook options available

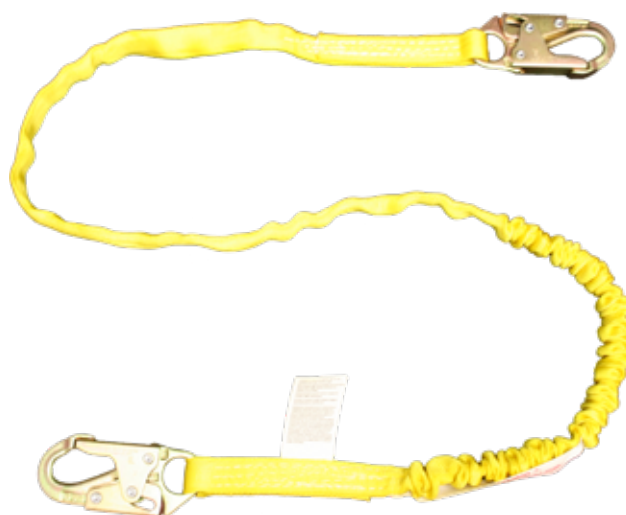

#### Q460A

#Z74 locking snaphooks on each end  
Internal shock absorbing core



#### 420A

Dual-leg 100% tie-off  
#Z74 locking snaphooks on each end  
Internal shock absorbing core


### Lanyard Leg Snaphook Options

| Snaphook Options   |  Z74 |  62A |  69 |  135A |  Z136 |
|--------------------|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|
| Gate               | 3,600 lb., 3/4"                                                                         | 3,600 lb., 2"                                                                           | 3,600 lb., 1 3/4"                                                                      | 3,600 lb., 2 1/2"                                                                         | 3,600 lb., 2 1/2"                                                                          |
| Material           | Steel                                                                                   | Aluminum                                                                                | Steel                                                                                  | Aluminum                                                                                  | Steel                                                                                      |
| Single-Leg Model # | Q460A                                                                                   | 460A-62A                                                                                | 462A                                                                                   | 467A-135A                                                                                 | 464A                                                                                       |
| Dual-Leg Model #   | 420A                                                                                    | 420A-62A                                                                                | 422A                                                                                   | 427A-135A                                                                                 | 424A                                                                                       |

## Elastic Tubular Shock Absorbing Lanyard

This tubular-elastic web lanyard with internal shock absorbing core limits fall arrest forces to 900 lbs. when tested to OSHA and ANSI standards.

- ♥ 2" tubular synthetic webbing
- ♥ Stretches to minimize tripping and snagging hazards
- ♥ Standard length 6' length only
- ♥ Standard 6' length relaxes to 4.5' when not stretched
- ♥ Additional snaphook options available

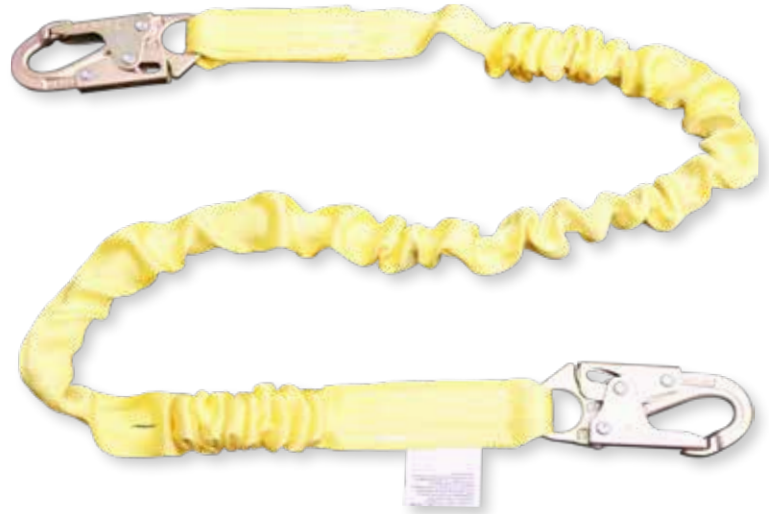

### **Q 460AS**

#Z74 locking snaphooks at each end  
Internal shock absorbing core



### **420AS**

Dual-leg 100% tie-off  
#Z74 locking snaphooks at each end  
Internal shock absorbing core

## Lanyard Leg Snaphook Options

| Snaphook Options          |  Z74 |  62A |  69 |  135A |  Z136 |
|---------------------------|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|
| <b>Gate</b>               | 3,600 lb., 3/4"                                                                         | 3,600 lb., 2"                                                                           | 3,600 lb., 1 3/4"                                                                      | 3,600 lb., 2 1/2"                                                                         | 3,600 lb., 2 1/2"                                                                          |
| <b>Material</b>           | Steel                                                                                   | Aluminum                                                                                | Steel                                                                                  | Aluminum                                                                                  | Steel                                                                                      |
| <b>Single-Leg Model #</b> | <b>Q 460AS</b>                                                                          | <b>460AS-62A</b>                                                                        | <b>462AS</b>                                                                           | <b>467AS-135A</b>                                                                         | <b>464AS</b>                                                                               |
| <b>Dual-Leg Model #</b>   | <b>420AS</b>                                                                            | <b>420AS-62A</b>                                                                        | <b>422AS</b>                                                                           | <b>427AS-135A</b>                                                                         | <b>424AS</b>                                                                               |

## Tie-Back Lanyards

### Shock Absorbing Lanyard

The tie-back web lanyards with shock absorbing pack can be used as a tie-back anchor and limits fall arrest forces to 900 lbs. when tested to OSHA and ANSI standards.

- ♥ 1 3/8" tubular synthetic webbing
- ♥ Standard length 6', additional lengths available
- ♥ Color coded wear indicator
- ♥ Additional snaphook options available



#### 456AW

#Z74 locking snaphook one end  
#63 (3/4" opening) auto locking snaphooks other ends  
Pack style shock absorber



#### 456AW-EXT

#Z74 locking snaphook one end  
#63 (3/4" opening) auto locking snaphook other end  
Pack style shock absorber  
D-Ring for additional connections



#### 446AW

Dual leg (100% tie off)  
#Z74 locking snaphook one end  
#63 (3/4" opening) auto locking snaphook other end  
Pack style shock absorber



## Web Pack-Style Single Leg Shock Absorbing Lanyard

This web lanyard with pack style shock absorber limits fall arrest forces to 900 lbs. when tested to OSHA & ANSI standards.

- ♥ Heavy duty 1 3/4" synthetic webbing
- ♥ Standard length 6', additional lengths available
- ♥ Additional snaphook options available



### 490A

Heavy duty 1 3/4" synthetic webbing  
#274 locking snaphooks each end  
Pack style shock absorbing




### 494A

Heavy duty 1 3/4" synthetic webbing  
#274 locking snaphook at one end  
#Z136 rebar snaphook (2 1/2" opening other end)  
Pack style shock absorbing

### 490A-DL

Dual-leg 100% tie-off  
Heavy duty 1 3/4" synthetic webbing  
#274 locking snaphooks at each end  
Internal shock absorbing core

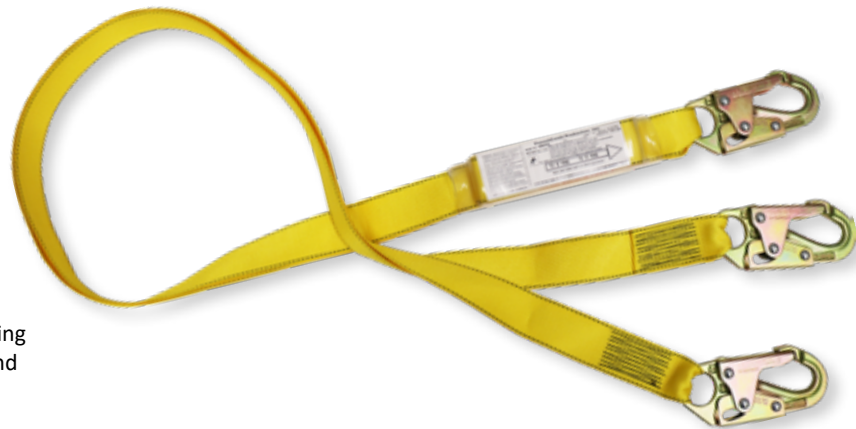

## Restraint Lanyards:

### Rope, Wire Rope, & Web (Positioning Only)

Positioning lanyards should be used in conjunction with a back-up fall arrest device.

- Standard length 6', additional lengths available
- Additional snaphook options available



#### 2020

7/16" diameter rope  
Adjustable rope ascender  
Available with steel, or aluminum hardware



#### 2010A

1/2" diameter rope  
Adjustable rope ascender  
Available with steel, or aluminum hardware



#### 400

6' polyblend rope lanyard  
#Z74 locking snaphooks each end



#### 404

6' polyblend rope lanyard  
#Z74 locking snaphook at one end  
#Z136 rebar snaphook (2 1/2" opening other end)



#### Q450B

6' synthetic web lanyard  
#Z74 locking snaphooks at each end  
Adjustable length

## Positioning & Restraint

### Rebar Assemblies


These positioning and chain assemblies can be used to limit free fall distance to 2' or less. FrenchCreek can customize any assembly to your specific job application. Please inquire.

- ♥ Quickly connect to rebar and structures
- ♥ Chain or webbing
- ♥ Non-swivel or swivel



#### @ 324-C

Chain positioning assembly, 12 links  
#Z136 (2 1/2" opening snaphook)  
Two #Z74 (3/4" opening) locking snaphooks

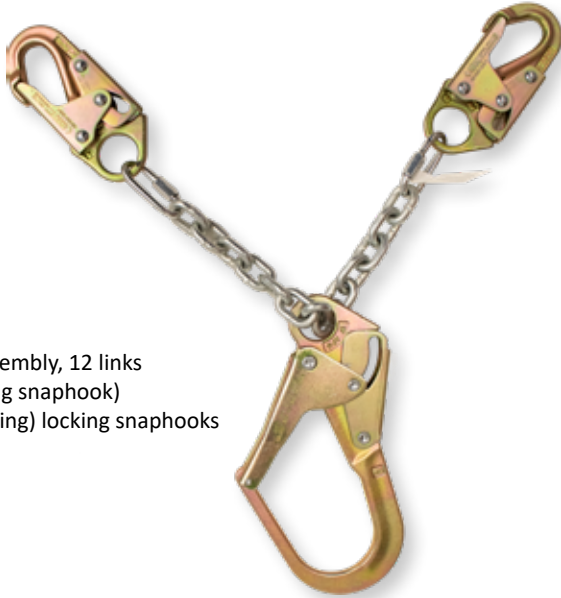

#### @ 324-CSZ

Chain positioning assembly, 12 links  
#Z136 (2 1/2" opening snaphook)  
Swivel  
Two #Z74 (3/4" opening) locking snaphooks



#### 324-WS

Web positioning assembly  
#Z136 (2 1/2" opening snaphook)  
Swivel  
Two #Z74 (3/4" opening) locking snaphooks





## Lanyard Customization Options: Customize & Optimize Your Lanyard

FrenchCreek offers many options when ordering lanyards; from custom lengths to a wide variety of snaphooks. We also offer the following options/accessories to keep you safe, give you peace of mind, and facilitate all of your on-the-job duties!



### Choke-Loop 1

Pack-style shock absorber  
Looped End



### Choke-Loop 2

Internal shock absorber  
Looped end



### 353

Pack-style shock absorber  
D-Ring one end  
#Z74 locking snaphook other end

### EXT

Additional D-Ring added to lanyard  
Provides secondary in-line attachment point



### 346AS-EXT

Pack-style shock absorber  
Choke loop  
D-Ring extension one end  
#63 (3/4" opening) snaphooks each end



# When a fall occurs, minutes matter!

It is common knowledge in the fall protection industry that every minute in suspension after a fall is extremely crucial! Suspension trauma is a real condition that can occur when a worker is suspended even for a short amount of time. The U-Res-Q system can relieve 100% of harness tension.


Should even the slightest fall occur, the light-weight pouch releases into rescue mode by automatically ejecting a high strength, 16' synthetic rescue ladder. At that point the worker can climb back onto the work platform, or simply stand on the ladder to relieve pressure, increase blood flow, and ensure enough time for emergency response.

#### Products shown:

R490A -16' Self-rescue lanyard

22850B-TS STRATOS full body harness

**U-RES-Q**

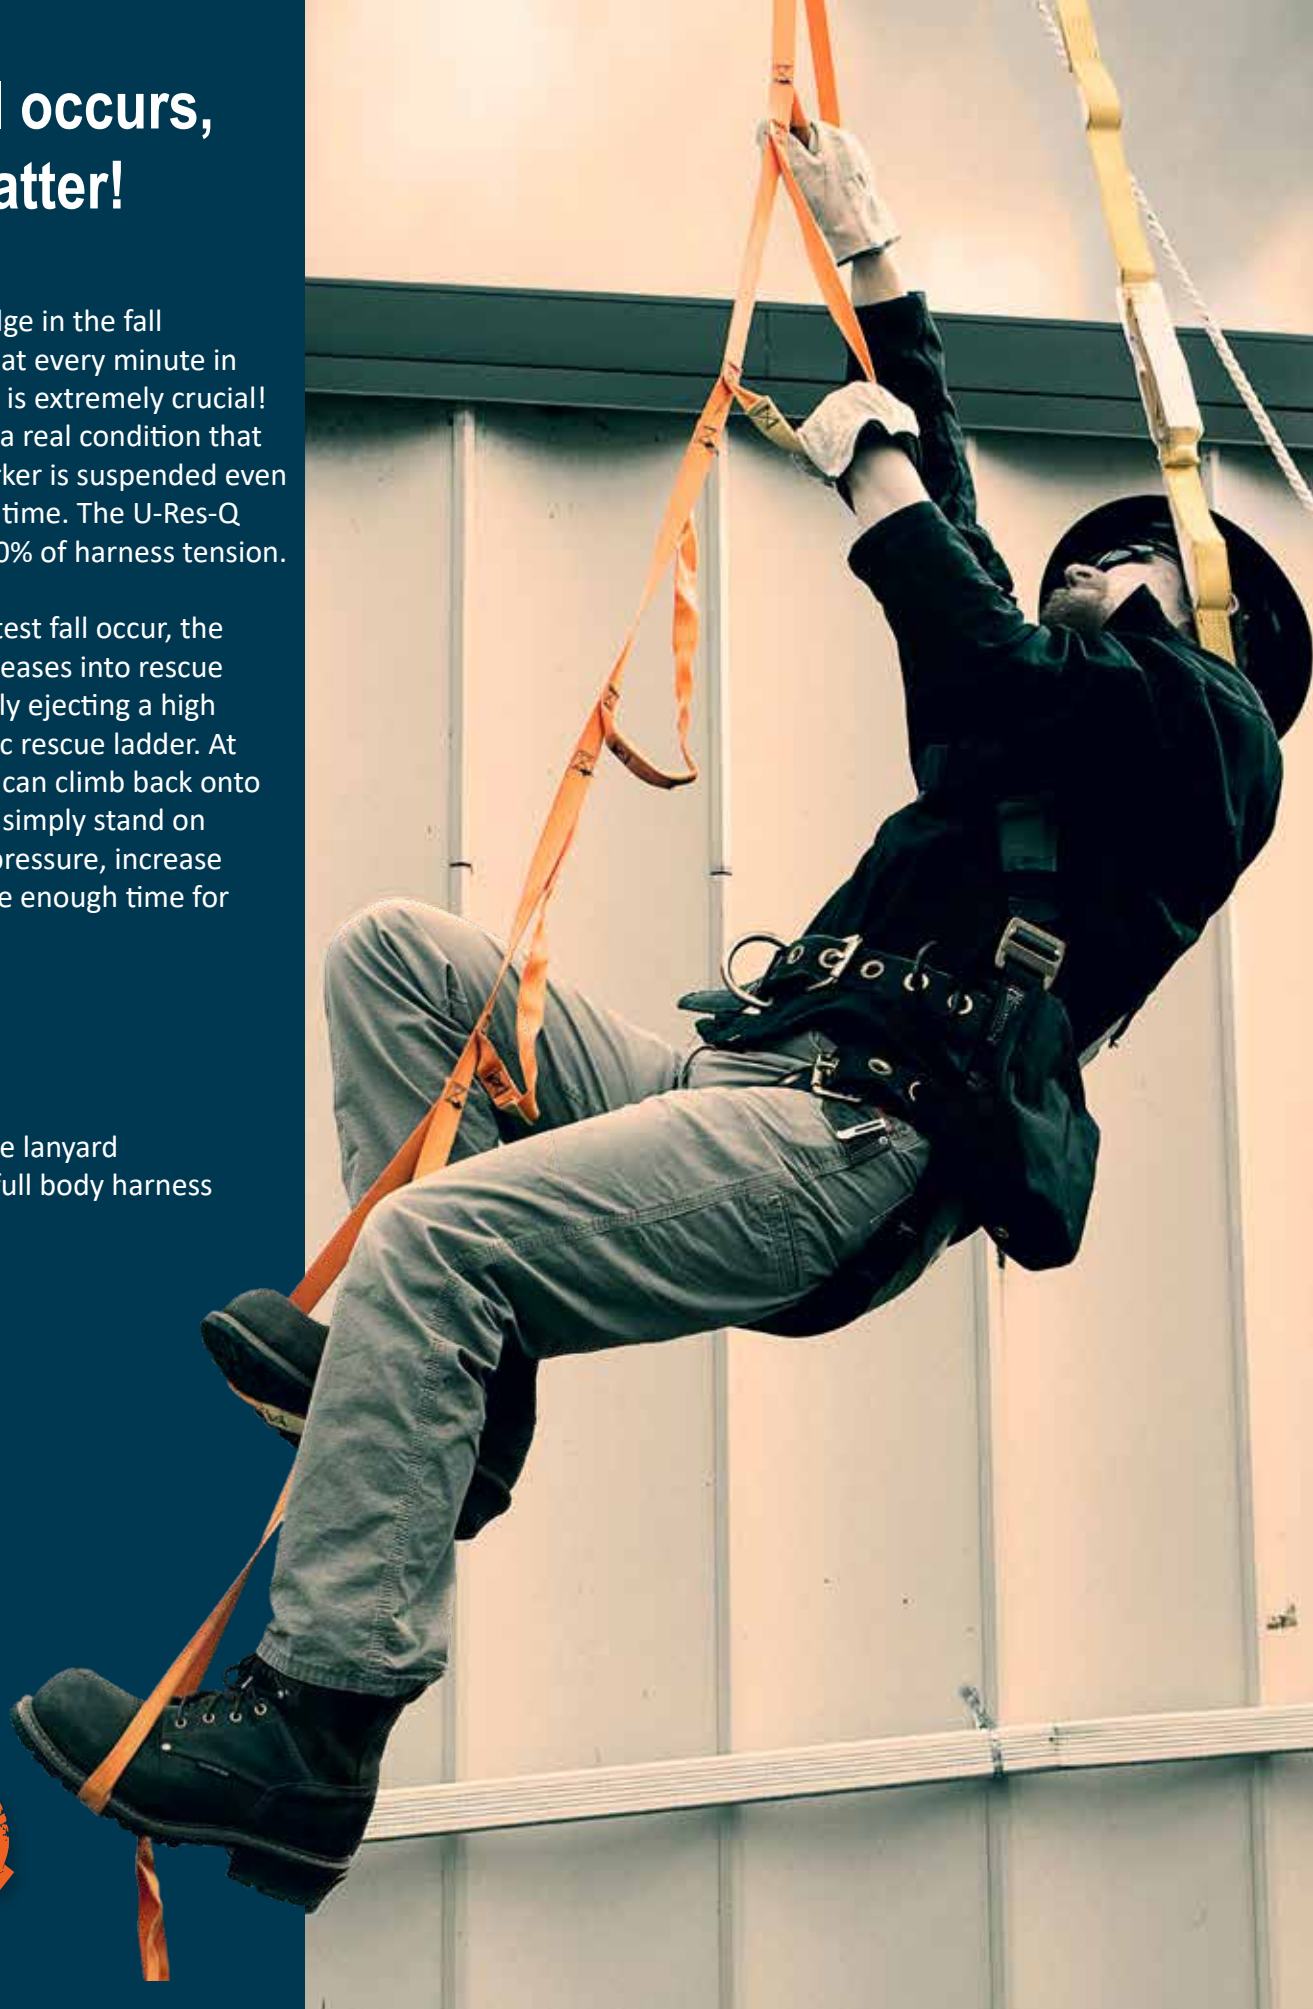

## U-RES-Q

### Self Rescue System

The U-RES-Q is available on many FrenchCreek shock absorbing lanyards. A standard shock absorbing lanyard may save you in the event of a fall, but remaining suspended is another problem entirely. The U-RES-Q should be used in conjunction with a full body harness.

- ♥ 16' standard length, other lengths available
- ♥ Helps to reduce the harmful affects of suspension trauma
- ♥ *Available option to most lanyards*



## R-RETRO

*Retro fit U-Res-Q to any lanyard*

U-Res-Q pouch  
#Z74 (3/4" opening) locking snaphook  
D-Ring other end  
Use in-line with lanyard & anchor point



## R-RESC

*U-Res-Q pouch with Velcro bottom*

20' rescue ladder  
#63 (3/4" opening) captive eye carabiner  
***Manually deployed model, does not auto-eject***



## R490A

6' x 1 3/4" shock absorbing lanyard with pack  
#Z74 (3/4" opening) locking snaphooks at each end  
U-Res-Q pouch ejects 16' rescue ladder

## Steel Series

### Anchorage Connectors

FrenchCreek features a complete line of steel anchorage connectors ranging from removable and reusable to permanently affixed. These anchors are connected to solid steel structures and/or steel I-beams.



#### 1300-WP

##### Web tie-off adapter

1 3/4" web, 3" wide polyester wear pad  
3" D-ring one end, 2" D-ring opposite end

#### 1324-10WP

10' tie-off adapter

#### 1324-WP

2' tie-off adapter

#### Q 1336-WP

3' tie-off adapter

#### Q 1348-WP

4' tie-off adapter

#### Q 1372-WP

6' tie-off adapter

#### 1396-WP

8' tie-off adapter

*Available in additional lengths*



#### 1300

##### Web tie-off adapter

1 3/4" web  
3" D-ring one end, 2" D-ring opposite end

#### Q 1324

2' tie-off adapter

#### Q 1336

3' tie-off adapter

#### Q 1348

4' tie-off adapter

#### Q 1372

6' tie-off adapter

*Available in additional lengths*



#### 1100

##### Web tie-off adapter

1 3/4" web, D-ring one end

#### Q 1124

2' tie-off adapter

#### Q 1136

3' tie-off adapter

#### 1148

4' tie-off adapter

#### 1172

6' tie-off adapter

*Available in additional lengths*



#### 1122HD

##### Web scaffold/pipe choker

1" 9800 lb. web, choker style, 22" long  
Attaches to anchors up to 3" diameter

*Available in additional lengths*



## 1100 HOT WORK

### **Kevlar Web tie-off adapter**

Web chocker style

1 3/4" Kevlar web with D-ring

**1124K**

2' tie-off adapter

**1136K**

3' tie-off adapter

**1148K**

4' tie-off adapter

**1172K**

6' tie-off adapter

*Available in additional lengths*



## 1600VC

### **Cable tie-off adapter (pass-thru style)**

5/16" vinyl coated cable

4" O-ring one end, 3" O-ring opposite end

**1636VC-516**

3' tie-off adapter

**1648VC-516**

4' tie-off adapter

**1672VC-516**

6' tie-off adapter

**1696VC-516**

8' tie-off adapter

*Available in additional lengths*



## **1701**

### **Bolt-On anchor plate with D-ring**

Removable and reusable

Fasteners not included

**1701-CSW**

Weld-on carbon steel anchor plate w D-ring

**1701-SSW**

Weld-on stainless steel anchor plate w D-ring



## 1550

### **D-bolt anchor (designed for anchoring into steel structure)**

Designed to prevent roll-out of snaphooks

Grade 8, 1/2" bolt, washer, and lock nut

1 3/4" maximum steel thickness





## 1760-12S

**12" Anchor Post** (Bolts to steel surfaces)

Includes four 1/2"-13X 3" length grade 5 bolts, nuts, & washers

Accommodates up to 1 1/2" steel thickness



## 1775-S3

**Steel anchor plate** (Bolts to steel surfaces)

1/4" stainless steel anchor plate with, grade 8 bolt, nut, & washer

1 3/4" webbing with D-ring

1 3/4" maximum steel thickness



## 1769

**Steel toggle anchor** (Installs into pre-drilled hole)

Fits 3/4" - 1 1/4" pre-drilled holes

1" maximum steel thickness




1769 Girder Anchor in use

## I-Beam

### Anchorage connectors

Light, smooth, and easy to use, FrenchCreek's I-beam anchors are designed to connect to a steel I-beam for fall protection. The clamps attach without tools to I-beams either overhead or underfoot.

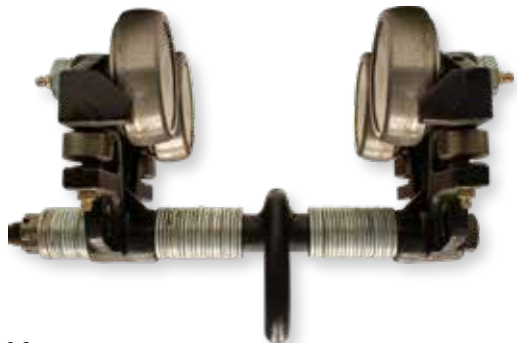

**106**

#### *Sliding beam trolley*

Adjustable flange width from 3"-8"

Maximum flange thickness 1", minimum radius bend 2'



**1700**

#### *Adjustable sliding beam anchor*

Fits flanges 3 1/2" to 12" wide, up to 1 1/4" thick

Usable on top or bottom of I-beam

Center D-Ring for smoother slide



**1702**

#### *Adjustable sliding beam anchor*

Fits flanges 3 1/2" to 14" wide, up to 1 1/4" thick

Usable on top or bottom of I-beam

Floating D-Ring



106 in use



Photo Credit: SEAA/Trivent Safety Consulting

## Concrete

### Anchorage Connectors

FrenchCreek's pour-in place concrete anchor straps are designed to provide temporary anchorage in concrete. The 1 3/4" wide abrasion resistant webbing and forged steel D-Ring are rated at 5,000 lbs.



**1124C**

**2' concrete anchor strap**

D-Ring for connection

Additional lengths available



**1760-12-1525**

**Permanent structure post anchor**

Fixed welded D-Ring



**1770**

**3/4" portable/reusable concrete hole anchor**

Rated to 5,000 lbs

Use for vertical and overhead concrete


## TC-100

### Overhead concrete anchor

This concrete anchor is placed through a hole in the concrete floor, providing workers on a lower level an overhead anchor point.

## TC-100

### Overhead concrete anchor

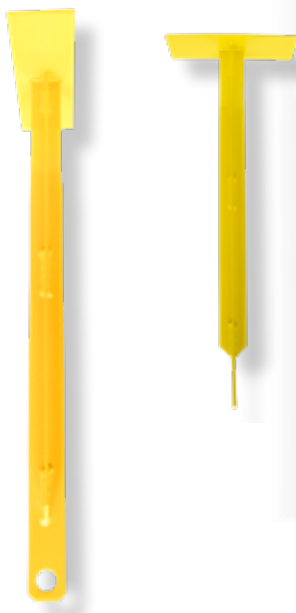

## 1789


### Parapet Wall Anchor

The FrenchCreek parapet wall anchor is designed to provide a single worker with a portable, temporary anchorage on parapet walls up to 20" thick.

- ♥ Perfect for window washing, construction, and rescue
- ♥ One padded fixed leg and one padded adjustable leg
- ♥ Multiple pin sets and adjustable mounting pad
- ♥ Sized and secured without the use of tools

## Q1789

### Adjustable parapet anchor Up to 20" width

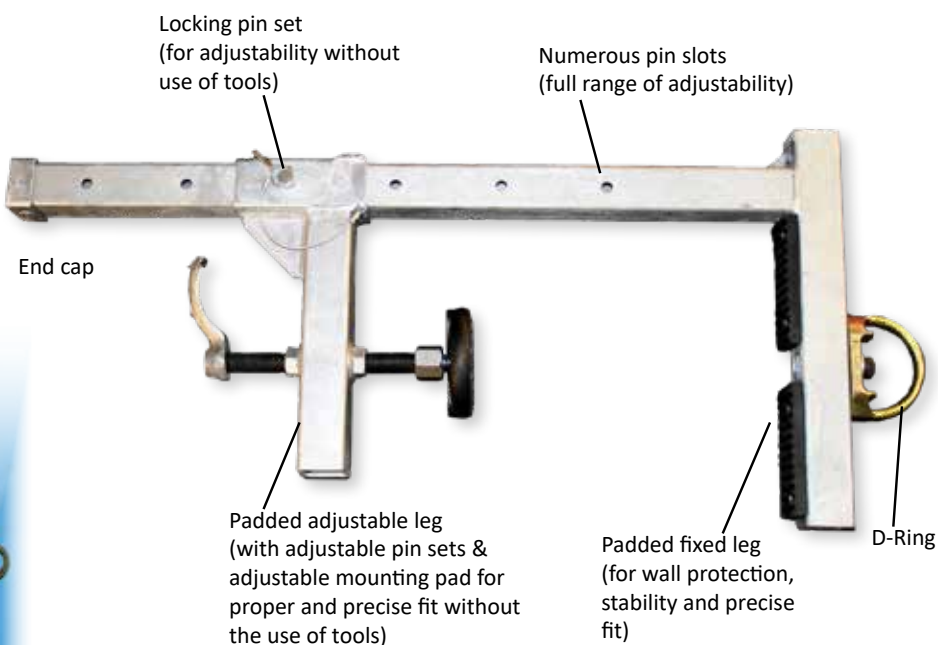



## 1785

### Door Jamb Anchor

FrenchCreek's door jamb anchor is designed to be used as a temporary anchor that mounts in a door or window opening. Applications include construction, roof tops with door entrances, elevator shafts, wall openings, emergency/rescue situations and more.

- Fits 24"-48" wide door or window openings
- One fixed leg and one adjustable leg
- Unit can be sized and secured without the use of tools

### Q1785

#### *Adjustable door jamb anchor*

24"-43" wide

Heavy duty steel tubing

Shown:

1785 adjustable door jamb anchor

XR-30LEG Self-Retracting Lifeline

22850B STRATOS Full Body harness

Padded fixed leg  
(for jamb protection, stability and precise fit)

Off-set D-Ring  
(for maximum strength)

Locking Pin Set  
(for adjustability without use of tools)

Adjustable leg  
(adjustable pin sets & adjustable mounting pad for use without tools)

Numerous Pin slots  
(full range of adjustability)

End cap

## 1790

### Rail Anchor

The rail anchor is designed to meet the needs of those workers that are working on a railway line that requires a compliant means to anchor personal fall arrest systems.

- ♥ Quickly affixes to a 55-100 lb. rail
- ♥ Allows some horizontal movement
- ♥ Working capacity 310 lbs. with tools and equipment
- ♥ Powder coated steel
- ♥ *Unit is not designed to pass rail splice plates*



## 1790

### Steel rail anchor

Carabiner & lanyard included (450A-3542)

## RT0-12

### Remote Tie-Off/First Man Up Pole

With it's lightweight and compact design the RTO-12 is a crucial tool for ensuring worker safety in applications without a proper fall arrest system in place.

- ♥ Pole extends 13' allowing average user to reach elevated tie-off points 17' high
- ♥ Operation handle controls snaphook opening
- ♥ Allows for connection to SRL and rope lifelines
- ♥ Includes carry bag

## RT0-12

### Remote Tie-Off Pole

Complete pole assembly  
Carry bag



Shown:  
RG3-13-0Z Renegade SRL  
*Sold Separately*



## Multi-Use

### Anchorage Connectors

FrenchCreek's multi-use anchorage devices can be used in a variety of applications, however some limitations may apply. FrenchCreek experts are available for inquiries and consultations and can make recommendations concerning the proper anchorage connection for your job.

#### 1503


**5" stainless steel wire hook anchor**  
5,000 lb anchor  
Connects to various anchors



1503

#### 1824

**24" anchor strap**  
#Z136 (2 1/2" gate opening) rebar snap  
Connecting D-Ring on opposite end

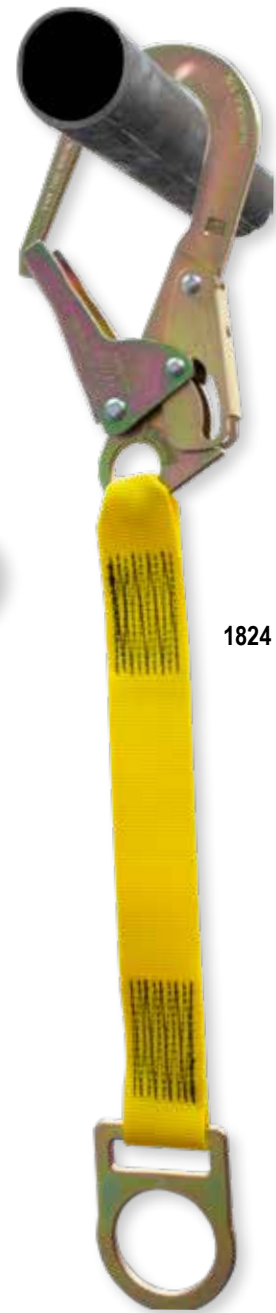

1824

#### 4157

**5' Boom strap anchor with ratchet buckle design**  
1 3/4" polyester webbing  
Plated hardware



4157



## RK Deluxe Roofer's Kit

### Complete Roofer's Kit System

FrenchCreek roofing kits come ready to install. A variety of roof anchors and multiple length of rope are available to fit many residential and industrial applications.

Kit includes:

- ♥ MRA-R double-plate roof anchor (see page 110)
- ♥ 410 5/8" lifeline (page 106) with self-locking snap on each end
- ♥ 1202AN-3 removable, trailing rope grab with 3' shock-absorbing lanyard (page 108)
- ♥ 631 full body harness (page 30)
- ♥ Carry bag, and instruction manual

### RK-25

25' deluxe roofer's kit

### RK-50

50' deluxe roofer's kit

### RK-100

100' deluxe roofer's kit



RK-25

## RKB Deluxe Roofer's Kit

### Complete Roofer's Kit System

FrenchCreek Roofing Kits come ready to install. A variety of roof anchors and multiple lengths of kits are available to fit many residential and industrial applications.

Kit includes:

- ♥ **Your choice of roof anchor see below**
- ♥ 411 5/8" lifeline (page 106) with self-locking snap on one end, thimble opposite end
- ♥ 411-50MG manual rope grab with 3' shock-absorbing lanyard (page 109)
- ♥ 631 full body harness (page 30)
- ♥ Carry bucket, and instruction manual



RKB-1715-25

| RKB Kit Anchor Selections |                                                                                     |                                                                                     |                                                                                      |                                                                                       |
|---------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Anchor Options            |  |  |  |  |
| 25' Kit                   | RKB-1720-25                                                                         | RKB-MRA-25                                                                          | RKB-1715-25                                                                          | RKB-1725-25                                                                           |
| 50' Kit                   | RKB-1720-50                                                                         | RKB-MRA-50                                                                          | Ⓢ RKB-1715-50                                                                        | RKB-1725-50                                                                           |



## Rope Lifelines

### Polyblend Synthetic Rope

FrenchCreek lifelines are constructed out of a 5/8" 3-strand polyblend synthetic rope, designed for excellent wear, strength, and limited stretch.

- 5/8" 3-strand polyblend synthetic rope
- Designed for durability, strength and limited stretch
- Available in 25' increments, **custom lengths available upon request**



**411**

5/8" rope lifeline  
#Z74 (3/4" opening) locking snaphook on one end  
Thimble opposite end

Q 411-25

25' rope lifeline

Q 411-50

50' rope lifeline

Q 411-100

100' rope lifeline



**121-2T**

5/8" rope lifeline  
(2) Thimbles on each end

**121-2T-25**

25' rope lifeline

**121-2T-50**

50' rope lifeline

**121-2T-100**

100' rope lifeline



**410**

5/8" rope lifeline  
(2) #Z74 (3/4" opening) locking snaphooks

Q 410-25

25' rope lifeline

Q 410-50

50' rope lifeline

Q 410-100

100' rope lifeline



**121-1S**

5/8" rope lifeline  
#Z74 (3/4" opening) locking snaphook on one end  
"Whipped" opposite end

**121-1S-25**

25' rope lifeline

**121-1S-50**

50' rope lifeline

**121-1S-100**

100' rope lifeline



**121-1T**

5/8" rope lifeline  
Thimble on one end  
"Whipped" opposite end

**121-1T-25**

25' rope lifeline

**121-1T-50**

50' rope lifeline

**121-1T-100**

100' rope lifeline

## Specialty Rope & Accessories

Order all of your rope from FrenchCreek! We can supply you with exactly what you need for all on-the-job applications! Don't see exactly what your looking for? Please inquire.

### 116-38

3/8" Kernmantle® rope

### 116-12

1/2" Kernmantle® rope

### 121-N

5/8" 12-strand polyester rope

### 122

3/8" 3-strand polypropylene rope

### RL-27T12

3/16" 12 strand Technora® rope

### 116-716

7/16" Kernmantle® rope

### 120

1/2" 3-strand polyblend synthetic rope

### 121

5/8" 3-strand polyblend synthetic rope

### 121-FN

5/8" 3-strand filament nylon rope



### 121RP

20" long 4 ply 600 denier polyester rope protector  
Velcro & tie strap closure  
Vertical or horizontal use



### 121CW

5 lb. flexible counterweight bag  
Keeps Lifeline tensioned, prevents excess slack  
Facilitates performance of a trailing rope grab



*Rope not included*

### 1710

**Aluminum rope termination plate**  
Fits 5/8" rope Lifelines  
No need for knots, splicing, or crimping



## Rope Grabs

### Rope & Wire Rope Grabs

FrenchCreek offers a comprehensive line of durable, user friendly rope grabs & wire rope grabs. (Lifelines can be purchased separately, and are shown on page 106) These grabs are available in two different styles:

**Manual Rope Grab:** Worker manually slides the device to the desired position on the rope and releases it, locking it on the lifeline and providing the worker with fall protection. Great for sloped roofs because they lock into place once positioned.

**Trailing Rope Grab:** Little or no positioning needed. Trailing grabs move up and down the lifeline with the worker, locking on the rope with any downward pressure.

#### Q1201N

Stainless steel trailing rope grab  
Fits 5/8" strand synthetic rope  
Attachable, detachable anywhere on lifeline  
Safety Lock

#### Q1202AN-3

1201N rope grab  
3' shock absorbing lanyard  
#Z74 (3/4" opening) locking snaphook



1201N





1201

1202A-3

## @ 1201

Stainless steel trailing rope grab  
Fits 5/8" and 3/4" 3-strand synthetic rope  
Attachable, detachable anywhere on lifeline

## 1202A-3

1201 rope grab  
3' shock absorbing lanyard  
#Z74 (3/4" opening) locking snaphook



1261

1262A-3

## @ 1261

Plated alloy steel trailing rope grab  
Fits 5/8" strand synthetic rope  
Attachable, detachable anywhere on lifeline

## 1262A-3

1261 rope grab  
3' shock absorbing lanyard  
#Z74 (3/4" opening) locking snaphook



## @ 411-50MG

50' X 5/8" polyblend rope  
5/8" manual rope grab permanently installed on rope  
3' shock absorbing lanyard  
#Z74 (3/4" opening) locking snaphook



## @ 1401-38

Stainless steel trailing rope grab  
Fits 5/16" and 3/8" wire rope  
Attachable, detachable anywhere on lifeline



## Roofing Anchors & Anchorage Systems

FrenchCreek provides a wide variety of roof anchors for maintenance work, repair and new construction.



**Q MRA-R1**  
Removable/reusable roof anchor  
Single plate with screws



**MRA-R**  
Removable/reusable roof anchor  
Double plate with screws



**Q 1715**  
Removable/reusable roof anchor  
D-Ring attachment with nails



**Q 1720**  
Disposable roof anchor  
Bracket for use with carabiner, nails



**1725**  
Disposable roof anchor  
Single D-Ring with nails



**Q 1730**  
Permanent roof anchor  
Single D-Ring with nails



**Q 1740**  
Permanent roof anchor  
Double D-Ring with nails



**1760-12-1525**  
Permanent structure post  
Fixed welded D-Ring

## Rooftract

### Roof Retractable System

FrenchCreek's Rooftract system is usable on any roof pitch. This system features FrenchCreek's RL series Self-Retracting Lifeline that rotates 360° for maximum safety and maneuverability.

- ♥ Works on any roof pitch
- ♥ Choose from **RL25, RL30, or RL50** series retractables (page 48)
- ♥ All mounting hardware included




1791 anchor

### 1791

Roof mount assembly available for steel, metal, or wood roofs  
Comes as anchor only, retractable sold separately  
360° for maximum maneuverability



1791 anchor with  
RL50GZ SRL installed

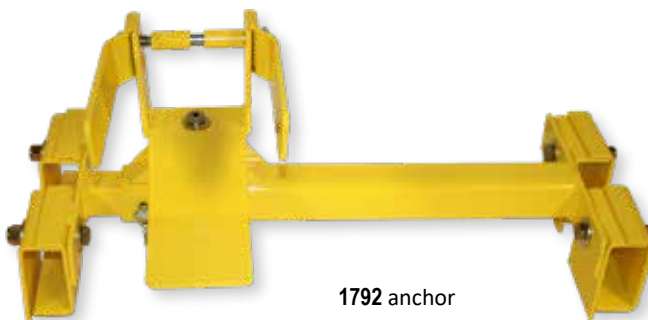

1792 anchor

### 1792

Roof mount assembly for standing seam metal roofs  
Comes as anchor only, retractable sold separately  
360° for maximum maneuverability  
Mounting hardware included



1792 anchor with  
RL50GZ SRL installed

## TEMPORARY HORIZONTAL LIFELINE TRAVERSE

*Also shown:  
STRATOS full body harness  
490A shock absorbing lanyard*

**Meets or exceeds OSHA & ANSI requirements**

### Steel I-Beam Base System

The Traverse Series temporary horizontal lifeline offers ideal protection when an overhead anchorage does not exist. Extremely lightweight and portable, this system incorporates a modular multi-base design that accommodates a wide range of steel beams.

- ♥ Lengths available to 10'-240'
- ♥ Fits 6"-12" width, up to 2 1/4" flange (options available for beams up to 36")
- ♥ Pass-thru adapters allow continuous tie-off and mobility
- ♥ Capacity: 2 users per span, no more than 6 per total system
- ♥ 42" working height (above beam)
- ♥ Weight: 60' system approximately 99.5 lbs

*See page 114 for concrete applications*

### Ordering Options

#### TRV30S12

30' system, (6"-12" I-beam base)

#### TRV120S12

120' system, (6"-12" I-beam base)

#### TRV60S12

60' system, (6"-12" I-beam base)

#### TRV240S12

240' system, (6"-12" I-beam base)

### System Components

#### TRV-S12

(6"-12" Steel I-beam stanchion)

#### TRV-S24

(18"-24" Steel I-beam stanchion)

#### TRV-S36

(24"-36" Steel I-beam stanchion)

#### TRV-PASS

Traverse system pass-thru bracket


#### CHL-CEA

Coil energy absorber with shackles

## Typical Single Span System

### 30' & 60' Systems Include:

- (2) TRV-S12 (Steel I-beam stanchion)
- (1) Cable assembly with tensioner
- (1) CHL-CEA (Coil energy absorber)

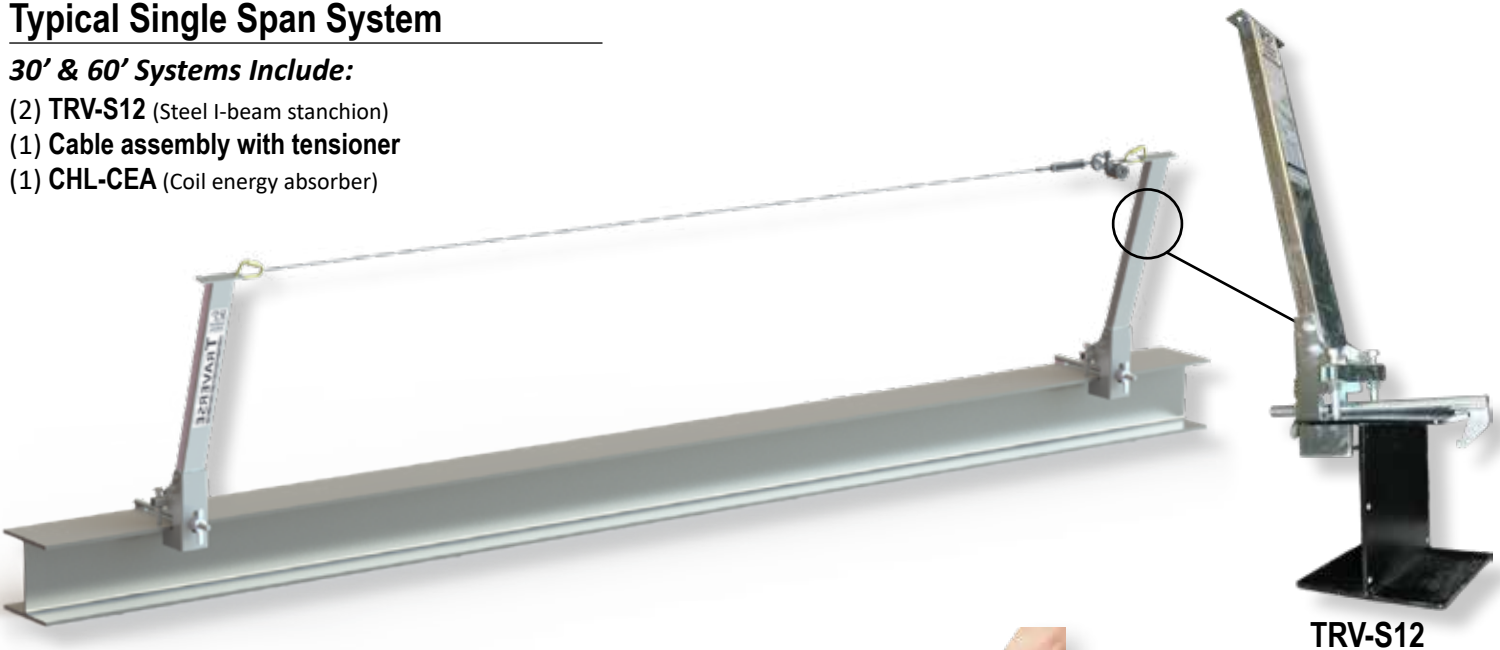


## Typical Multi-Span System

### 120' System Includes:

- (3) TRV-S12 (Steel I-beam stanchion)
- (1) Cable assembly with tensioner
- (2) CHL-CEA (Coil energy absorber)
- (1) TRV-PASS (Traverse system pass-thru bracket)

### 180' System Includes:

- (4) TRV-S12 (Steel I-beam stanchion)
- (1) Cable assembly with tensioner
- (2) CHL-CEA (Coil energy absorber)
- (2) TRV-PASS (Traverse system pass-thru bracket)

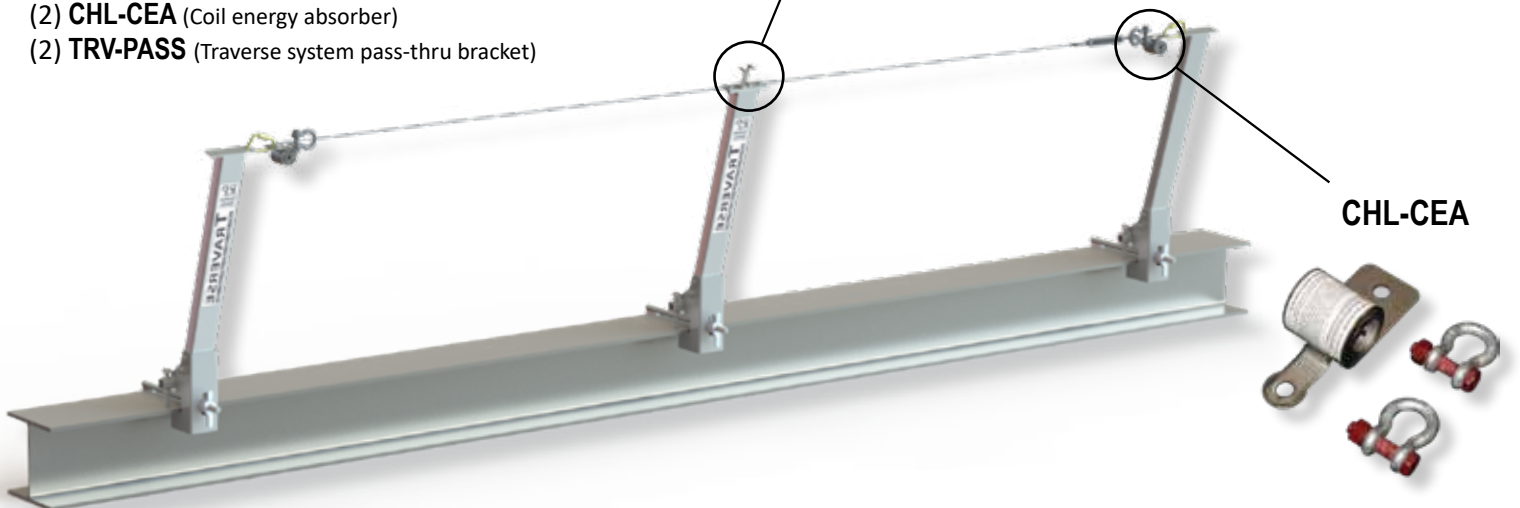



## TEMPORARY HORIZONTAL LIFELINE **TRAVERSE**



Also shown:  
*STRATOS full body harness*  
*ROGUE sub-compact SRL*

### ***Meets or exceeds OSHA & ANSI requirements***

#### **Concrete Base System**

The Traverse Series temporary horizontal lifeline offers ideal protection when an overhead anchorage does not exist. Standard system works on pre-stressed concrete beams that are a minimum of 24" wide.

- ♥ Lengths available to 10'-240'
- ♥ Fits 1/2" - 1 1/8" diameter rebar (#4-#9) and 6"-12 1/2" center to center
- ♥ Pass-thru adapters allow continuous tie-off and mobility
- ♥ Capacity: 2 users per span, no more than 6 per total system
- ♥ 40" working height (above beam)
- ♥ Weight: 60' system approximately 99.5 lbs.

*See page 112 for steel applications*

### **Ordering Options**

#### **TRV30C**

30' system, (concrete base)

#### **TRV120C**

120' system, (concrete base)

#### **TRV60C**

60' system, (concrete base)

#### **TRV240C**

240' system, (concrete base)

### **System Components**

#### **TRV-C**

Concrete end stanchion

#### **TRV-TIE**

Tie-back for concrete system

#### **CHL-CEA**

Coil energy absorber

#### **TRV-C-PASS**

Intermediate stanchion & pass-thru


#### **TRV-C-PASSTOP**

Concrete system pass-thru bracket

## Typical Single Span System

### 30' & 60' Systems Include:

- (2) TRV-C (Concrete end stanchion with tie-back)
- (1) Cable assembly with tensioner
- (1) CHL-CEA (Coil energy absorber)

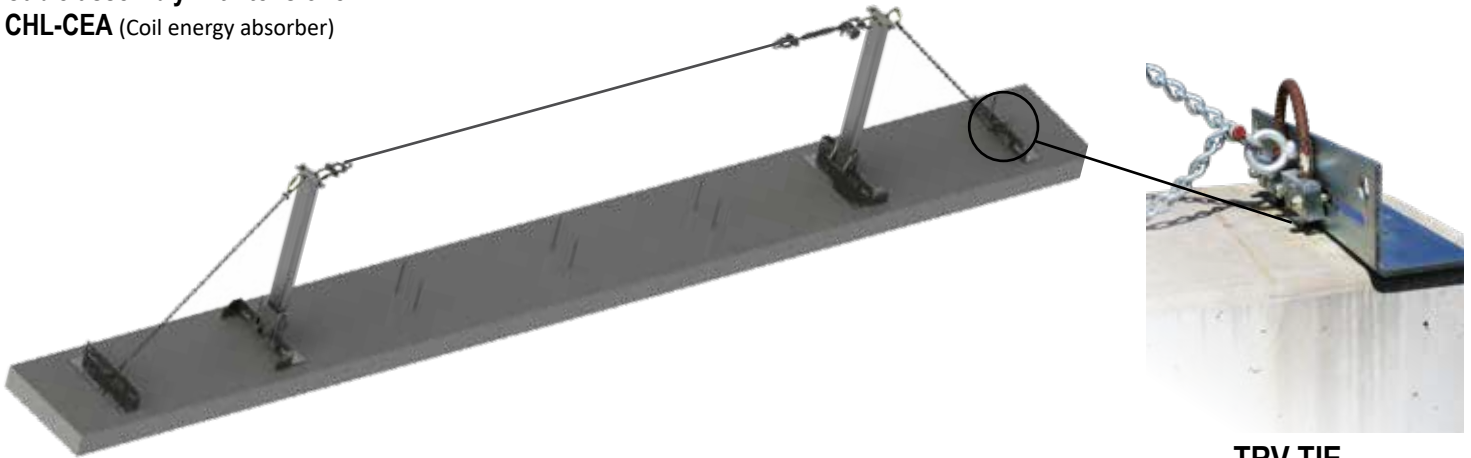

TRV-TIE

## Typical Multi-Span System

### 120' System Includes:


- (2) TRV-C (Concrete end stanchion with tie-back)
- (1) Cable assembly with tensioner
- (2) CHL-CEA (Coil energy absorber)
- (1) TRV-C-PASS (Traverse intermediate stanchion & pass thru)



TRV-C-PASSTOP

### 180' System Includes:

- (2) TRV-C (Concrete end stanchion with tie-back)
- (1) Cable assembly with tensioner
- (2) CHL-CEA (Coil energy absorber)
- (2) TRV-C-PASS (Traverse intermediate stanchion & pass thru)

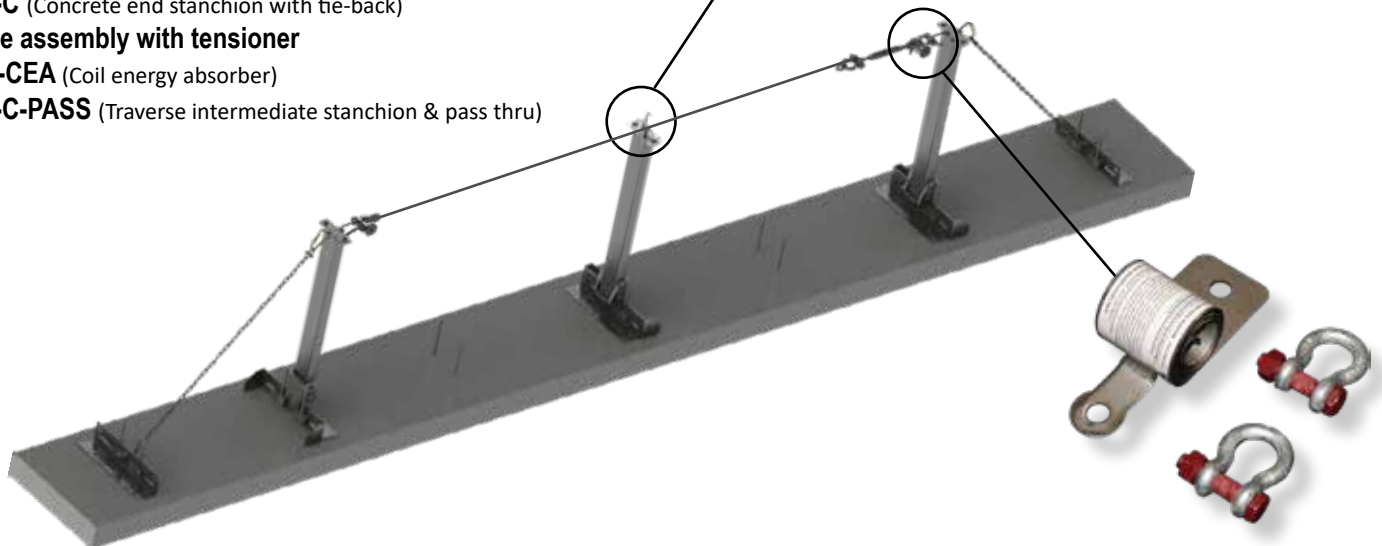

CHL-CEA



## Miniverse Horizontal Lifeline System

The Miniverse HLL system provides continuous fall protection and can be set up to any cable length with a maximum of 60' between posts. The stout yet discrete post design allows for permanent installation without the loss of building aesthetics.

- ♥ 12" or 18" working height (measured above working surface)
- ♥ Typical 60' system weighs approx. 94 lbs.
- ♥ Capacity: 2 users per span, no more than 6 per total system
- ♥ 310 lbs. total each user including tools & equipment
- ♥ Assembled in lengths from 10'-240' (call for price and lead time)

## Ordering Options

### TRV-G30

30' system, 1 CHL-CEA and connecting fasteners

### TRV-G80


80' system, 2 CHL-CEA and connecting fasteners

### TRV-G60

60' system, 1 CHL-CEA and connecting fasteners

### TRV-G120

120' system, 2 CHL-CEA and connecting fasteners



**1760-12-1525**  
12" anchor end post




**1760-12P**  
12" anchor end post with pass-thru



**1760BP**  
Backer plate for 1760 series post



**CHL-CEA**  
Steel energy absorber with shackles

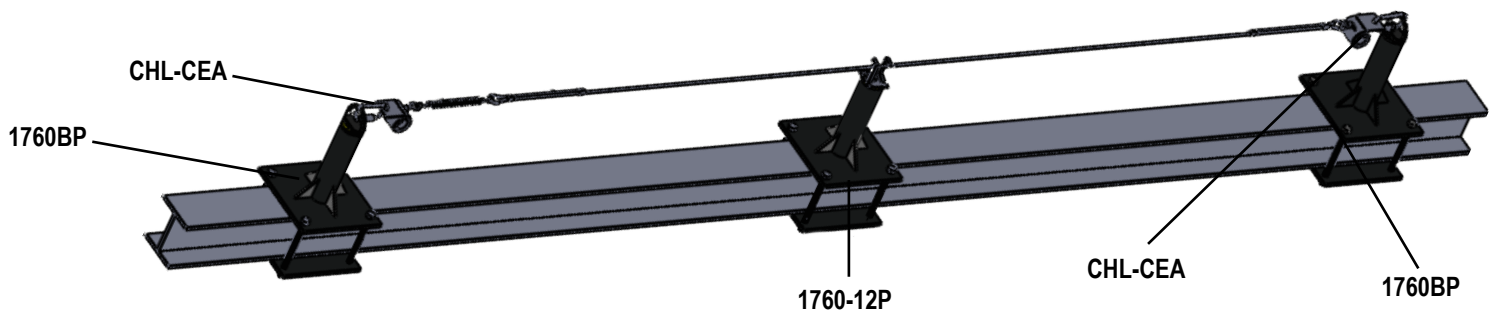



## Horizontal Lifeline

### Wire Rope Horizontal System

The CHL system is a highly portable lifeline and is ideal in situations such as welding, where sparks or harsh environment are present. The wire rope can be set in place for extended periods of time, or easily transported to a new location. Standard system includes:

- ♥ (1) Wire rope Lifeline assembly with tensioner
- ♥ (2) Sliding tie-off rings
- ♥ (1) Stainless steel coil energy absorber
- ♥ (2) 10' tie-off anchorage straps



#### CHL-30

Adjustable system to 30' in length  
2 workers per span

#### CHL-60

Adjustable system to 60' in length  
2 workers per span



## RHLD Horizontal Lifeline

### Synthetic Rope Horizontal System

Made out of high strength Nerex® rope, the RHLD system boasts an extremely lightweight design which is highly portable and easy to install. Providing safety and reliability, this system is ideal for maintenance, bridgework, construction and general industry applications.

- ♥ (1) Nerex® rope Lifeline assembly with tensioner
- ♥ (2) Sliding tie-off rings
- ♥ (1) Synthetic energy absorber
- ♥ (2) 6' tie-off anchorage straps



#### RHLD-30

Adjustable system to 30' in length  
2 workers per span

#### RHLD-60

Adjustable system to 60' in length  
2 workers per span







## GR200

### Portable Guardrail System

Setting up a portable guardrail system is a fundamental of fall prevention when working on open floors and roof tops. FrenchCreek's portable guardrail system provides a secure perimeter and is able to be installed on both a parapet, or on the edge of a concrete slab.

- ♥ Fits 4"-24" parapets and C-slabs
- ♥ Dual-use versatility for slab edge and parapet installations
- ♥ Secures with adjustable clamp lever
- ♥ Plated alloy steel provides corrosion and damage resistance
- ♥ Lightweight, one person setup & installation



## PacMule Firefighter Belt

### Designed for Firefighters Only!

The lightweight series of fireman's belts integrates 1 3/4" webbing rated at 6,000 lbs. Specially designed by firefighters, for firefighters.

- ♥ 4" Coolmax-Lined comfort pad with 3M Scotchlite reflective material
- ♥ Patented drop-down tool D-Rings with snap closures
- ♥ Forged front bailout ring, and choice of quick release front snap
- ♥ Exceeds NFPA standards for escape belts
- ♥ **Sizes available: S,M,L,XL,XXL (use NFPA size chart)**

### QN4107FB

Adjustable quick-clip escape belt  
2" forged front bailout D-Ring  
(2) 2" drop-down tool D-Rings

### QN4105FB

Adjustable quick-clip escape belt  
2" forged front bailout D-Ring  
(2) 3" drop-down tool D-Rings

### QL4107FB-18

Adjustable quick-clip escape belt  
1 3/4" forged front bailout D-Ring  
18" tie-off lanyard with 1 7/8" carabiner  
(2) 3" drop-down tool D-Rings

### QL4109FB-18

Adjustable quick-clip escape belt  
1 3/4" forged front bailout D-Ring  
18" tie-off lanyard with 1 7/8" carabiner  
(1) 3" drop-down tool D-Ring  
(1) 2" drop-down tool D-Ring

### GL4107FB-18

Adjustable tongue & grommet escape belt  
1 3/4" forged front bailout D-Ring  
18" tie-off lanyard with 1 7/8" carabiner  
(2) 3" drop-down tool D-Rings

### GL4109FB-18

Adjustable tongue & grommet escape belt  
1 3/4" forged front bailout D-Ring  
18" tie-off lanyard with 1 7/8" carabiner  
(1) 3" drop-down tool D-Ring  
(1) 2" drop-down tool D-Ring



QN4107FB



QL4107FB-18



GL 4107FB-18

### NFPA Sizing Chart

| Size  | S     | M     | L     | XL     | XXL   |
|-------|-------|-------|-------|--------|-------|
| Waist | 20-28 | 28-34 | 34-40 | 42-50  | 52-60 |
| Color | Green | Black | Blue  | Yellow | Red   |



**fcsafety.com**

©2025 FrenchCreek Production Inc.  
100 N. 13th St.  
Franklin, PA 16323

***Please call to locate your nearest distributor***

**877.228.9327**

**814.437.1808**

Tools shown not included.

Product descriptions and specifications  
herein may change without notice.

CAT2026

